



Bench Type



Short Pole Type



Bakery Type

UNI-9

User's Manual



Elevated Type



Self-service Type



Pole Type



Hanging Type

Ver. 0.00

IMPORTANT

- Read this manual thoroughly, and do not perform installation, operation, maintenance, or inspection unless you fully understand all of the contents.
- Keep this manual in a safe place where you can refer to it easily while installing, operating, and carrying out maintenance or inspections.

ISHIDA CO., LTD.

© ISHIDA Co., Ltd. 2013 All rights are reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means mechanical, electronic, photocopying, recording, or otherwise without prior written permission of ISHIDA.

NOTICES

IMPORTANT NOTICE

Those who handle the machine must be aware of the hazards involved. These dangers may not be obvious, so it is imperative to follow the instructions detailed in this manual when installing, operating, inspecting, or servicing the machine. Therefore, we recommend that you thoroughly read and understand this manual before installing, operating, inspecting, or servicing the machine.

ISHIDA is not liable for any damage, loss or injury that results from incorrect operation, insufficient caution, unauthorized modifications to the machine, or failure to follow the instructions contained in this manual.

LIMITATIONS OF LIABILITY

ISHIDA assumes no responsibility for special, indirect, or consequential damages, loss of profits or commercial loss in any way connected with the machine, whether such claim is based on contract, warranty, negligence, or strict liability.

ISHIDA assumes no responsibility for the user's programming of this machine, or any consequence thereof. In no event shall ISHIDA be responsible for warranty, repair, or other claims regarding the machine unless ISHIDA's analysis confirms that the machines were properly handled, stored, installed, and maintained and not subject to contamination, abuse, misuse, or inappropriate modification or repair.

CHANGE IN SPECIFICATIONS

Machine specifications and accessories may be changed at any time due to improvements or other reasons. Consult with your ISHIDA representative at any time to confirm the actual specifications of the purchased machine.

ERRORS AND OMISSIONS

The information in this manual has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors, or omissions.


PRECAUTIONS FOR SAFE USE

It is strongly advised that the following safety measures must be observed to ensure the safe operation of the machine.

WARNING

- **Prepare a dedicated power source and always use a power supply with rated voltage. Never connect the machine power input with an AC power supply exceeding the rated voltage. To avoid any potential electrical shock, ensure that the protective ground wire is connected to the main grounding provision.**

A power supply that generates voltage variation may cause a malfunction, or using the machine outside of the rated voltage may result in machine failure or danger such as electric shock.

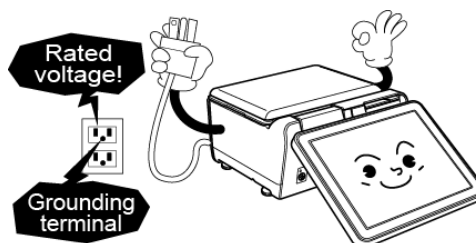

- **Do not install the machine near a TV set or radio.**

Doing so may cause static to the TV set and/or radio as this machine emits weak electric wave.



- **Do not allow water or any liquids to come into contact with the machine.**

Doing so may result in fire or cause the machine to break down.



- **Do not drop or apply a strong shock to the machine.**

Doing so may cause the machine to break down.



- **Do not disassemble, modify, or attempt to repair the machine.**

Doing so may damage the original safety functions.



WARNING

- **Do not hold the connector cover when carrying the machine.**

Dropping the machine may result in injury or cause the machine to break down.

- **Do not hold the operation panel or weigh platter when carrying the machine.**

Doing so may cause the operation panel or the platter to break down.

- **Do not hold the pole type display when carrying the machine.**

Dropping the machine may result in injury or cause the machine to break down.

- **Handle with care when removing or inserting the cassette.**


Careless cassette handling may result in injury or cause the cassette to break down.

- **Do not drop the cassette.**

Dropping the cassette may result in injury or cause the cassette to break down.

- **Do not press the touch panel with an edged thing.**

Doing so may scratch the panel and cause the machine to break down.

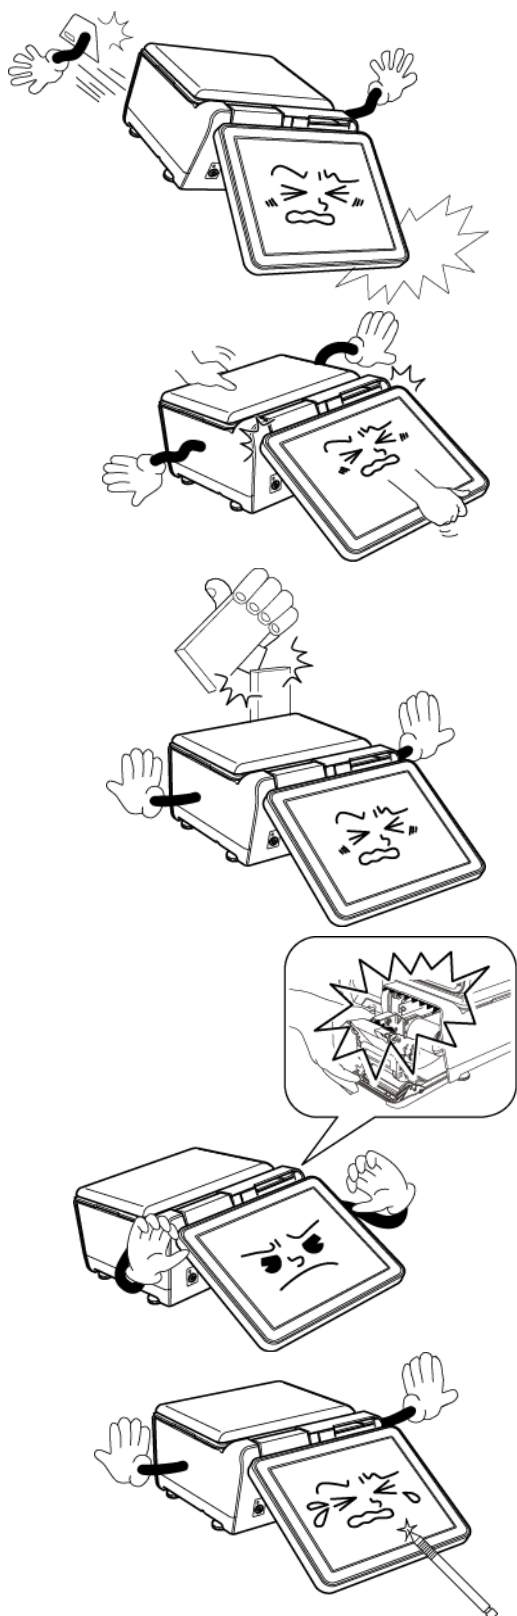

⚠ WARNING

- Risk of explosion if battery is replaced by an incorrect type. Make sure to dispose of used batteries according to the instructions.






PRECAUTIONS FOR MACHINE INSTALLATION



WARNING

Do not install the machine in the following types of places:

- Places subject to high temperatures or high humidity
- Places exposed to direct sunlight
- Places where water or other liquids are easily spilled on the machine
- Places subject to excessive vibration or unstable foundations
- Places exposed to direct cold air from air conditioners or refrigerators
- Places where the floor or foundation is unstable
- Places subject to a lot of dust or dirt
- Places with large voltage fluctuations

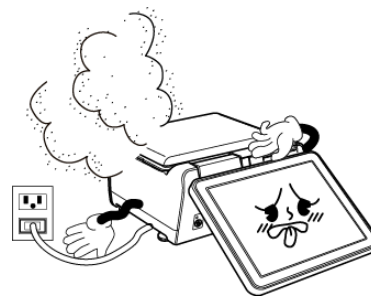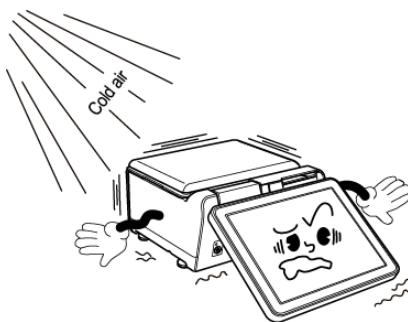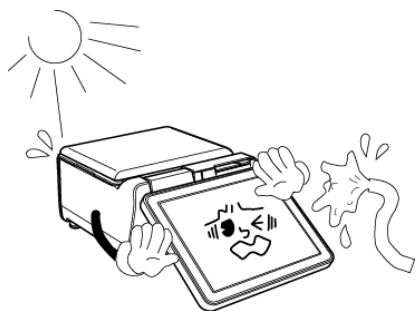

PRECAUTION SYMBOLS

This machine is manufactured for use according to proper procedures by a qualified person and only for the purposes described in this manual. The following conventions are used to indicate and classify precautions depending on the level of danger, or seriousness of potential injury. Always heed the information provided in this manual. Failure to heed precautions can result in personal injury or property damage.

The following precaution symbols are used in this manual.

	Indicates a potentially hazardous situation which, if not avoided, may result in serious injury or death. Additionally, there may be significant property damage.
	Indicates a potentially hazardous situation where, if not avoided, may result in minor or moderate injury or in property damage.
	Indicates reference information for operation.
	Indicates the referred page for operation.

TABLE OF CONTENTS

CHAPTER 1	BEFORE USE.....	1-1
1.1	SPECIFICATIONS.....	1-1
1.2	PART NAMES.....	1-2
1.3	LEVEL ADJUSTMENT.....	1-3
1.4	LABEL / RECEIPT ROLL LOADING.....	1-4
1.5	REMOVING & REPLACING OF WEIGHING PLATTER.....	1-6
1.5.1	REMOVING THE WEIGHING PLATTER.....	1-6
1.5.2	REPLACING THE WEIGHING PLATTER.....	1-6
1.6	CLEANING OF THE MACHINE.....	1-7
1.6.1	CLEANING OF THE THERMAL HEAD.....	1-7
1.6.2	CLEANING OF THE LABEL SENSOR.....	1-8
1.6.3	CLEANING OF THE PRINT ROLLER AND PRISM.....	1-9
1.6.4	PRECAUTIONS WHEN USING CLEANING FLUIDS.....	1-10
1.7	STARTING PROCEDURES.....	1-11
1.7.1	TURNING ON THE POWER.....	1-11
1.7.2	ZERO ADJUSTMENT.....	1-12
1.7.3	GETTING BACK TO THE INITIAL SCREEN.....	1-12
CHAPTER 2	OPERATION MODE.....	2-1
2.1	OPERATION MODE ENTRY / EXIT.....	2-1
2.2	SCREEN EXAMPLES FOR PRODUCT CATEGORIES.....	2-2
2.3	SALES OPERATIONS.....	2-4
2.3.1	ISSUING LABELS FOR WEIGHING PRODUCTS.....	2-4
2.3.2	ISSUING LABELS FOR WEIGHING FIXED PRICE PRODUCTS.....	2-6
2.3.3	ISSUING LABELS FOR FIXED PRICE PRODUCTS.....	2-8
2.3.4	ISSUING LABELS FOR FIXED WEIGHT/UNIT PRICE PRODUCTS.....	2-10
2.3.5	ISSUING LABELS REQUIRING OPERATOR REGISTRATION.....	2-12
2.3.6	ISSUING RECEIPTS BY THE SAME OPERATOR.....	2-14
2.3.7	ISSUING RECEIPTS BY DIFFERENT OPERATORS.....	2-20
2.3.8	VOIDING PRODUCT REGISTRATIONS.....	2-26
2.3.9	ENTERING OR OVERWRITING TARE WEIGHTS.....	2-28
2.3.10	CHANGING UNIT PRICES.....	2-28
2.3.11	CHANGING FIXED PRICES.....	2-29
2.3.12	DISCOUNTING UNIT PRICES BY AMOUNT.....	2-29
2.3.13	DISCOUNTING UNIT PRICES BY PERCENTAGE.....	2-30
2.3.14	DISCOUNTING TOTAL PRICES BY AMOUNT.....	2-30
2.3.15	DISCOUNTING TOTAL PRICES BY PERCENTAGE.....	31
2.3.16	CHANGING QUANTITIES.....	31
2.3.17	SPECIFYING THE NUMBER OF LABELS.....	32
2.3.18	SELF-SERVICE OPERATIONS FOR WEIGHING PRODUCTS.....	33
2.3.19	SELF-SERVICE OPERATIONS FOR FIXED PRICE PRODUCTS.....	34
2.3.20	ACCUMULATIONS THROUGH MANUAL ENTRY.....	35

2.3.21	ACCUMULATIONS THROUGH WEIGHING PRODUCTS.....	37
2.3.22	VOIDING REGISTRATIONS THROUGH MANUAL ENTRY	39
2.3.23	VOIDING THROUGH WEIGHING PRODUCTS	41
2.3.24	SUBTRACTING TOTALS THROUGH MANUAL ENTRY	43
2.3.25	SUBTRACTING TOTALS THROUGH WEIGHING PRODUCTS	45
2.3.26	ADDING TOTALS THROUGH MANUAL ENTRY	47
2.3.27	ADDING TOTALS THROUGH WEIGHING PRODUCTS	49
CHAPTER 3	TOTAL MODE	3-1
3.1	TOTAL MODE ENTRY / EXIT	3-1
3.2	DAILY TOTALS	3-2
3.3	WEEKLY TOTALS	3-5
3.4	CUMULATIVE TOTALS	3-6
3.5	TRACEABILITY TOTALS.....	3-8
3.6	PRESET REPORTS	3-9
3.7	TOTAL CLEAR.....	3-10
CHAPTER 4	PROGRAM MODE.....	4-1
4.1	PROGRAM MODE ENTRY / EXIT	4-1
4.2	PLU DATA.....	4-2
4.3	CAMPAIGN DATA.....	4-11
4.4	OPERATOR DATA.....	4-13
4.5	PRESET KEY REGISTRATION.....	4-15
4.5.1	SETTING PRESET GROUPS AND PAGES	4-15
4.5.2	SETTING PRESET KEYS.....	4-16
4.5.3	CHANGING PRESET KEY SIZES AND POSITIONS	4-18
4.5.4	EDITING PRESET KEYS.....	4-19
4.5.5	DELETING PRESET KEYS	4-24
4.6	ADVERTISEMENT MESSAGES	4-25
4.7	SCHEDULE DATA	4-28
4.8	STORE DATA	4-30
4.9	DEPARTMENT NAME DATA	4-33
4.10	GROUP NAME DATA	4-35
4.11	COOKING INSTRUCTION DATA	4-37
4.12	EXTRA MESSAGE DATA	4-39
4.13	COUPON MESSAGE DATA	4-41
4.14	POP MESSAGE DATA	4-43
4.15	SCHEME TABLE DATA	4-45
4.16	GEN TABLE DATA.....	4-49
4.17	LOOKUP TABLE DATA.....	4-51
4.18	MINCE TRACEABILITY DATA.....	4-54
4.19	FIXED PRICE SYMBOLS.....	4-55
4.20	FREE MESSAGE DATA	4-57


4.21	CHECK LABEL DATA	4-59
4.22	STAMP PRICE DATA.....	4-60
4.23	NUTRITION TEXT DATA	4-61
CHAPTER 5	SETUP MODE	5-1
5.1	SETUP MODE ENTRY / EXIT	5-1
5.2	MACHINE NUMBER / NETWORK NUMBER.....	5-2
5.3	SALES MODE	5-4
5.4	PASSWORD	5-5
5.5	KEY LOCK.....	5-8
5.6	DATA STORAGE	5-11
5.7	PRESET REPORT	5-12
5.8	PLU OVERWRITE	5-14
5.9	PLU INITIAL DATA.....	5-16
5.10	PLU UPDATE	5-24
5.11	RECEIPT SETTING.....	5-27
5.12	TAX REGISTRATION	5-29
CHAPTER 6	ADJUSTMENT MODE	6-1
6.1	ADJUSTMENT MODE ENTRY / EXIT	6-1
6.2	DATE / TIME.....	6-2
6.3	TOUCH SCREEN.....	6-4
6.4	DISPLAY CHECK	6-5
6.5	SOUND.....	6-6
APPENDIX	TEXT EDITING.....	A-1
A.1	EDIT SCREENS	A-1
A.2	EDIT KEYS.....	A-2
A.3	INPUT EXAMPLES.....	A-4
A.3.1	TEXT EDITING	A-4
A.3.2	FONT STYLE SELECTION.....	A-5
A.3.3	LINE DATA DELETION	A-6
A.3.4	DATA ERASE	A-7
A.3.5	DATA COPY	A-8

BEFORE USE

1.1 specifications

UNIT	ITEM	DESCRIPTIONS
Weighing unit	Weighing capacity	6 kg specification: 0 to 3 kg / 1 g, 3 to 6 kg / 2 g
	Weighting accuracy	1/3000
Operation panel unit	Display method	8.4 inch color TFT liquid crystal display with LED backlight, Screen resolution SCGA (800 X 600 dots)
Customer display unit	Display method	(1) 7 inch color TFT liquid crystal display with LED backlight, Screen resolution SCGA (800 X 600 dots) (2) 12.1 inch color TFT liquid crystal display with LED backlight, Screen resolution SCGA (800 X 600 dots)
Printer unit	Printing method	Direct thermal method
	Thermal head	3 inches (960 dots) and 12 dots/mm
	Printing speed	120 mm/second <i>Note: The printing speed may vary depending on the label conditions.</i>
	Printing effective size	80 mm in width
	Label roll size	Label width: 30 to 80 mm Label length: 20 to 100 mm
Cassette unit	Label replacement No. of cassettes Label roll size	Front loading cassette Up to 7 cassettes can be used. Roll outside diameter: $\phi 100$ mm max. Paper core inside diameter: $\phi 40$ mm ± 1 mm
Others	Power supply	100 to 240 VAC, 50/60Hz
	Use conditions	Temperature: 0 to 40°C Humidity: 20 to 85%, non-condensing.
	Input / Output	LAN: 1 channel USB: 4 channels SD: 1 channel Cash drawer: 1 channel



1.2 PART NAMES

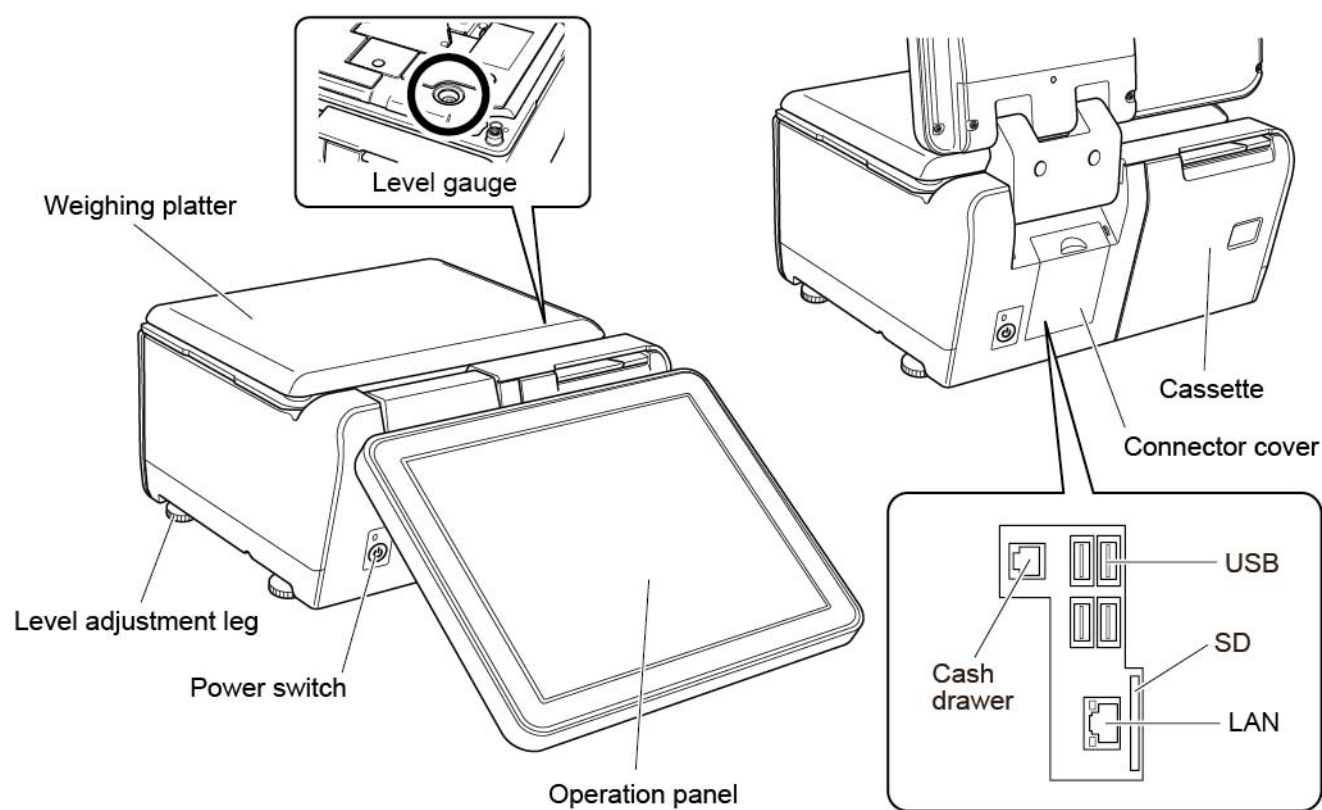Bench Type

1.3 Level Adjustment

CAUTION Install the machine horizontally to use.

Be sure to turn off the power switch before placing the machine on a stable platform, and adjust the machine inclination by turning the four level adjustment legs so that the bubble is located at the center of the level gauge. Accurate measurements cannot be performed if it is not installed horizontally.

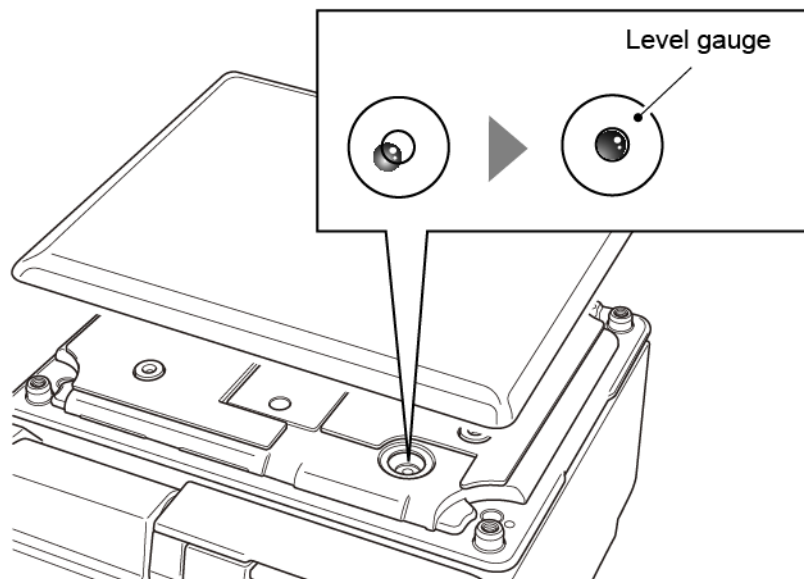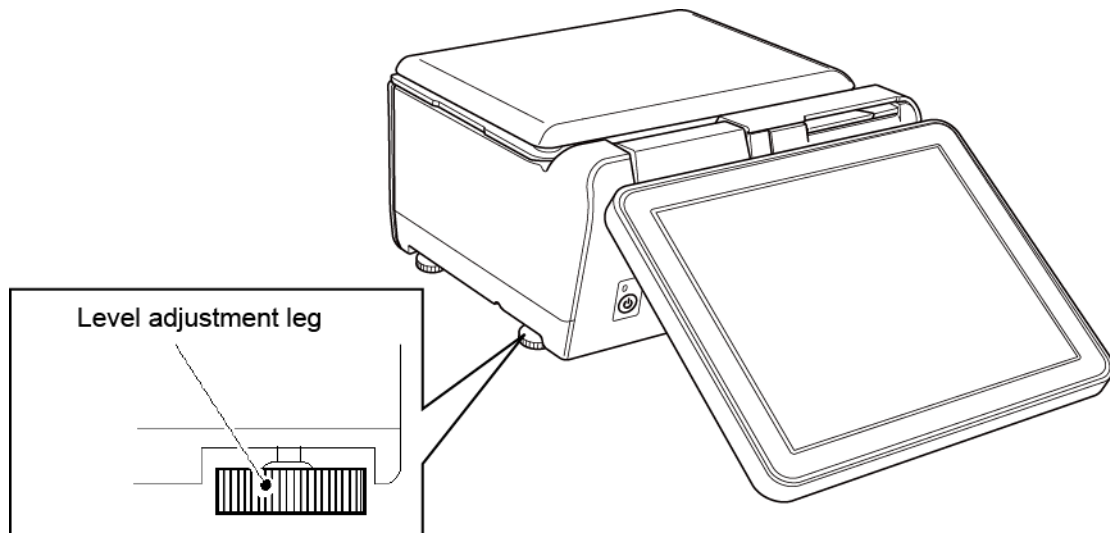


1.4 label / receipt roll Loading


1. Pull out the cassette from the main body.



CAUTION
Before pulling out the cassette unit, ensure that nothing is placed on the weighing platter.

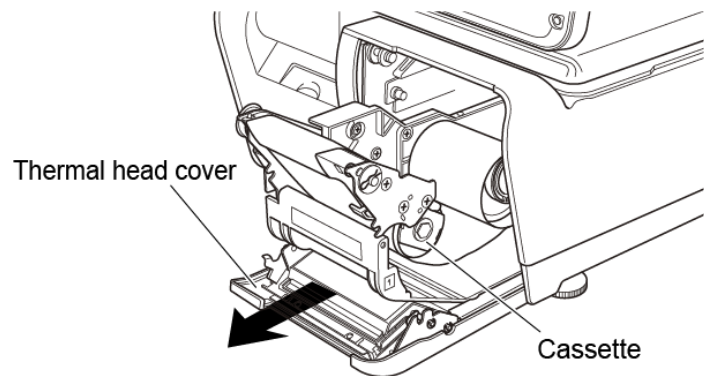


2. Set a new roll around the roll holder and raise the roll stopper to fix the roll position.

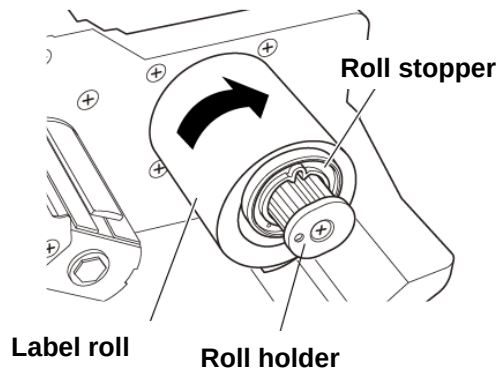


3. Thread the paper as shown in the figures below.


Label Threading

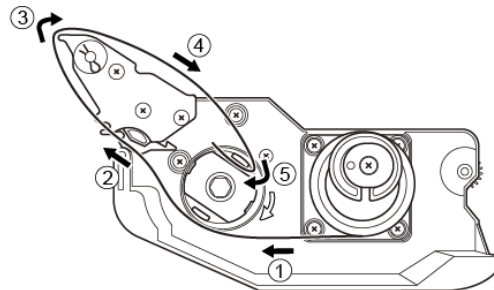

Receipt Threading

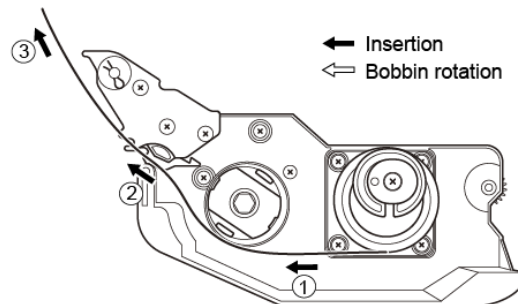


4. For labels, fix the paper end with the backing paper stopper, and gently turn the winding bobbin clockwise until the label becomes tight.

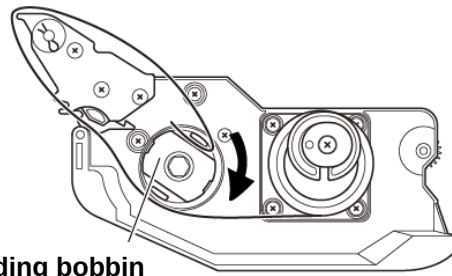

Winding bobbin

5. Slide the label/receipt guide to help smooth paper feeding according to the paper width.

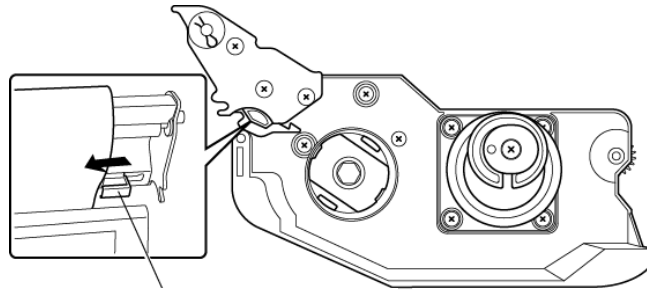


Label / Receipt guide

6. Push the cassette straight into the main body to return to its original position.

CAUTION

- Before inserting the cassette unit into the main body, ensure that nothing sticks to the magnet on the bottom of the cassette unit.
- Push the cassette slowly into the main body so as not to get your fingers caught.

Thermal head cover

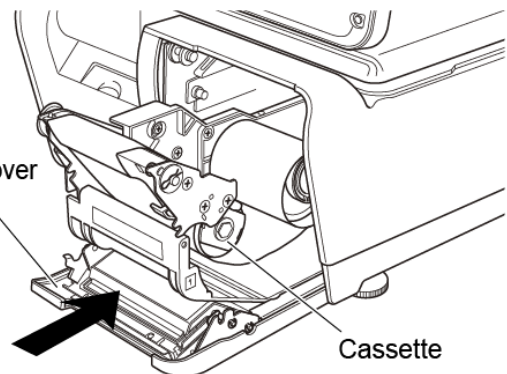


Cassette

7. Press the [FEED] key to issue a label. At this time, confirm that the label is completely peeled off.

CAUTION

Confirm that the backing paper is wound up smoothly. If the backing paper is wound up diagonally, check that the label is set correctly.

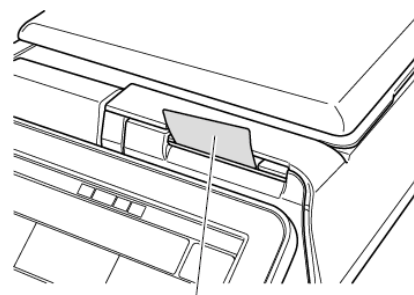


Label

1.5 removing & replacing of weighing platter


1.5.1 REMOVING THE WEIGHING PLATTER

When removing the weighing platter from the main body, lift the front side to pull out the two pins from the two rubber platter holders and remove the platter by pulling it to disengage the two hooks at the rear side of the platter.

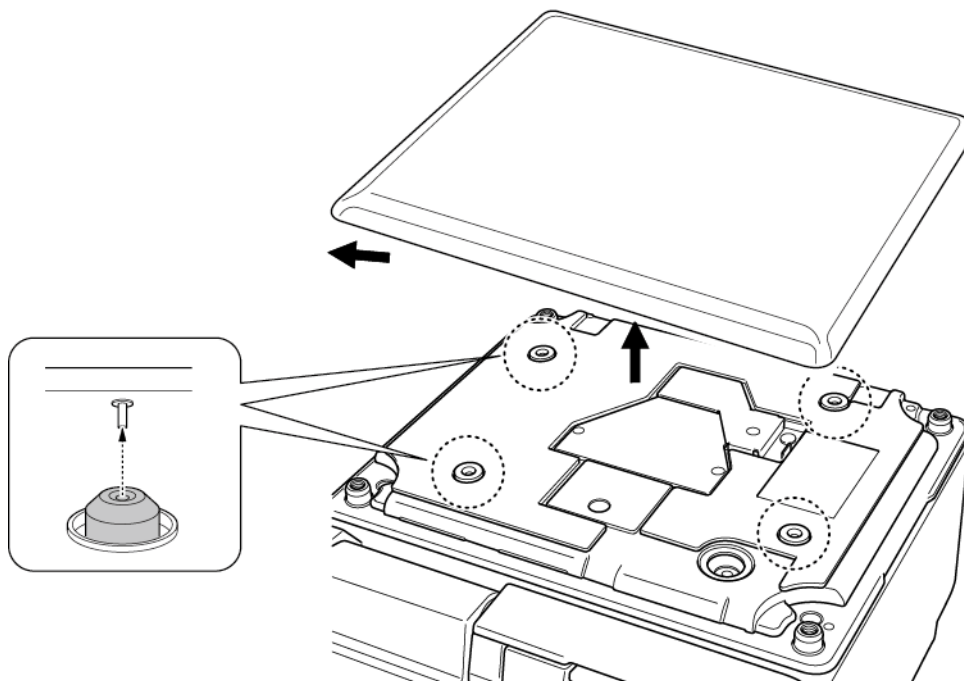

1.5.2 REPLACING THE WEIGHING PLATTER

When replacing the weighing platter onto the main body, engage the two hooks at the rear side of the platter and lower the platter so that the two pins on the bottom of the platter are inserted into holes of the rubber platter holders.

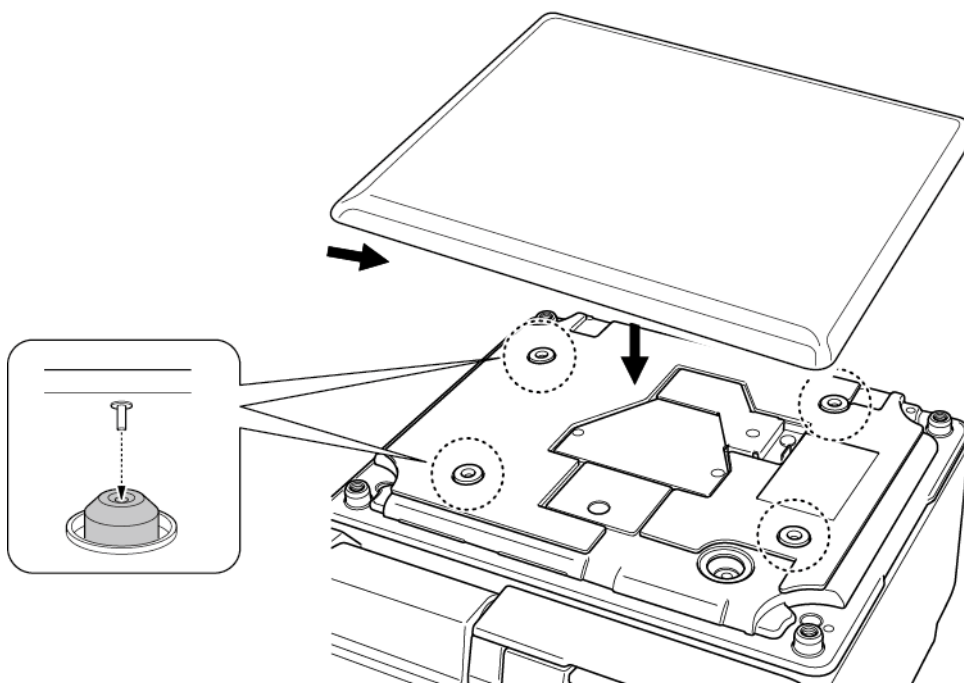


1.6 Cleaning of the machine

1.6.1 CLEANING OF THE THERMAL HEAD


1. Pull out the cassette from the main body.

CAUTION

Before pulling out the cassette unit, ensure that nothing is placed on the weighing platter.

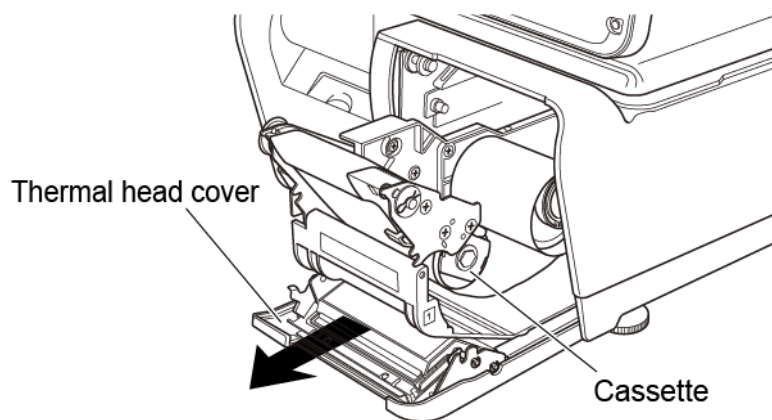

2. Use a cotton-tipped swab to clean off the thermal head.

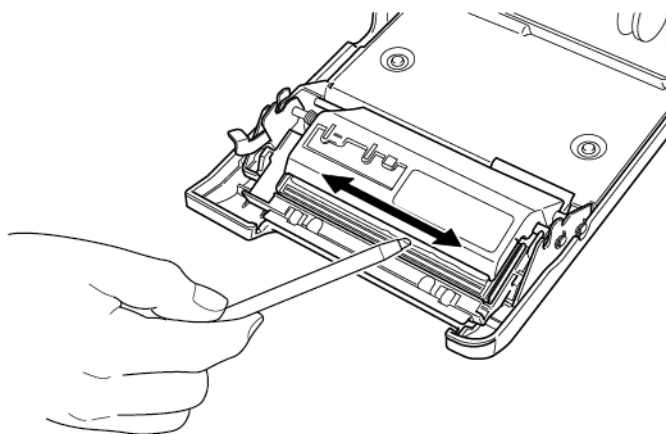


1.6.2 CLEANING OF THE LABEL SENSOR


1. Pull out the cassette from the main body.

CAUTION

Before pulling out the cassette unit, ensure that nothing is placed on the weighing platter.

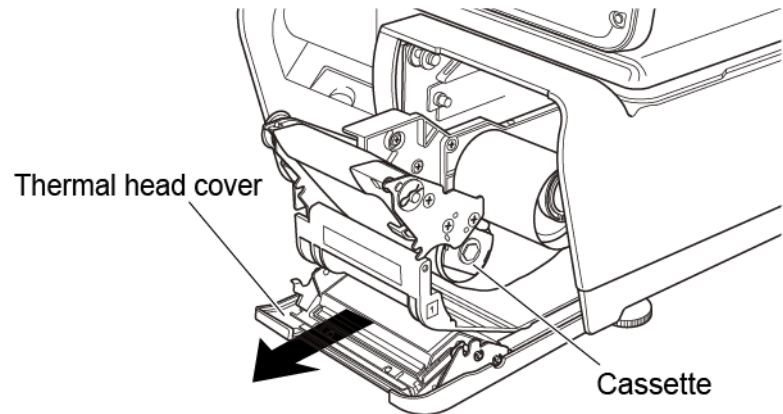

2. Use a dry cloth to clean off the emitter and receiver of the label sensor.

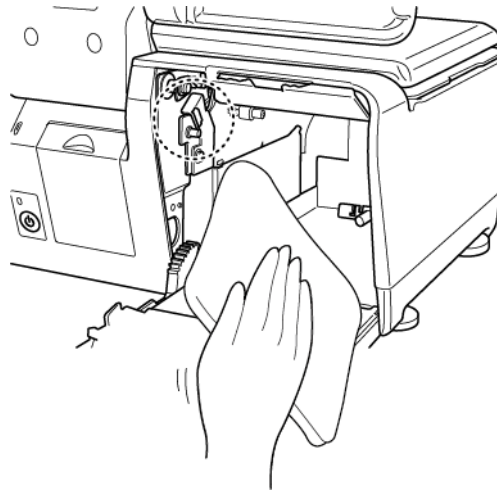


1.6.3 CLEANING OF THE PRINT ROLLER AND PRISM


1. Pull out the cassette from the main body.

CAUTION

Before pulling out the cassette unit, ensure that nothing is placed on the weighing platter.

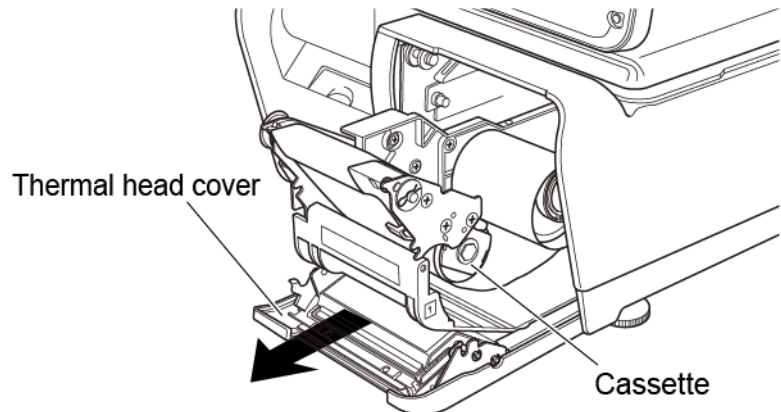

2. Use a dry cloth to clean off the print roller and prism.

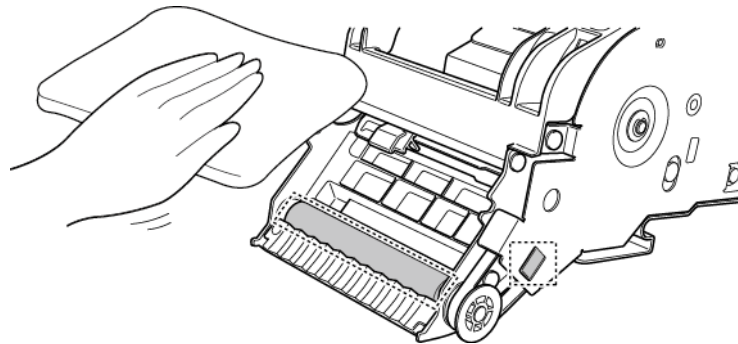

1.6.4

PRECAUTIONS WHEN USING CLEANING FLUIDS

CAUTION

Use a soft cloth and a neutral detergent to clean the machine.

Do not use thinner, benzene, etc. Doing so may damage the original safety functions.

For some parts, use cleaning fluid (isopropyl alcohol).

**CAUTION**

- Do not use cleaning fluid near fire as the fluid is flammable.
- Do not use cleaning fluid in a poorly ventilated area. Always provide adequate ventilation when cleaning.

Take the following actions in the event of an accident:**If the fluid gets in your eye**

- Immediately wash your eye(s) with water for at least 15 minutes, and consult your doctor.
- If you wear contact lenses, remove and wash them.

If the fluid comes into contact with your skin

- Immediately rinse the area of contact with water, and then wash with soap.
- If you notice any skin abnormalities at the area of contact, or if any pain persists, consult your doctor.

If the fumes of the fluid are inhaled

- Immediately move the victim to an area where fresh air is available, and have the victim lie down and keep warm.
- If breathing becomes difficult or stops, provide artificial respiration and seek medical attention immediately.


If the fluid is swallowed

- Do not try to induce vomiting.
- Do not give the victim anything to drink, and do not rinse the mouth.
- If vomiting occurs naturally, have the victim lean forward to reduce risk of aspiration.
- Keep the victim warm and seek medical attention.

1.7 STARTING PROCEDURES


1.7.1 TURNING ON THE POWER

1. Push down the Power Switch to turn on the power.

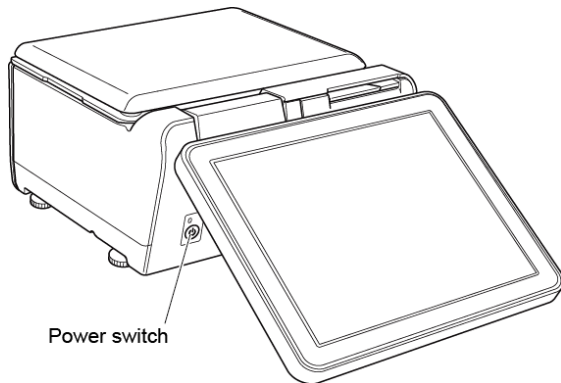

2. The "Clock Check" screen is displayed. Check that displayed date and time agree with the current date and time, and press the [ENTER] button on the screen to proceed to the next step.

Note: Refer to the "Date/Time" menu in Adjustment Mode when changing date or time.

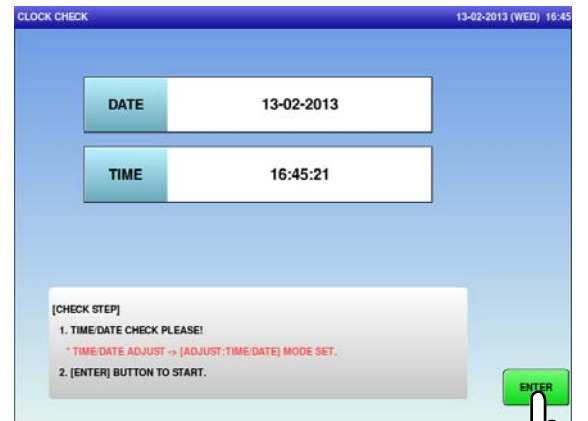

3. The initial screen is displayed.
Note: The contents of the initial screen may differ depending on the settings on your machine.



1.7.2 ZERO ADJUSTMENT


1. If the “ZERO” indicator does not appear in the “WEIGHT” field on the initial screen, press the [ZERO] key.
2. The “ZERO” indicator lights up and the weight value becomes zero.



1.7.3 GETTING BACK TO THE INITIAL SCREEN

1. To get back to the initial screen from a Menu selection screen, press the [SALES] button at the bottom right on the screen.
2. The initial screen is displayed.

Note: The contents of the initial screen may differ depending on the settings on your machine.

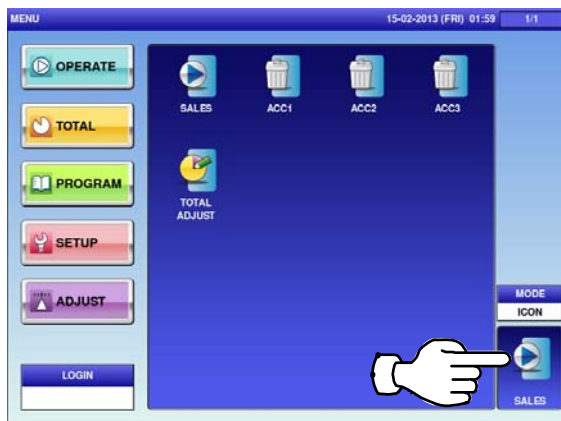


OPERATION MODE


2.1 OPERATION MODE ENTRY / EXIT

Ensure that the initial screen is displayed.
Then, press the Return button to display the
“Menu” screen.

Note: The contents of the initial screen may differ
depending on the settings on your machine.

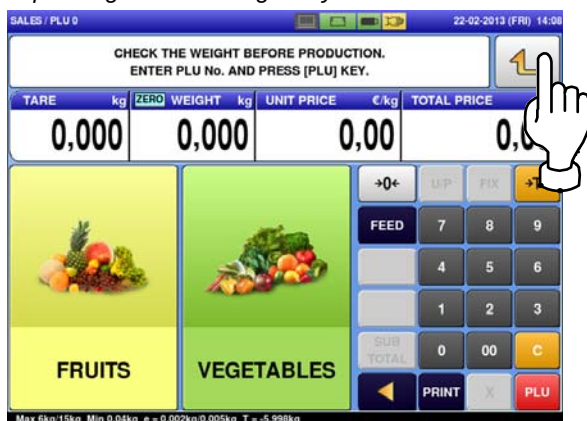

The “Menu” screen is displayed.

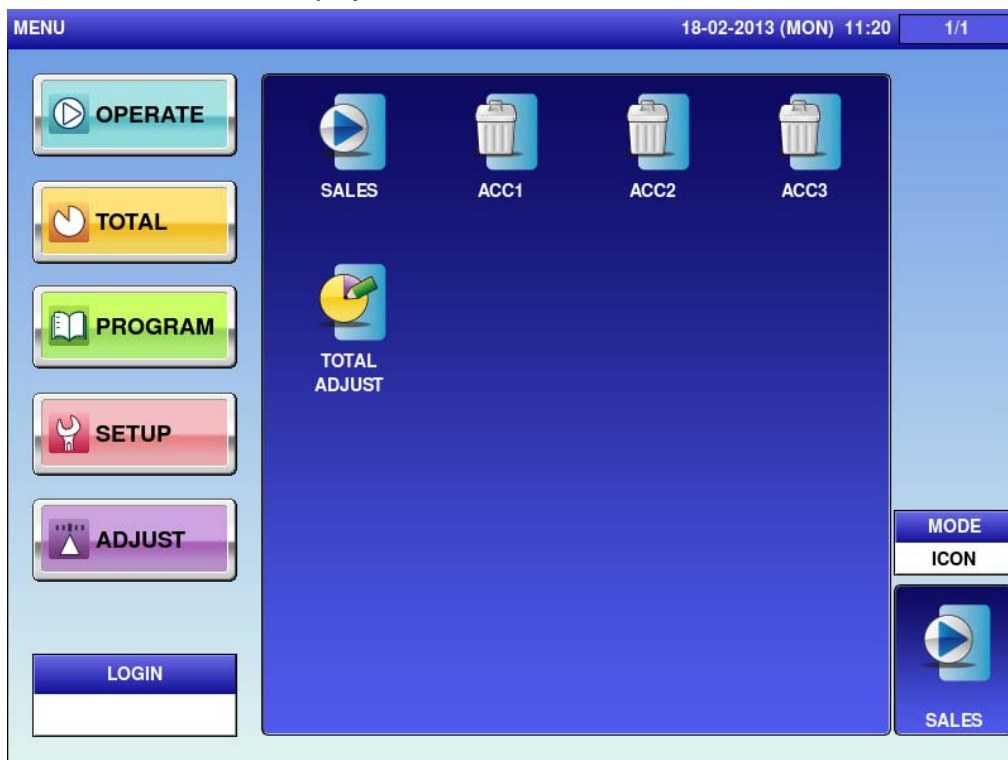

Note: To exit the Operation Mode, press the [SALES] button.

2.2 SCREEN EXAMPLES FOR PRODUCT CATEGORIES

Weighing Products

SALES / PLU 1 15-02-2013 (FRI) 14:11

BANANE
BANANA

TARE	kg	ZERO	WEIGHT	kg	UNIT PRICE	€/kg	TOTAL PRICE	€
0,000		0,000			1,23		0,00	

PACK DATE
15-02-2013

SELL BY DATE
16-02-2013

CSIS
 →T←

PRN MD.
MANUAL

TARE 0.012kg
 FEED

TARE 0.018kg
 PEEL

JACK BETTY JONE

ERIC JODY OPE 6

- %
 0.0

SPECIAL
 0,00

- \$
 0,00

SP.(U/P)
 0,00

OPE 7 OPE 8 OPE 9

OPE 10 →0← DISP IMG LD.

SUB TOTAL
 0 00

PRINT X

7 8 9

4 5 6

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg
PLU

Weighing Fixed Price Products

SALES / PLU 1 15-02-2013 (FRI) 14:13

BANANE
BANANA

TARE	kg	ZERO	WEIGHT	kg	FIXED PRICE	€
0,000		0,000			1,23	

PACK DATE
15-02-2013

SELL BY DATE
16-02-2013

CSIS
 →T←

PRN MD.
MANUAL

TARE 0.012kg
 FEED

TARE 0.018kg
 PEEL

JACK BETTY JONE

ERIC JODY OPE 6

- %
 0.0

SPECIAL
 0,00

- \$
 0,00

SP.(U/P)

OPE 7 OPE 8 OPE 9

OPE 10 →0← DISP IMG LD.

SUB TOTAL
 0 00

PRINT X

7 8 9

4 5 6

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg
PLU

Non-weighing Fixed Price Products

SALES / PLU 1 15-02-2013 (FRI) 14:12

**BANANE
BANANA**

PCS	FIXED WT kg	FIXED PRICE €	TOTAL PRICE €
1		1,23	1,23

PACK DATE 15-02-2013

SELL BY DATE 16-02-2013

JACK BETTY JONE

ERIC JODY OPE 6

OPE 7 OPE 8 OPE 9

OPE 10 →0← DISP IMG LD.

CSIS

PRN MD. MANUAL

PEEL MD. PEEL

- % 0.0 - \$ 0,00

SPECIAL 0,00 SP.(U/P) 0,00

- %(U/P) 0.0 - \$(U/P) 0,00

→0← U/P FIX

FEED 7 8 9

4 5 6

1 2 3

SUB TOTAL 0 00 C

PRINT X PLU

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg

Non-weighing Fixed Weight/Unit Price Products

SALES / PLU 1 15-02-2013 (FRI) 14:13

**BANANE
BANANA**

	FIXED WT kg	FIXED U.PRI €/kg	TOTAL PRICE €
		1,23	0,00

PACK DATE 15-02-2013

SELL BY DATE 16-02-2013

JACK BETTY JONE

ERIC JODY OPE 6

OPE 7 OPE 8 OPE 9

OPE 10 →0← DISP IMG LD.

CSIS

PRN MD. MANUAL

PEEL MD. PEEL

- % 0.0 - \$ 0,00

SPECIAL 0,00 SP.(U/P) 0,00

- %(U/P) 0.0 - \$(U/P) 0,00

→0← U/P FIX

FEED 7 8 9

4 5 6

1 2 3

SUB TOTAL 0 00 C

PRINT X PLU

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg

2.3 SALES OPERATIONS

2.3.1 ISSUING LABELS FOR WEIGHING PRODUCTS


1.

Press the "SALES" icon on the operation menu selection screen.



The initial screen is displayed.

Note: The contents of the initial screen may differ depending on the settings on your machine.

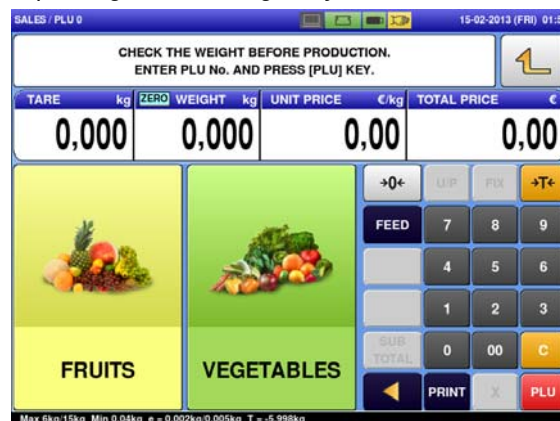


2.

Enter a PLU number and press the [PLU] key on the keypad.

Note: If "ZERO" is not indicated on the screen, press [→0←] on the keypad.

EXAMPLE

PLU No.3

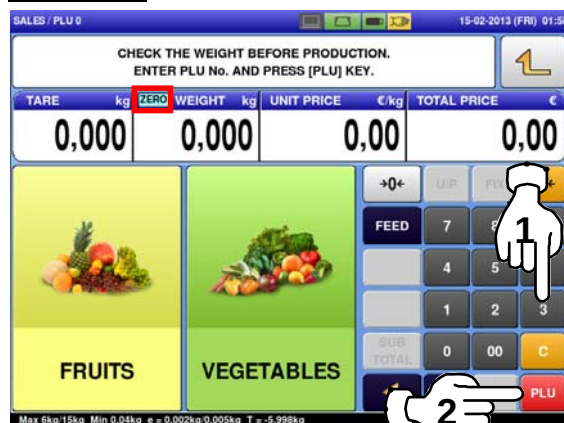

OR

Press a preset product department key to display the associated screen.

EXAMPLE

"FRUITS" department



Then, press the preset PLU key where the product is assigned.

EXAMPLE

"Red Grape" (weighing product)



3. The designated weighing PLU screen is displayed.

EXAMPLE

A product to which its unit price and tare weight were set beforehand.

SALES / PLU 3 15-02-2013 (FRI) 02:23

RAISIN ROUGE
RED GRAPE

PT	kg	NET WT	kg	UNIT PRICE	€/kg	TOTAL PRICE	€
0,050		-0,050		3,45		0,00	

PACK DATE: 15-02-2013
SELL BY DATE: 18-02-2013

PRN MD: MANUAL
TARE 0.012kg
FEED 7 8 9
PEEL MD: PEEL
TARE 0.018kg
4 5 6
1 2 3
0 00 C
PRINT X PLU

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg

- 4.

Put the product on the weighing platter.

PRODUCT



The product is weighed and its total price is calculated.

SALES / PLU 3 15-02-2013 (FRI) 02:23

RAISIN ROUGE
RED GRAPE

PT	kg	NET WT	kg	UNIT PRICE	€/kg	TOTAL PRICE	€
0,050		0,350		3,45		1,21	

PACK DATE: 15-02-2013
SELL BY DATE: 18-02-2013

PRN MD: MANUAL
TARE 0.012kg
FEED 7 8 9
PEEL MD: PEEL
TARE 0.018kg
4 5 6
1 2 3
0 00 C
PRINT X PLU

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg

- 5.

Press the [PRINT] key to issue a label when "MANUAL" is set in the "Print Mode" field.

Note: A label is automatically issued when "AUTO" is set in the "Print Mode" field.

SALES / PLU 3 15-02-2013 (FRI) 02:23

RAISIN ROUGE
RED GRAPE

PT	kg	NET WT	kg	UNIT PRICE	€/kg	TOTAL PRICE	€
0,050		0,350		3,45		1,21	

PACK DATE: 15-02-2013
SELL BY DATE: 18-02-2013

PRN MD: MANUAL
TARE 0.012kg
FEED 7 8 9
PEEL MD: PEEL
TARE 0.018kg
4 5 6
1 2 3
0 00 C
PRINT X PLU

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg



Non-traceable products



Traceable products

2.3.2 ISSUING LABELS FOR WEIGHING FIXED PRICE PRODUCTS

1.

Press the "SALES" icon on the operation menu selection screen.



The initial screen is displayed.

Note: The contents of the initial screen may differ depending on the settings on your machine.




2.

Enter a PLU number and press the [PLU] key on the keypad.

Note: If "ZERO" is not indicated on the screen, press [→0←] on the keypad.

EXAMPLE

PLU No.29

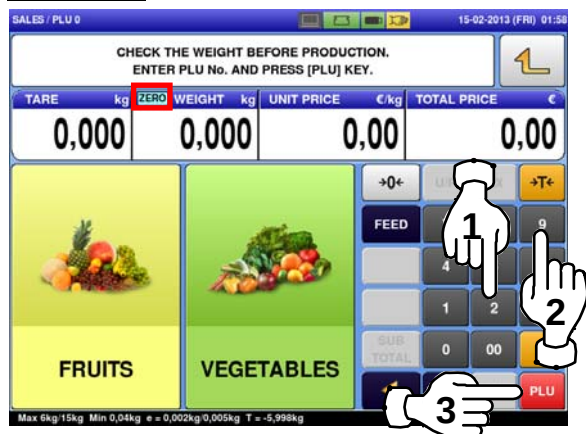

OR

Press a preset product department key to display the associated screen.

EXAMPLE

"VEGETABLES"


department



Then, press the preset PLU key where the product is assigned.

EXAMPLE

"ANISE" (weighing product)

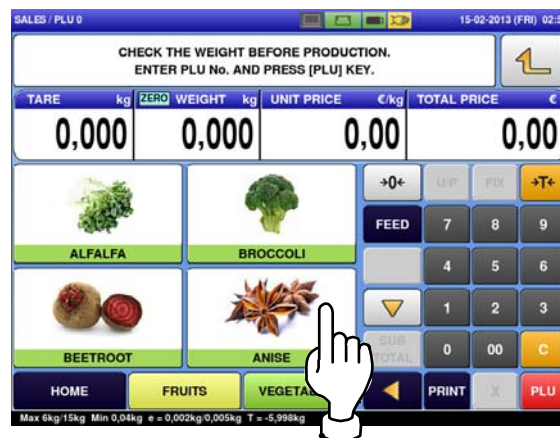

3. The designated weighing PLU screen is displayed.

EXAMPLE

A product to which its tare weight and price were set beforehand.



4. Put the product on the weighing platter.




The product is weighed, but its price stays the same.




5. Press the [PRINT] key to issue a label when "MANUAL" is set in the "Print Mode" field.

Note: A label is automatically issued when "AUTO" is set in the "Print Mode" field.



Non-traceable products



Traceable products

2.3.3 ISSUING LABELS FOR FIXED PRICE PRODUCTS


1.

Press the "SALES" icon on the operation menu selection screen.



The initial screen is displayed.


Note: The contents of the initial screen may differ depending on the settings on your machine.

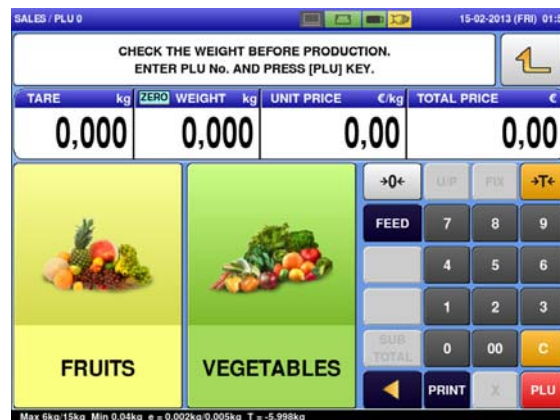

2.

Enter a PLU number and press the [PLU] key on the keypad.

Note: If "ZERO" is not indicated on the screen, press [→0←] on the keypad.

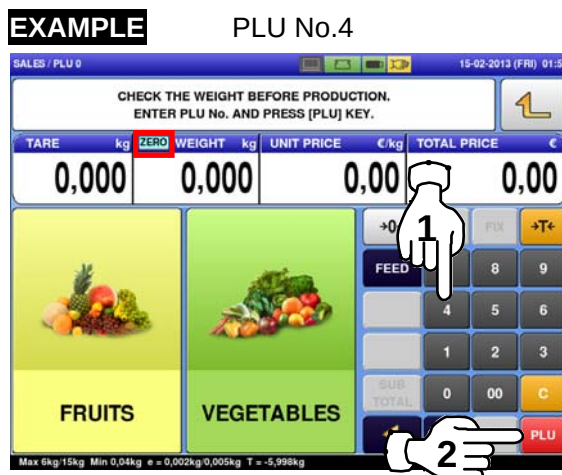

OR


Press a preset product department key to display the associated screen.

EXAMPLE "FRUITS" department



Press the preset PLU key where the product is assigned.

EXAMPLE
"Apple Royal" (non-weighing product)

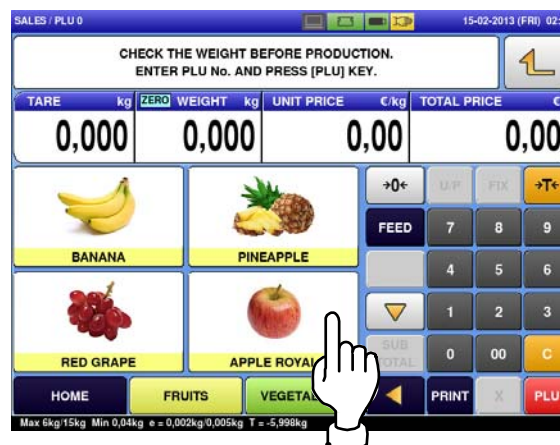


3. The designated non-weighing PLU screen is displayed.




4. Press the [PRINT] key to issue labels when "MANUAL" is set in the "Print Mode" field.

Note: Labels are automatically issued when "AUTO" is set in the "Print Mode" field.



Non-traceable products



Traceable products

Note: To stop printing, press the [PRINT] key again.

2.3.4 ISSUING LABELS FOR FIXED WEIGHT/UNIT PRICE PRODUCTS

1.

Press the "SALES" icon on the operation menu selection screen.



The initial screen is displayed.

Note: The contents of the initial screen may differ depending on the settings on your machine.




2.

Enter a PLU number and press the [PLU] key on the keypad.

Note: If "ZERO" is not indicated on the screen, press [→0←] on the keypad.

EXAMPLE

PLU No.27

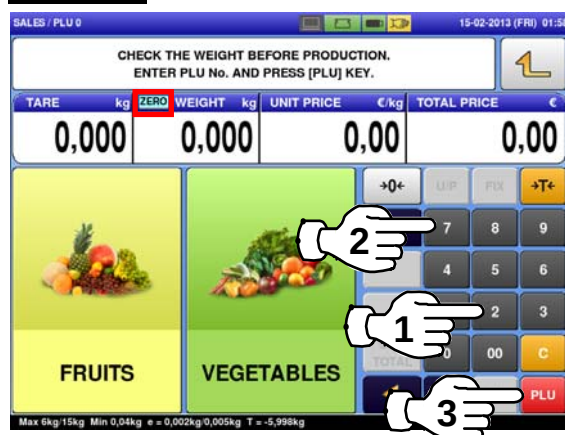


OR

Press a preset product department key to display the associated screen.

EXAMPLE
department


"VEGETABLES"

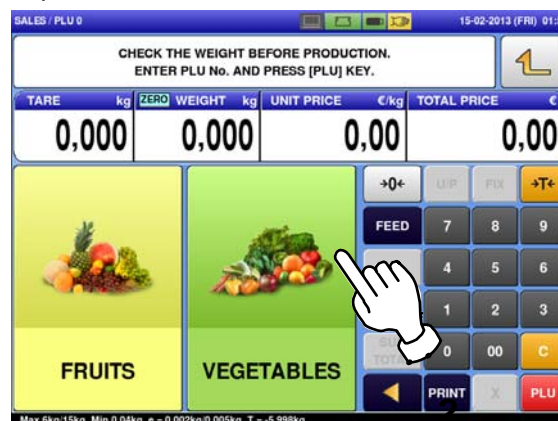

Press the preset PLU key where the product is assigned.

EXAMPLE



"BROCCOLI" (non-weighting product)

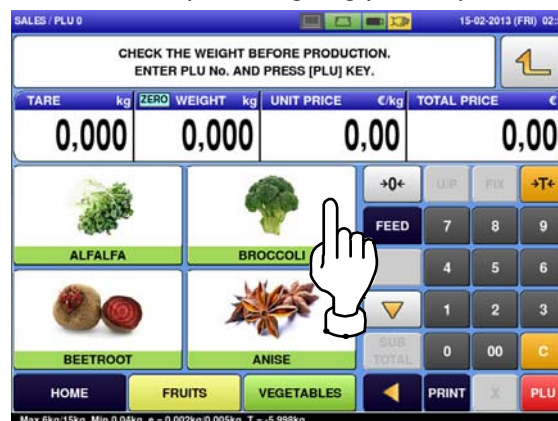


3. The designated non-weighing PLU screen is displayed.



4. Enter the fixed weight and press the “FIXED WEIGHT” field.

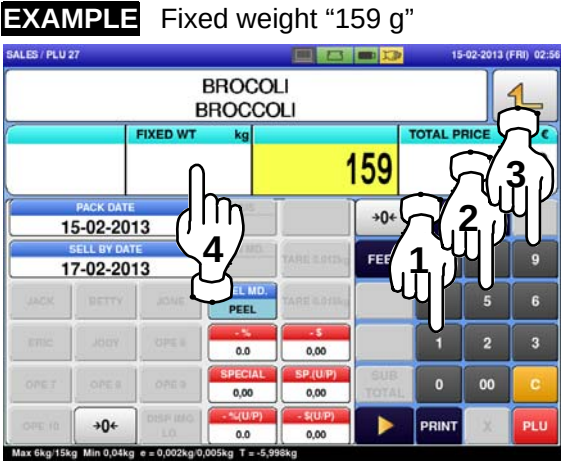

Non-traceable products



Traceable products

Note: To stop printing, press the [PRINT] key again.

2.3.5 ISSUING LABELS REQUIRING OPERATOR REGISTRATION


1.

Press the "SALES" icon on the operation menu selection screen.



The initial screen is displayed.

Note: The contents of the initial screen may differ depending on the settings on your machine.

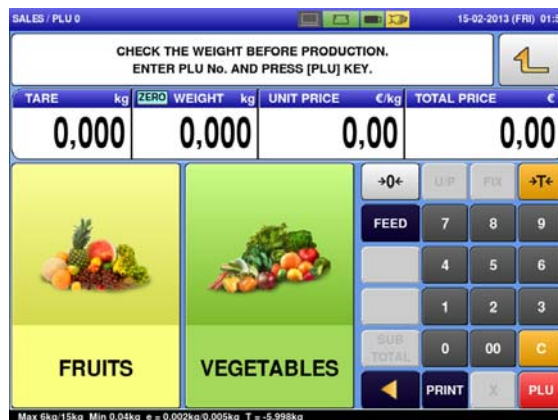


2.

Enter a PLU number and press the [PLU] key on the keypad.

Note: If "ZERO" is not indicated on the screen, press [→0←] on the keypad.

EXAMPLE PLU No.3

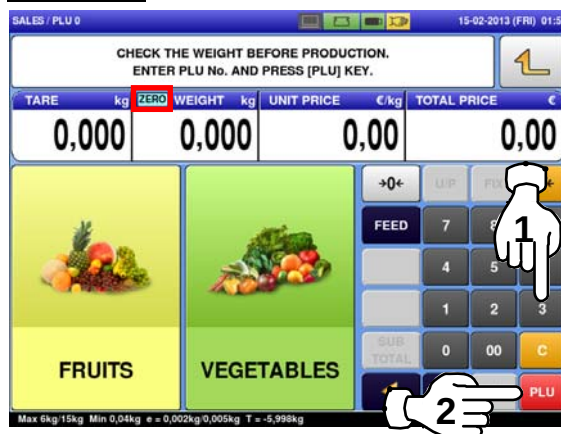

OR


Press a preset product department key to display the associated screen.

EXAMPLE "FRUITS" department



Press the preset PLU key where the product is assigned.

EXAMPLE "Red Grape" (weighing product)

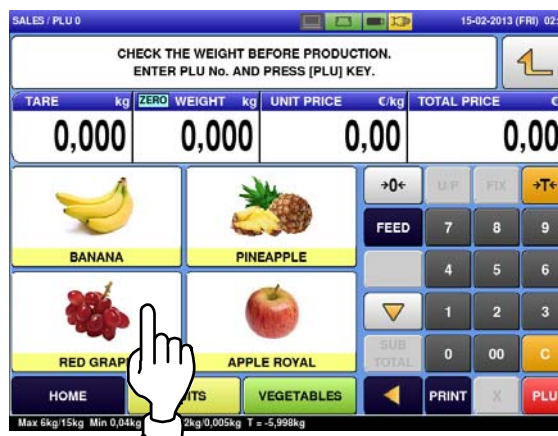

3. The designated PLU screen is displayed.

EXAMPLE

A product to which its unit price and tare weight were set beforehand.

PT	kg	NET WT	kg	UNIT PRICE	€/kg	TOTAL PRICE	€
0,050		-0,050		3,45		0,00	

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg

- 4.

Put the product on the weighing platter.

PRODUCT



The product is weighed and its total price is calculated.

PT	kg	NET WT	kg	UNIT PRICE	€/kg	TOTAL PRICE	€
0,050		0,350		3,45		1,21	

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg

5. Press an operator button to issue a label.

EXAMPLE Operator "BETTY"

PT	kg	NET WT	kg	UNIT PRICE	€/kg	TOTAL PRICE	€
0,050		0,350		3,45		1,21	

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,998kg



Non-traceable products




Traceable products

2.3.6 ISSUING RECEIPTS BY THE SAME OPERATOR

1.

Ensure that the “Operator Selection” screen is displayed.
Then, press an operator button for selection.

EXAMPLE Operator “BETTY”

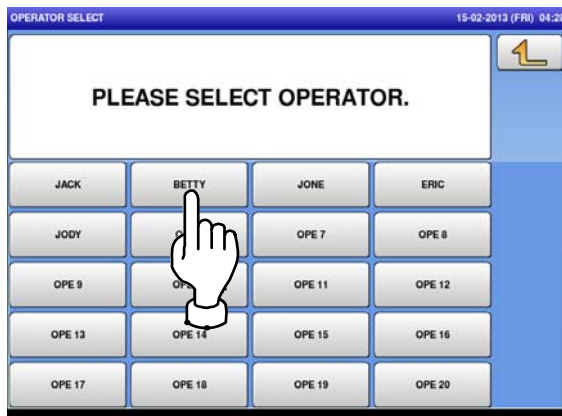

The initial screen is displayed.

Note: The contents of the initial screen may differ depending on the settings on your machine.




2.

Enter a PLU number and press the [PLU] key on the keypad.

Note: If “ZERO” is not indicated on the screen, press [→0←] on the keypad.

EXAMPLE PLU No.3

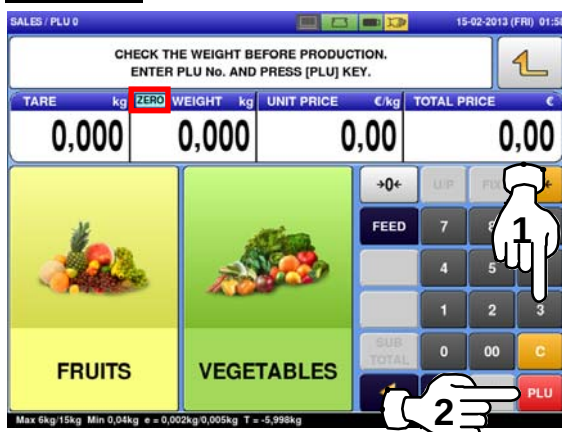

OR


Press a preset product department key to display the associated screen.

EXAMPLE “FRUITS” department



Press a preset PLU key where the product is assigned.

EXAMPLE “Red Grape” (weighing product)

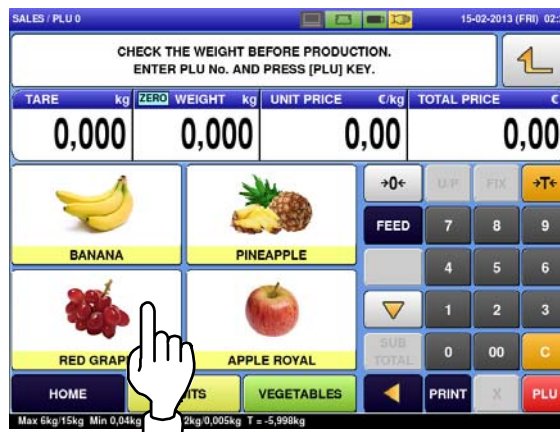

3. The designated weighing PLU screen is displayed.



Put the product on the weighing platter.

PRODUCT



4. Press the [SUB TOTAL] key to complete the registration.



The subtotal screen for the designated operator appears on the screen.




5. Select a product department by pressing the corresponding field.

EXAMPLE "FRUITS" department




6. The PLU preset key screen associated to the designated department is displayed. Then, press the preset PLU key where the product is assigned.


EXAMPLE "APPLE ROYAL" (fixed price product)

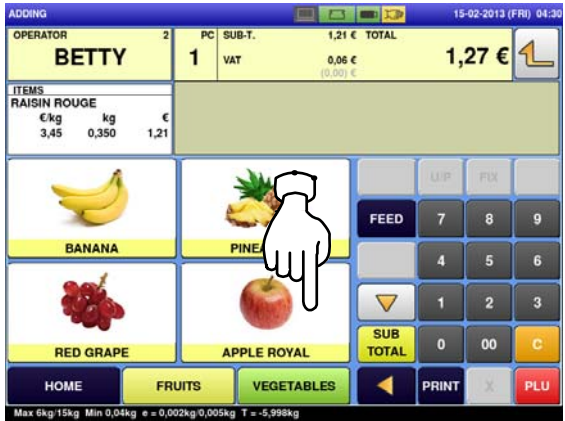

7. Press [▶] to complete the registration.

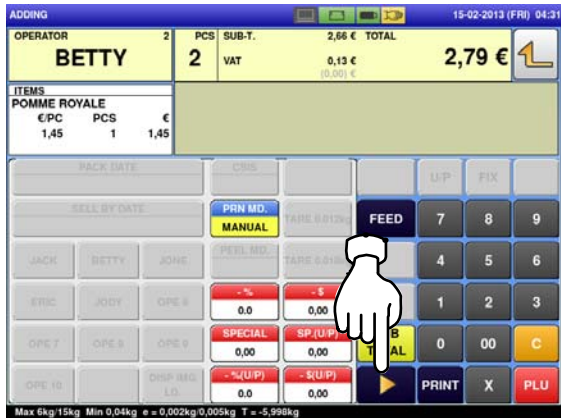

8. Select a product department by pressing the corresponding field on the screen.
EXAMPLE "VEGETABLES" department.

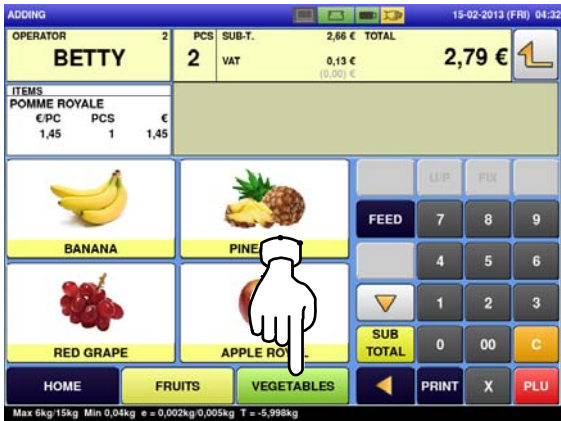


9.

The PLU preset key screen associated to the designated department is displayed.
Then, press the preset PLU key where the product is assigned.

EXAMPLE

"ANISE" (weighing product)

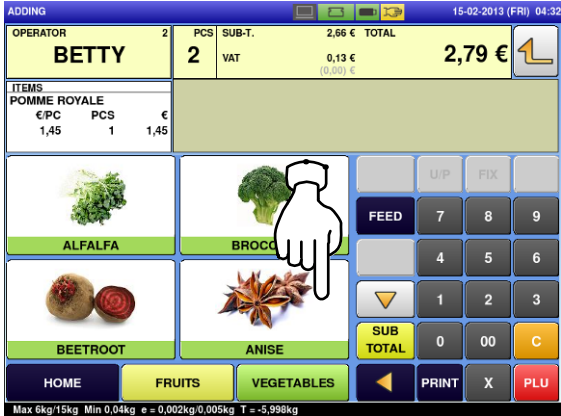

The PLU screen is displayed.



10.

Put the product on the weighing platter.

PRODUCT




11. Press the [SUB TOTAL] button.



The subtotal screen for the designated operator is displayed.




12. Select a product department by pressing the corresponding field on the screen.
EXAMPLE "VEGETABLES" department.

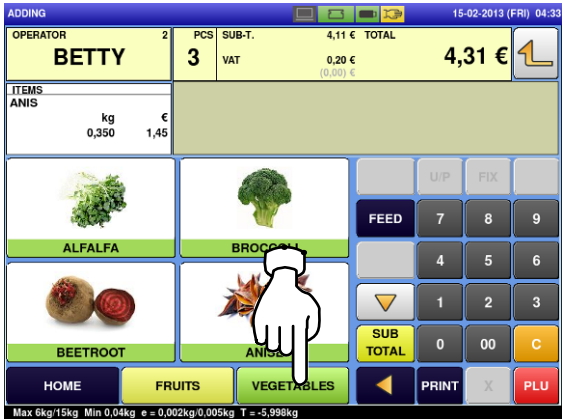

13. The PLU preset key screen associated to the designated department is displayed. Then, press the preset PLU key where the product is assigned.

EXAMPLE "BROCCOLI" (fixed unit price product)

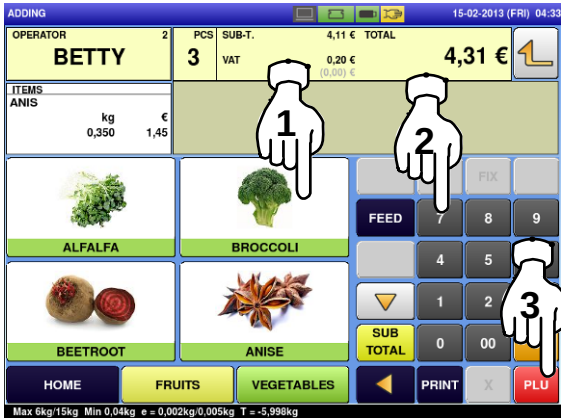


The designated PLU screen is displayed.



14. Enter the weight, and press the "Fixed Weight" field on the screen.


EXAMPLE Weight "159g"

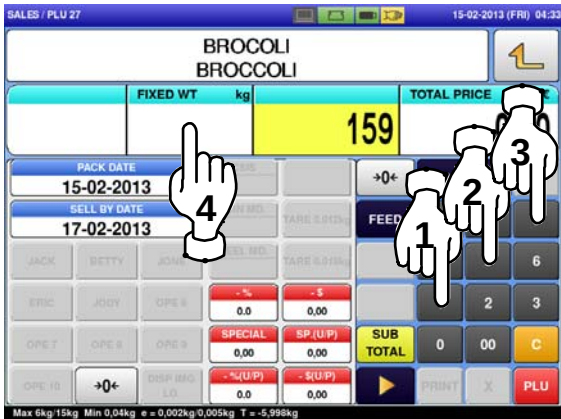


15. Press the [SUB TOTAL] button.



➡ The subtotal screen is displayed.

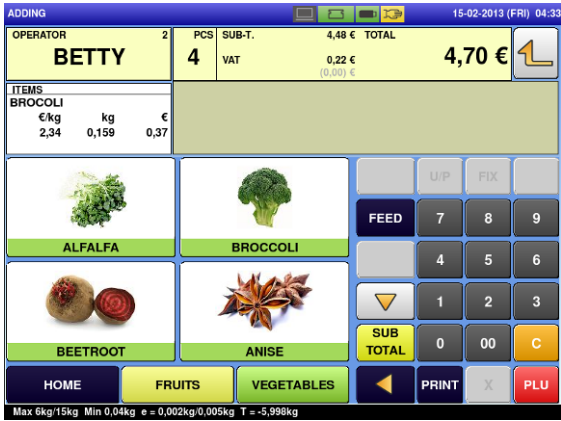

16. Press the operator field to display more detailed subtotal data.

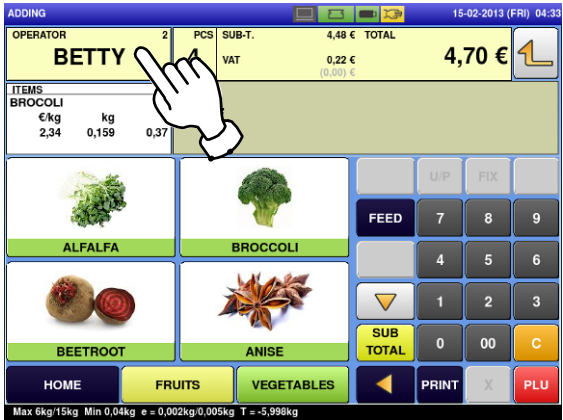

17. The detailed subtotal screen is displayed. Then, confirm that the details of the displayed transaction are correct.



18.

Press the [PRINT] key to issue a receipt.



The subtotal screen is displayed.

SUB/TOTAL
15-02-2012 (FRI) 04:3

OPERATOR	2	PCS	SUB-T.	4,48 € + 0,22 €	TOTAL	4,70 €
BETTY	FID.PNTS. OPNT(5)	4	VAT	0,22 € (0,02) €		

ITEM LIST	CASH	TENDERED
RAISIN ROUGEGRAPPE	0,00 €	0,00 €
€kg kg	COUPON 0,00 €	
3,45 0,350 1,21	CREDIT 0,00 €	CHANGE
	O.THAN 0,00 €	0,00 €

POMME ROYALEAPPLE	€/PC PCS	1,45 1	1,45
ANISANISE	kg	0,350	1,45
BROCOLIBROCCOLI	€/kg kg	0,159	0,37


VOID	RECEIPT DELETE	LIP	FOX
TAX PRINT	RECEIPT	OPEN DRAWER	FEED
NO-PRN	PRINT	SUB TTL %	7 8 9
-5%	-7%	0,0	4 5 6
SUB TTL €	0,00	1 2 3	
-50 \$	-100 \$	-200 \$	0 00 C
CREDIT	O. THAN CASH	COUNT	PRINT X PLU

Max 6kg/15kg Min 0,04kg e = 0,002kg/0,005kg T = -5,9%

SUB-TOTAL 15-02-2013 (FRI) 04:28

OPERATOR	2	PCS	SUB-T.	4.48 €	TOTAL	
BETTY		4	VAT	0.22 €	4,70 €	1
FID.PNTS.	QPNT(5)			(0.00) €		
ITEM LIST			CASH	4,70 €	TENDERED	
RAISIN ROUGEGRPE			COUPON	0,00 €	4,70 €	
€/kg kg			CREDIT	0,00 €	CHANGE	
3,45 0,350 1,21			O.THAN	0,00 €	0,00 €	
POMME ROYALEAPPLE						
€/PC PCS						
1,45 1 1,45						
ANISANISE						
kg						
0,350 1,45						
BROCOLIBROCCOLI						
€/kg kg						
2,34 0,159 0,37						

Max 6kg 15kg Min 0,04kg e = 0,002kg 0,005kg T = -5,998kg



*** RECEIPT FOR PURCHASE ***
ISHIDA JAPAN
<http://www.ishida.co.jp/>
28-02-2013 13:20 0002 BETTY

PLU	€/kg	kg	€
RAISIN ROUGE			
3	3.45	0.350	1.21
FIDELITY POINT:		0 POINT(S)	

PLU	€/Pcs	Pcs	€
POMME ROYALE			
APPLE ROYAL			
4	1.45	1	1.45
FIDELITY POINT:		0 POINT(S)	

PLU	€/kg	kg	€
ANIS			
ANISE			
29	4.14	0.350	1.45
FIDELITY POINT:		0 POINT(S)	

PLU	€/kg	kg	€
BROCOLI			
BROCCOLI			
27	2.34	0.159	0.37
FIDELITY POINT:		0 POINT(S)	

4 items TOTAL PCS: 4

Sub-total: 4.48

TOTAL VAT : 0.22
 ROUNDING : 0.00

Total: €4.70

CASH : €4.70
 TENDERED: €4.70

TOTAL FIDELITY POINT: 0 POINT
 BETTY


28-02-2013 13:22 No. 0008 MACHINE 01


 0 200000 704704
 Welcome again.

Thank You


2.3.7 ISSUING RECEIPTS BY DIFFERENT OPERATORS

1. Ensure that the initial screen is displayed.
Note: The contents of the initial screen may differ depending on the settings on your machine.

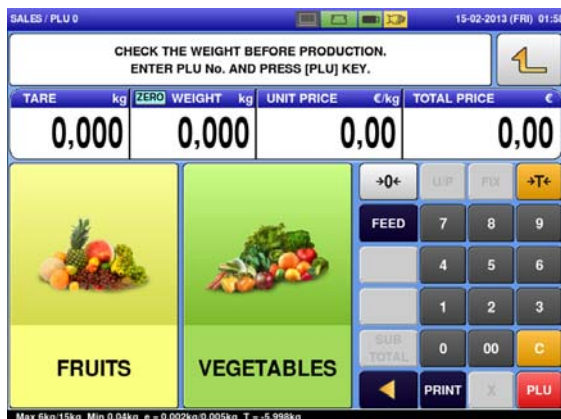

2. Enter a PLU number and press the [PLU] key on the keypad.

Note: If "ZERO" is not indicated on the screen, press [→0←] on the keypad.

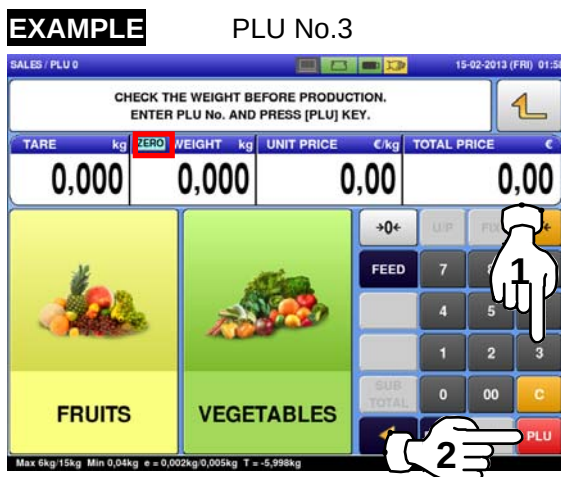

OR Press a preset product department key to display the associated screen.

EXAMPLE


"FRUITS"



Then, press the preset PLU key where the product is assigned.

EXAMPLE

"Red Grape" (weighing product)

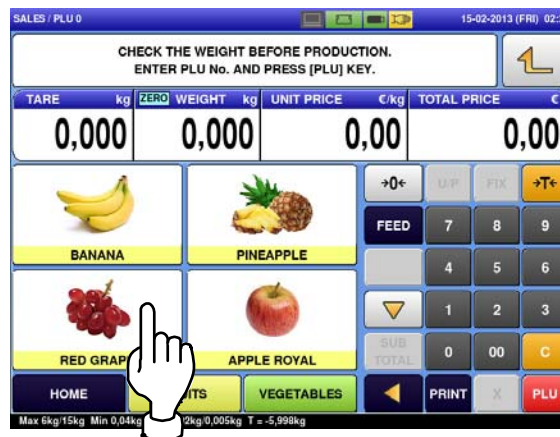

3. The designated PLU screen is displayed.



4. Put the product on the weighing platter.



5. Press an operator button.
EXAMPLE Operator "BETTY"



➔ The subtotal screen for the designated operator is displayed.



6. Select a product department by pressing the corresponding field on the screen.

EXAMPLE "FRUITS" department.



7. The PLU preset screen associated to the designated department is displayed. Then, press the preset PLU key where the product is assigned.

EXAMPLE "APPLE ROYAL" (fixed price product)



➔ The designated PLU screen is displayed.



8.

Press an operator button.

EXAMPLE

Operator "BETTY"



➔ The subtotal screen for the designated operator is displayed.



9.


Now, the operator has changed from "BETTY" to "JACK".

Select a product department by pressing the corresponding field on the screen.

EXAMPLE

"VEGETABLES"

department

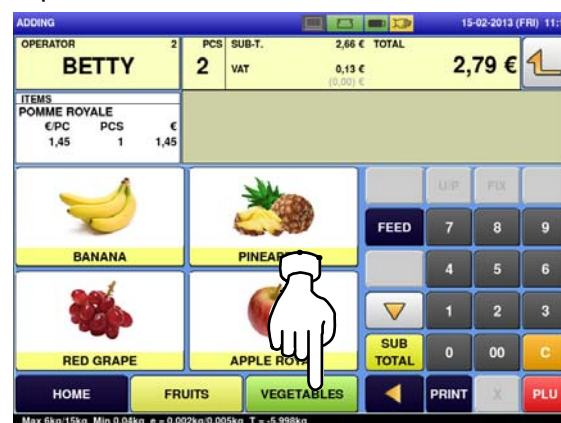


10.

The PLU preset screen associated to the designated department is displayed. Then, press the preset PLU key where the product is assigned.

EXAMPLE

"ANISE" (weighing product)

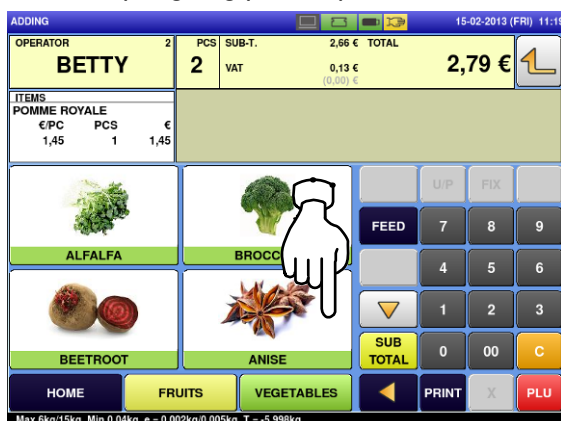

The designated PLU screen is displayed.



11. Put the product on the weighing platter.

PRODUCT



Press an operator button.

EXAMPLE

Operator "JACK"



The subtotal screen for the designated operator is displayed.



12.

Now, "BETTY" is back again. Select a product department by pressing the corresponding field on the screen.

EXAMPLE

"VEGETABLES"

department



13.

The PLU preset screen associated to the designated department is displayed. Then, press the preset PLU key where the product is assigned.

EXAMPLE


"BROCCOLI" (fixed unit price product)




The designated PLU screen is displayed.




14. Enter the weight value, and press the “Fixed Weight” field.

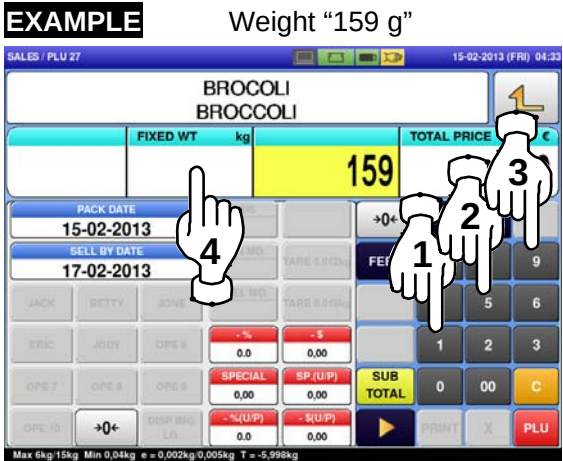

The subtotal screen for the designated operator is displayed.

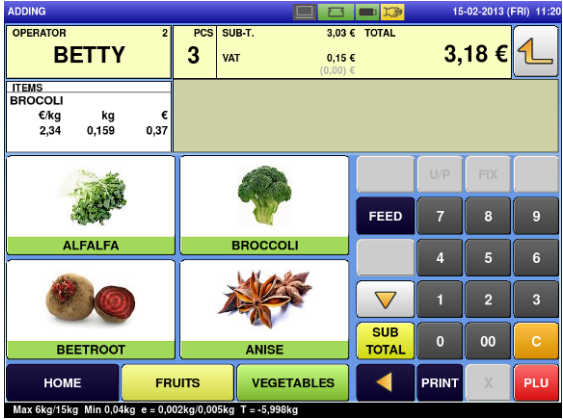

17. The detailed subtotal screen is displayed. Then, confirm that the details of the transaction are correct.

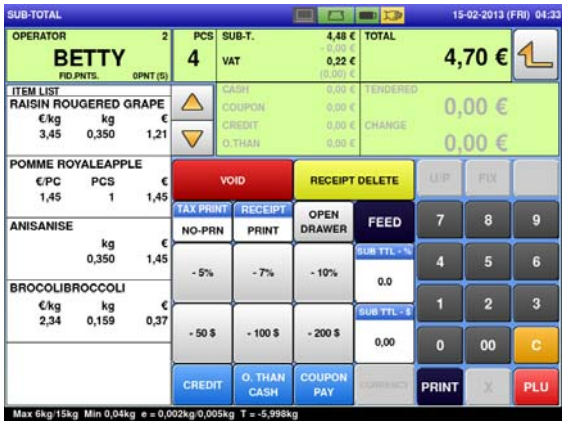


16. Press an operator button.

EXAMPLE Operator “BETTY”



16. Press the operator field to display more detailed subtotal data.

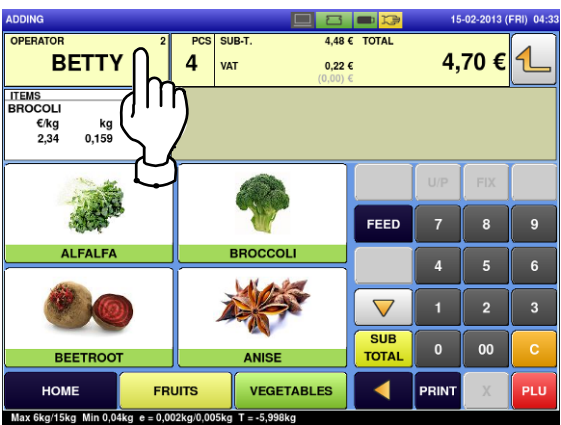

18. Press the [PRINT] key to issue a receipt.

➡ The subtotal screen is displayed.

SUB-TOTAL				15-02-2013 (FRI) 04:33		
OPERATOR	BETTY	PCS	4	SUB-T.	4,48 €	
			VAT	0,22 €	TOTAL	4,70 €
ITEM LIST						
RAISIN ROUGERED GRAPE		€kg	kg	€		
3,45 0,350 1,21						
POMME ROYALEAPPLE		€PC	PCS	€		
1,45 1 1,45						
ANISANISE		€kg	kg	€		
0,350 1,45						
BROCOLIBROCCOLI		€kg	kg	€		
2,34 0,159 0,37						
VOID RECEIPT DELETE U/P FUX						
TAX PRINT RECEIPT OPEN DRAWER FEED						
- 5% - 7% - 10% 0,0						
- 50 \$ - 100 \$ - 200 \$ 0,00						
CREDIT O. THAN CASH COUPON PAY CURRENCY PRINT X PLU						

SUB-TOTAL				15-02-2013 (FRI) 04:34		
OPERATOR	BETTY	PCS	4	SUB-T.	4,48 €	
			VAT	0,22 €	TOTAL	4,70 €
ITEM LIST						
RAISIN ROUGERED GRAPE		€kg	kg	€		
3,45 0,350 1,21						
POMME ROYALEAPPLE		€PC	PCS	€		
1,45 1 1,45						
ANISANISE		€kg	kg	€		
0,350 1,45						
BROCOLIBROCCOLI		€kg	kg	€		
2,34 0,159 0,37						
VOID RECEIPT DELETE U/P FUX						
TAX PRINT RECEIPT OPEN DRAWER FEED						
- 5% - 7% - 10% 0,0						
- 50 \$ - 100 \$ - 200 \$ 0,00						
CREDIT O. THAN CASH COUPON PAY CURRENCY PRINT X PLU						

MEMBER SAVINGS

✕ RECEIPT FOR PURCHASE ✕

ISHIDA JAPAN

http://www.ishida.co.jp/

28-02-2013 13:20 0002 BETTY

PLU	€/kg	kg	€
RAISIN ROUGE			
RED GRAPE			
3	3.45	0.350	1.21
FIDELITY POINT:		OPOINT(S)	

PLU	€/Pcs	Pcs	€
POMME ROYALE			
APPLE ROYAL			
4	1.45	1	1.45
FIDELITY POINT:		OPOINT(S)	

PLU	€/kg	kg	€
ANIS			
ANISE			
29	4.14	0.350	1.45
FIDELITY POINT:		OPOINT(S)	

PLU	€/kg	kg	€
BROCOLI			
BROCCOLI			
27	2.34	0.159	0.37
FIDELITY POINT:		OPOINT(S)	

4 items

TOTAL PCS: 4

Sub-total1: 4.48

TOTAL VAT :

0.22

ROUNDING :

0.00

Total1:

€4.70

CASH :

€4.70

TENDERED:

€4.70

TOTAL FIDELITY POINT:

0 POINT

BETTY

28-02-2013 13:22

No. 0008

MACHINE 01


0 200000 704704

Welcome again.

Thank You

2.3.8 VOIDING PRODUCT REGISTRATIONS


1. To void a product registration that has been made in the transaction, display the "Sub-Total" screen.

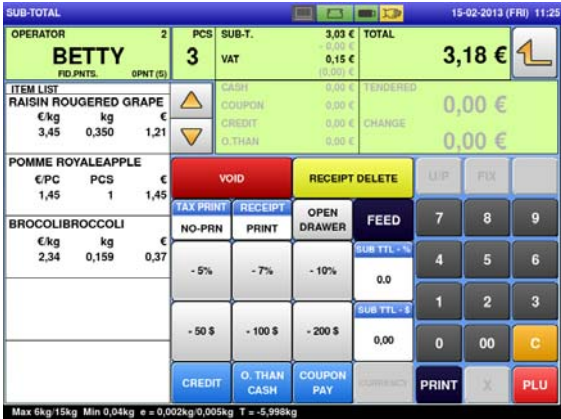

2. Press the field of a product registration to be voided, and then press the [VOID] button.

EXAMPLE
registration


Voiding the third

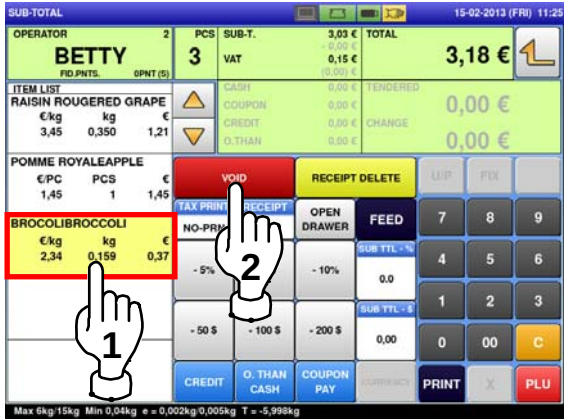

3. The confirmation screen is displayed. Then, press [EXEC] to continue, or [STOP] to go back.





➡ **Note:** To scroll the selection up or down, press the [▲] or [▼] keys.
The designated product registration has been voided.

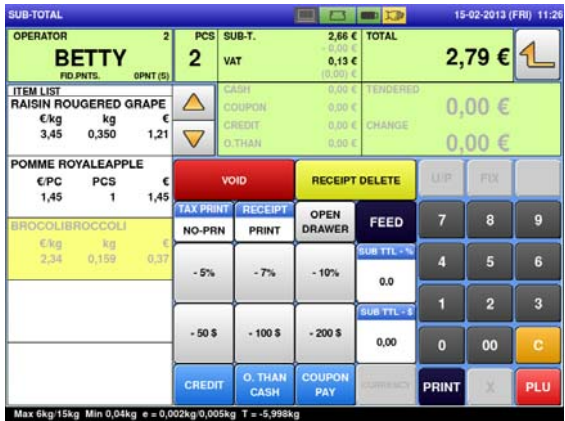

4. Press the [PRINT] key to issue a receipt.

➡ The subtotal screen is displayed.

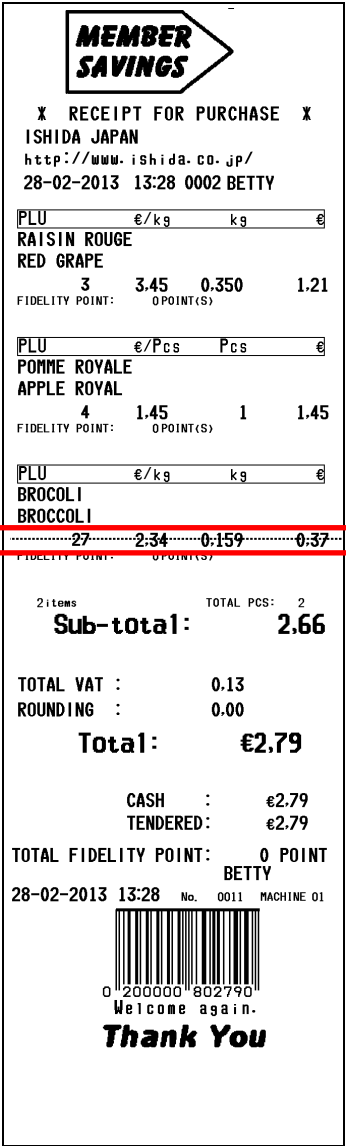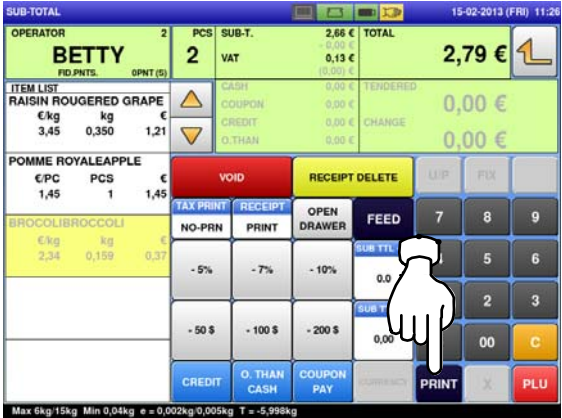

Deleted by a dashed line

2.3.9 ENTERING OR OVERWRITING TARE WEIGHTS


1. Ensure that the designated PLU screen is displayed.



2. Enter a numerical value and press the [→T←] (Tare) key.

EXAMPLE

Tare weight “50 g”

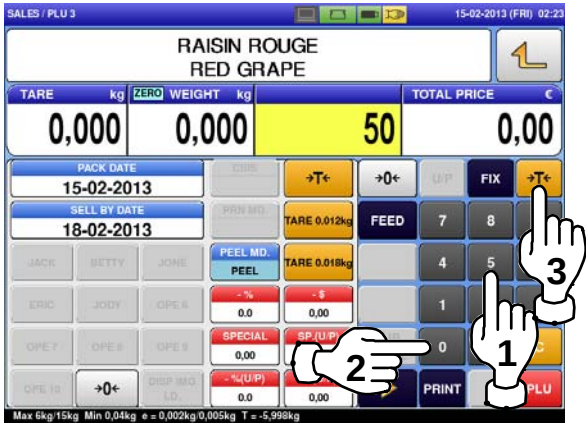

2.3.10 CHANGING UNIT PRICES

1. Ensure that the designated PLU screen is displayed.



2. Enter the unit price and press the “UNIT PRICE” field.

EXAMPLE

“\$1.56”




2.3.11 CHANGING FIXED PRICES

1. Ensure that the designated PLU screen is displayed.
2. Enter the price, and press the “FIXED PRICE” field.



EXAMPLE “\$1.56”

Fixed Price Products

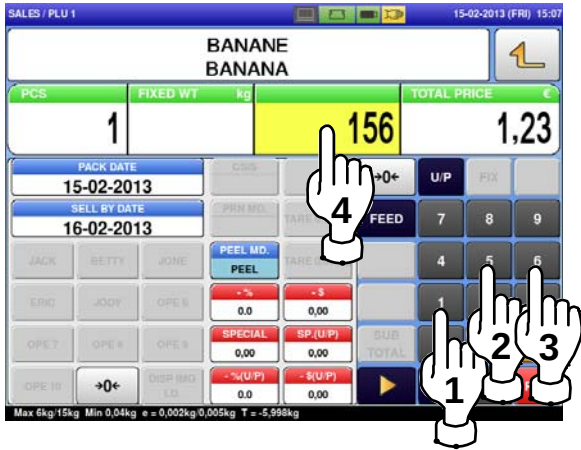


2.3.12 DISCOUNTING UNIT PRICES BY AMOUNT

1. Ensure that the designated PLU screen is displayed.
2. Enter the amount to be discounted, and press the “-\$ (U/P)” field.



EXAMPLE Discount amount “\$0.50”.

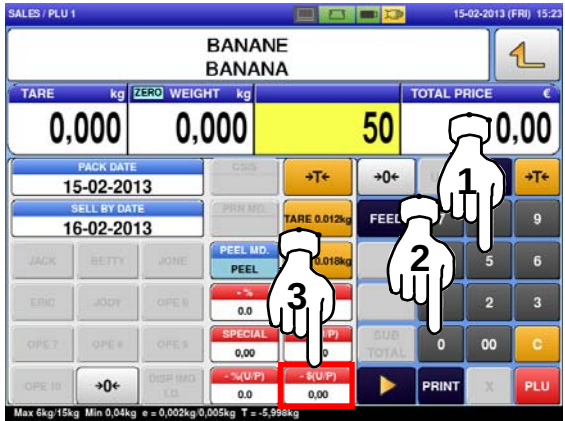

2.3.13 DISCOUNTING UNIT PRICES BY PERCENTAGE

1. Ensure that the designated PLU screen is displayed.
2. Enter the discount percentage, and press the “-% (U/P)” field.



EXAMPLE Discount percentage “10%”.




2.3.14 DISCOUNTING TOTAL PRICES BY AMOUNT

1. Ensure that the designated PLU screen is displayed.
2. Enter a discount amount using the numeric keys, and press the “-\$” field.



EXAMPLE Discount amount “\$0.50”.

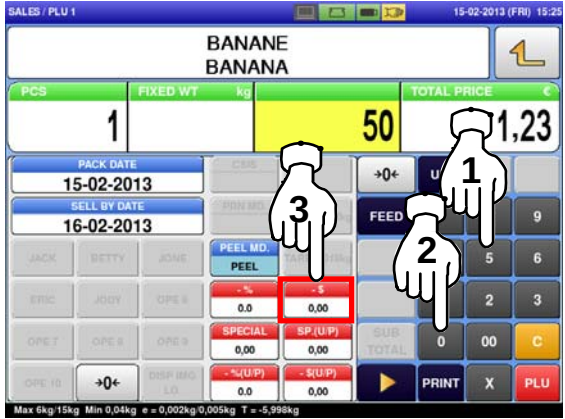

2.3.15 DISCOUNTING TOTAL PRICES BY PERCENTAGE

1. Ensure that the designated PLU screen is displayed.
2. Enter the discount percentage, and press the “-%” field.



EXAMPLE

Discount percentage

“10%”.



2.3.16 CHANGING QUANTITIES

1. Ensure that the designated price PLU screen is displayed.
2. Enter the quantity and press the [X] key.



EXAMPLE

Quantity “3 pieces”





2.3.17 SPECIFYING THE NUMBER OF LABELS

1. Ensure that the designated PLU screen is displayed, and confirm that “AUTO” is selected in the “Print Mode” field.
2. Enter the number of labels to be printed and press the [PRINT] key to print labels. .



EXAMPLE


“3 labels”

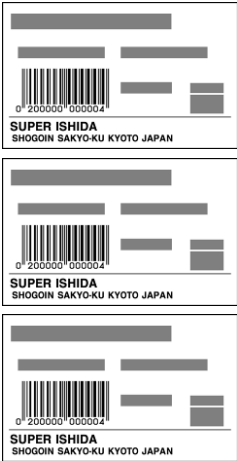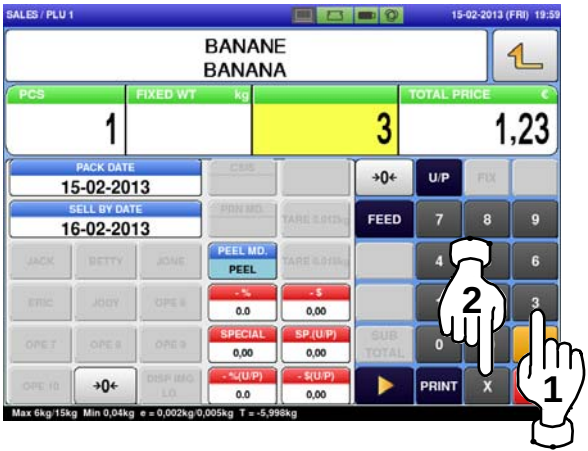

Note:
To interrupt the issue of labels, press the [PRINT] key again.
To restart the issue of labels, press the [PRINT] key again.

2.3.18 SELF-SERVICE OPERATIONS FOR WEIGHING PRODUCTS


1. Ensure that the initial screen for self-service operations is displayed.

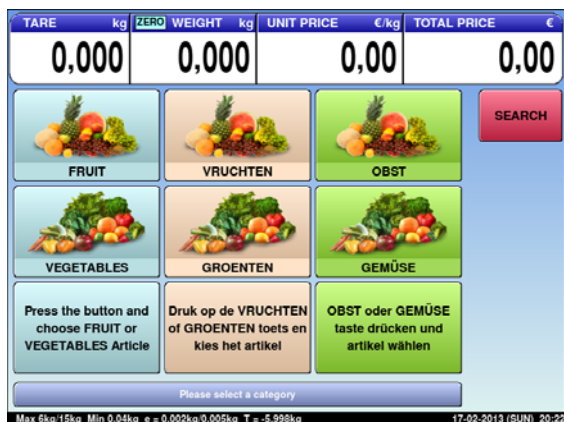


2. Select a product by pressing the corresponding field on the screen.

EXAMPLE

"Red Grape" (weighing product)

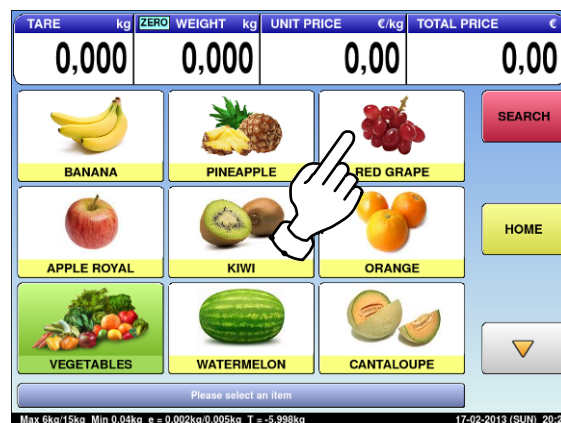

3. The designated product image is displayed.

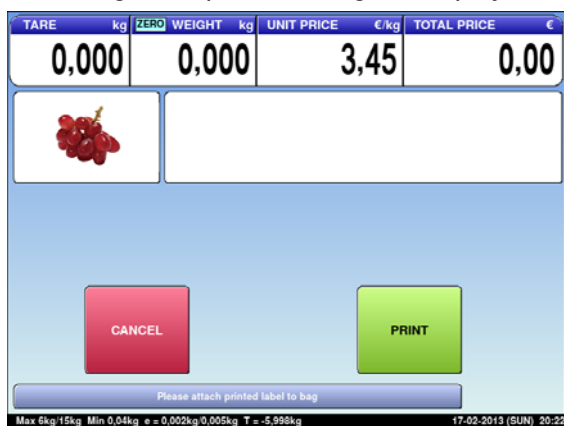


- 4.

Put the product on the weighing platter.


PRODUCT



The product is weighed and its total price is calculated.

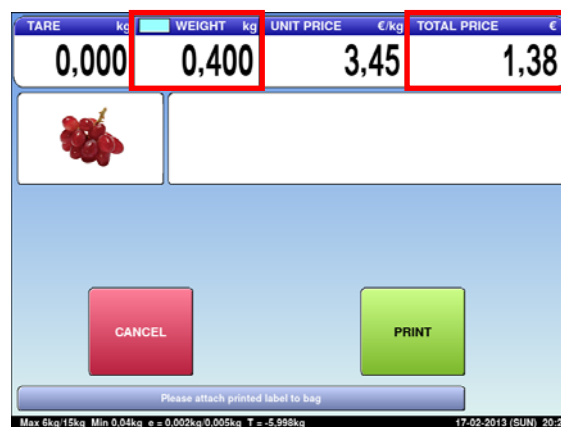


5. Press the [PRINT] button to issue a label.

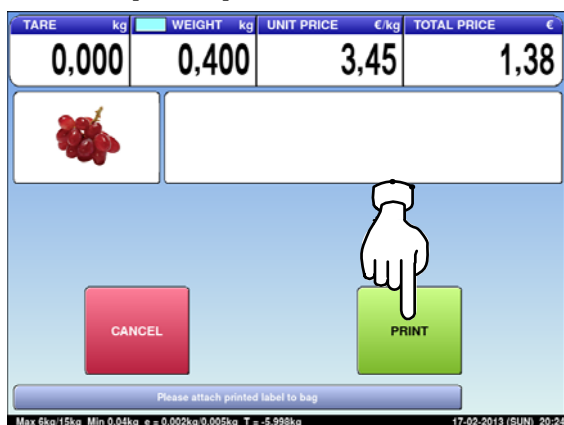


2.3.19 SELF-SERVICE OPERATIONS FOR FIXED PRICE PRODUCTS

1. Ensure that the initial screen for self-service operations is displayed.

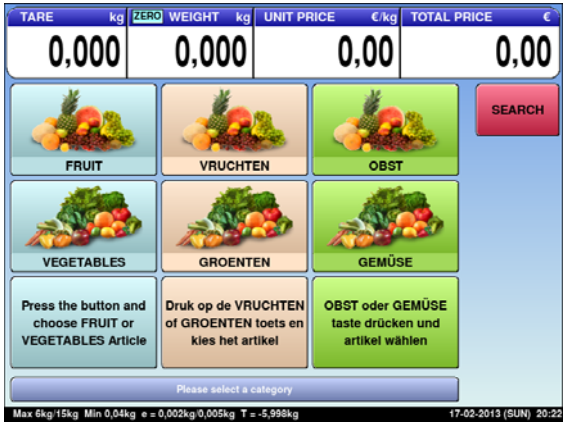



2. Select a product by pressing the corresponding field on the screen.

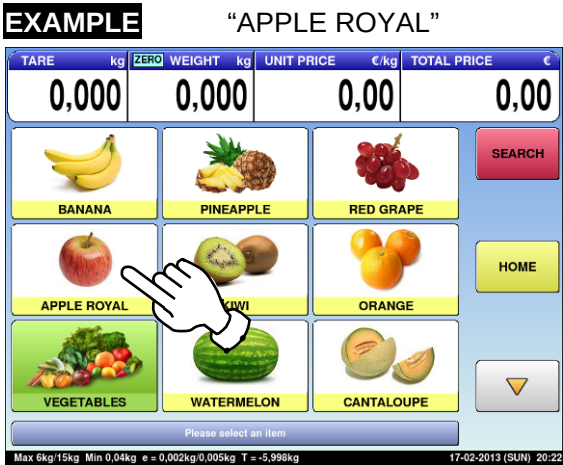

3. The designated product image is displayed.




Enter the quantity and press the [MULTI] key. Then, press the [PRINT] key to issue a label.

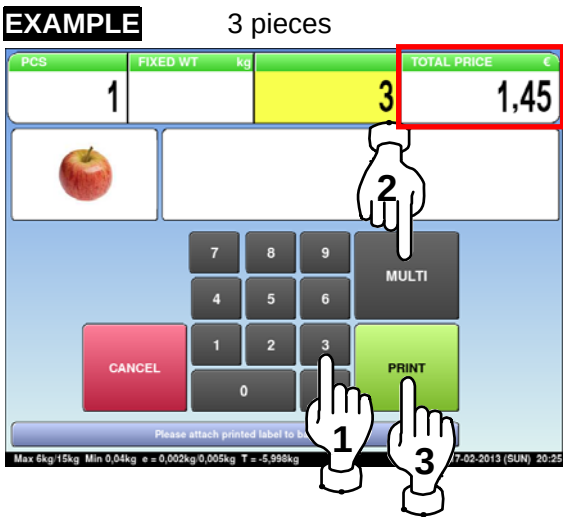


2.3.20 ACCUMULATIONS THROUGH MANUAL ENTRY

1. Ensure that the operation menu selection screen is displayed. Then, press the “ACC (Accumulation)” icon.

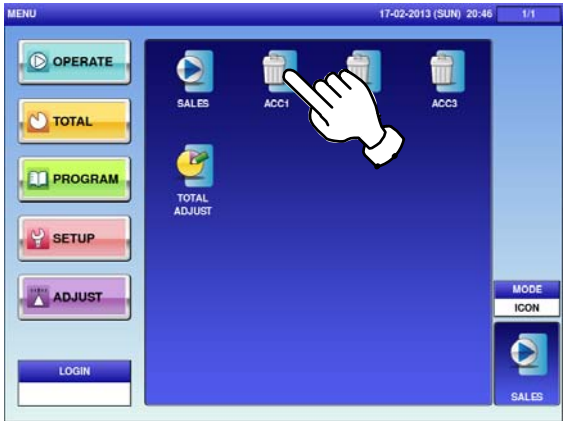


➔ The “Input Numerical Accumulation” screen is displayed.

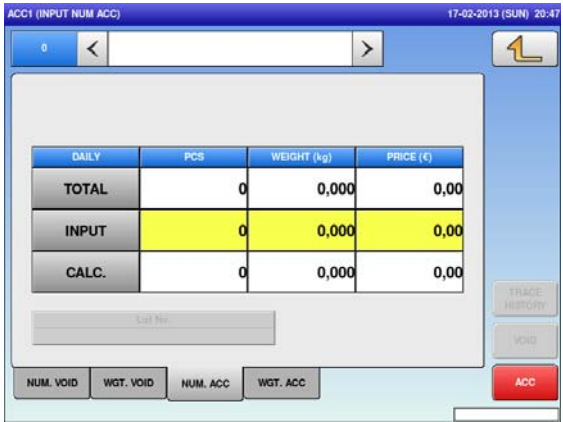


2. Press the input field at the right-bottom of the screen to display the keypad. Then, enter a PLU number and press the [PLU] key on the keypad.

EXAMPLE

PLU No.3

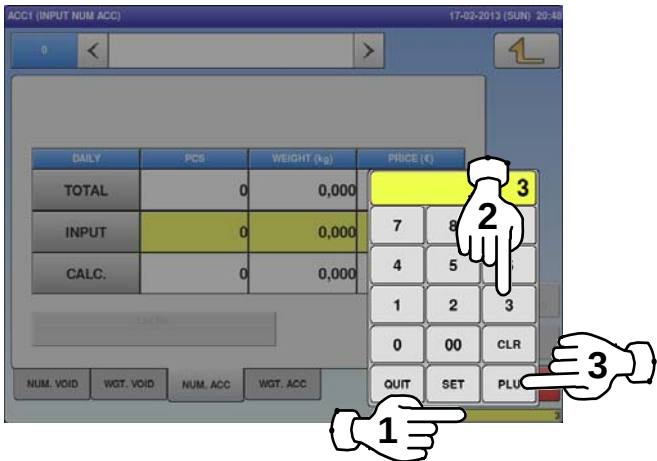

➔ The “Input Numerical Accumulation” screen for the designated product is displayed.

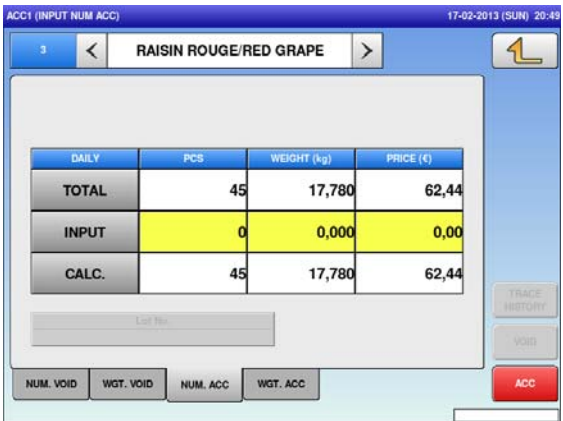



3. Enter the quantity, weight, and price to be accumulated and press the applicable fields. Then, press the [ACC] button on the screen.

EXAMPLE


Quantity “1 pc.”, Weight “400g”, Price “\$1.50”

4. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

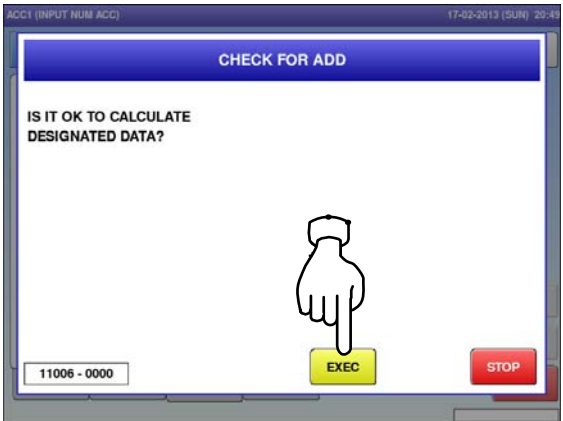

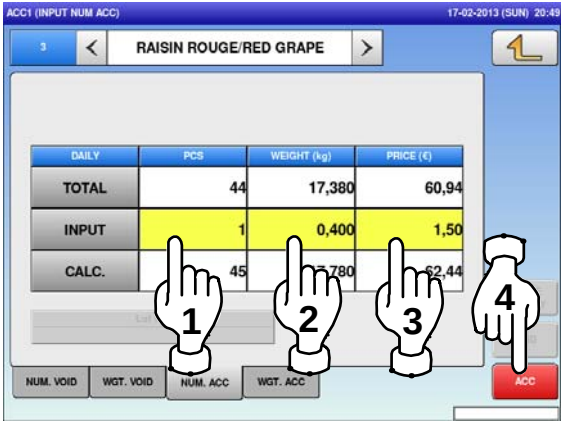

5. The accumulation procedure has been completed.

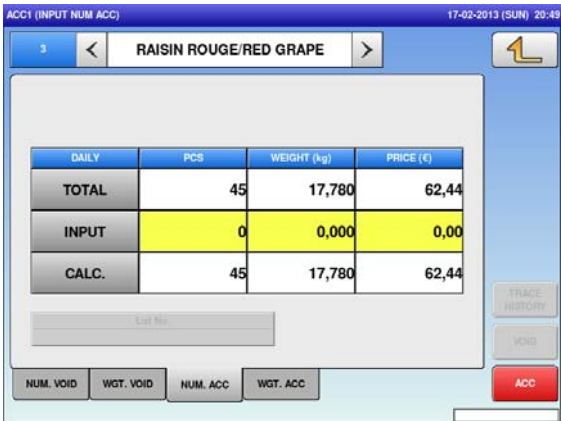

2.3.21 ACCUMULATIONS THROUGH WEIGHING PRODUCTS


1. Ensure that the operation menu selection screen is displayed. Then, press the “ACC (Accumulation)” icon.



- ➔ The “Input Numerical Accumulation” screen is displayed.



2. Press the “WGT. ACC” tab to display the “Weighing Accumulation” screen.

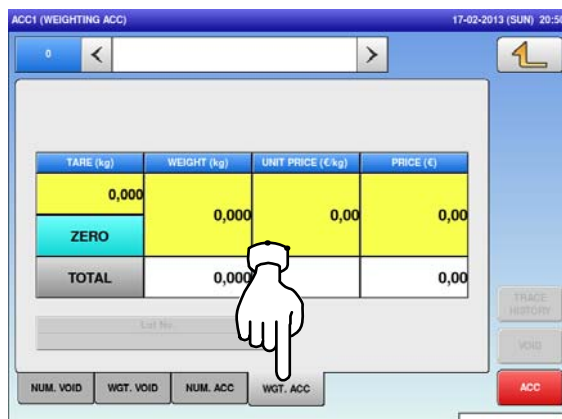


3. Press the input field at the right-bottom of the screen to display the keypad. Then, enter a PLU number and press the [PLU] key on the keypad.

EXAMPLE PLU No.3




- ➔ The Weighing Accumulation screen for the designated product is displayed.

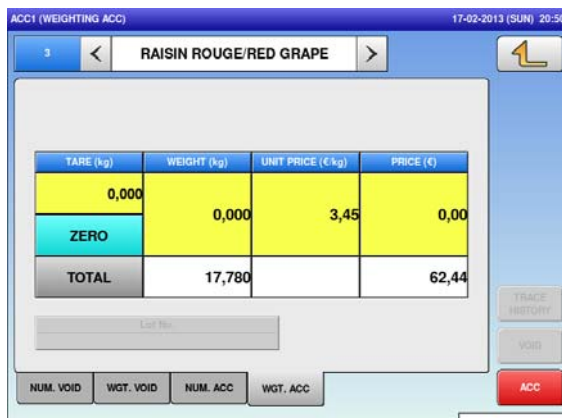


4. Put the product on the weighing platter and press the [ACC] button.

PRODUCT

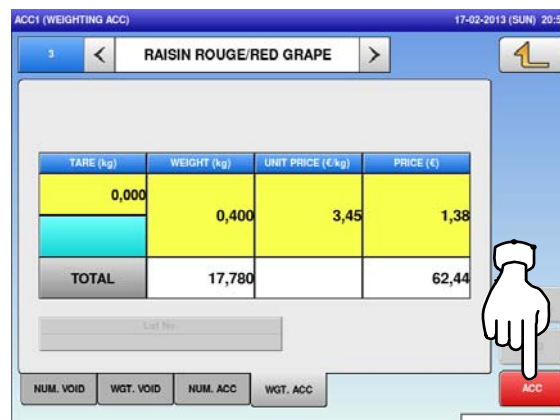

5. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

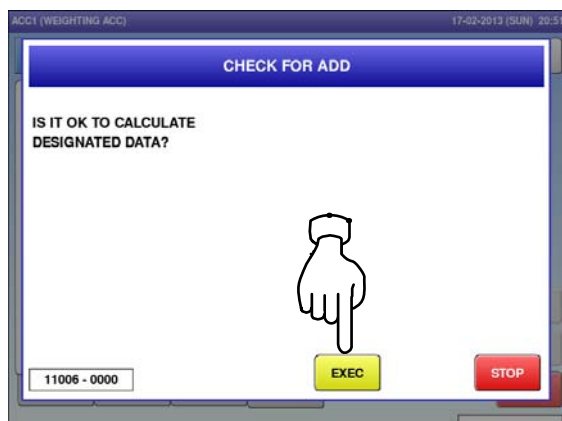

6. Remove the product from the weighing platter. The accumulation procedure has been completed.

PRODUCT



2.3.22 VOIDING REGISTRATIONS THROUGH MANUAL ENTRY


1. Ensure that the operation menu selection screen is displayed. Then, press the “ACC (Accumulation)” icon.




- ➔ The “Input Numerical Accumulation” screen is displayed.



2. Press the “NUM. VOID” tab to display the “Input Number Void” screen.

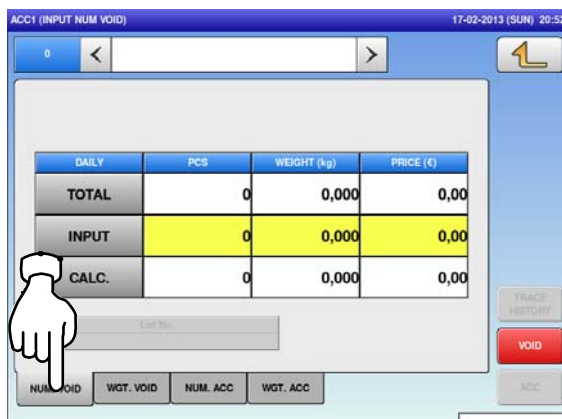

3. Press the input field at the right-bottom of the screen to display the keypad. Then, enter a PLU number and press the [PLU] key on the keypad.

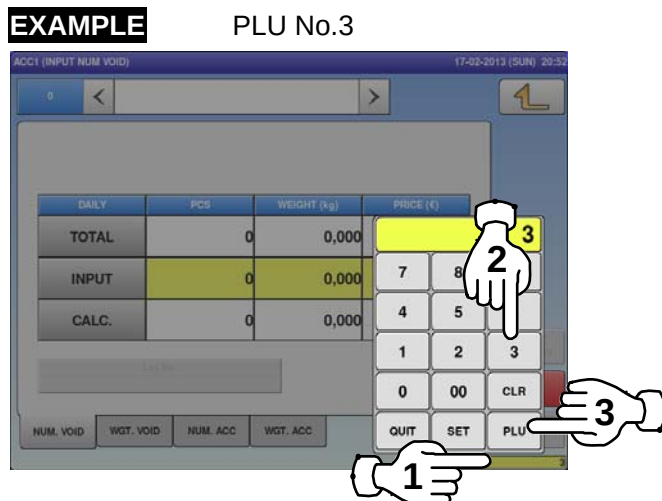


EXAMPLE PLU No.3

- ➔ The “Input Number Void” screen for the selected product is displayed.




4. Enter the quantity, weight, and price to be voided and press the applicable fields. Then, press the [VOID] button.


EXAMPLE
Quantity “1 pc.”, Weight “400g”, Price “\$1.50”

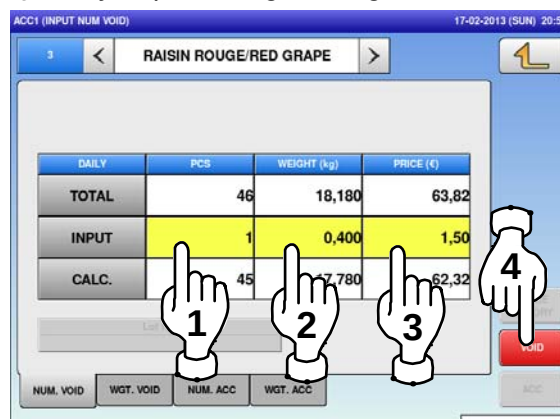

5. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

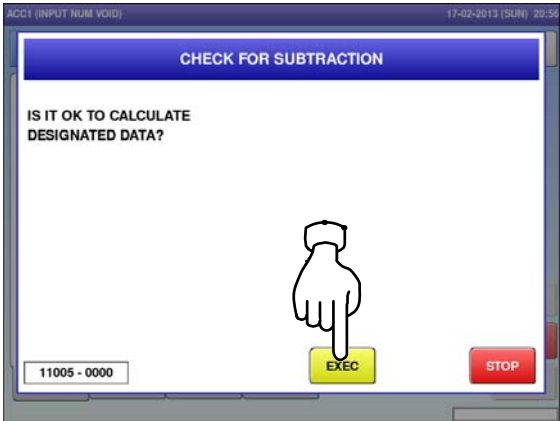

6. The void procedure has been completed.

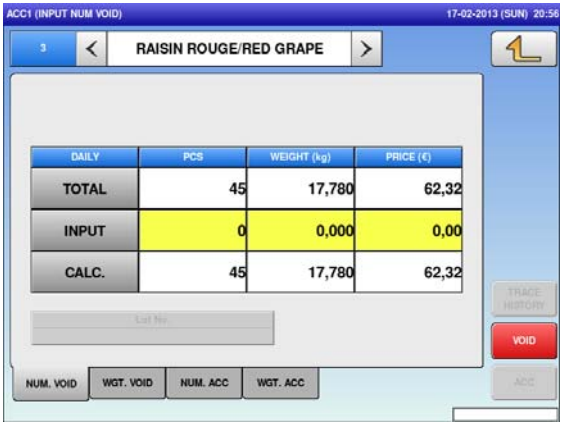

2.3.23 VOIDING THROUGH WEIGHING PRODUCTS

1.

Press the “ACC (Accumulator)” icon.




The “Input Number Accumulation” screen is displayed.



2.

To display the “Weighing Void” screen, press the “WGT. VOID” tab.

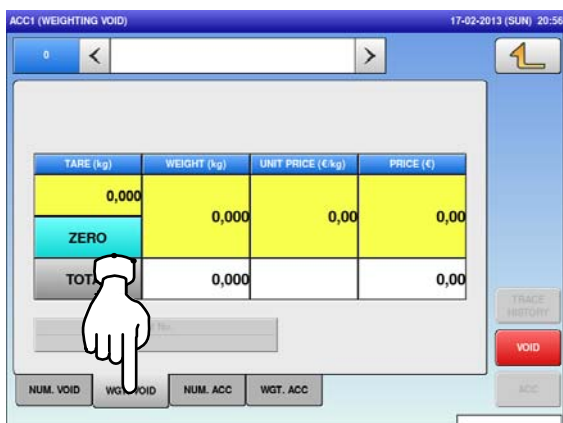


3.


Press the input field at the right-bottom of the screen to display the keypad. Then, enter a PLU number and press the [PLU] key on the keypad.

EXAMPLE

PLU No.3

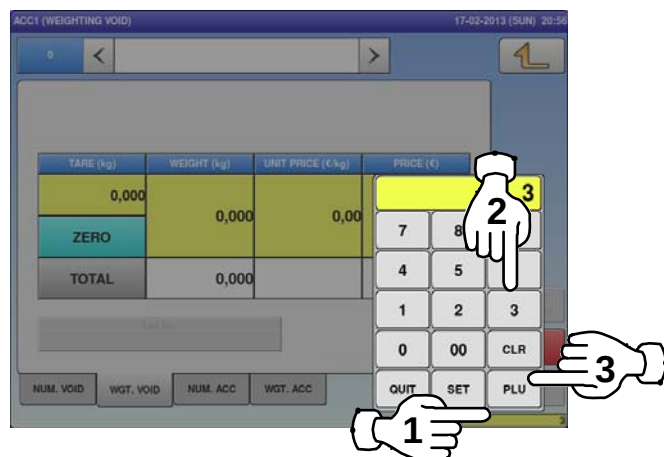


The “Weighing Void” screen for the selected product is displayed.

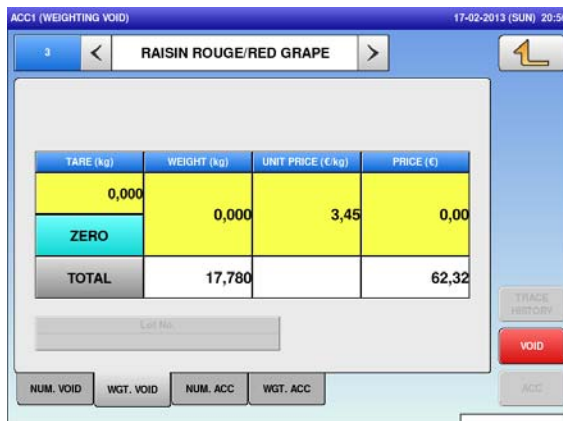


4.


Put the product on the weighing platter and press the [VOID] button on the screen.

PRODUCT




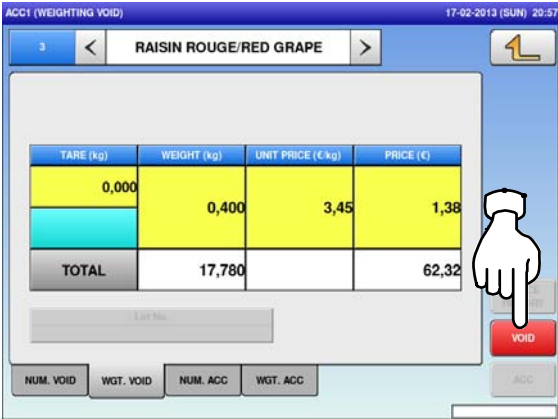

5. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

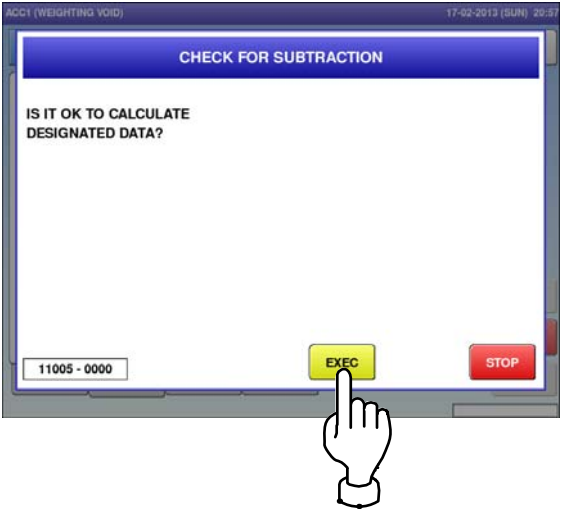


6. Remove the product from the weighing platter. The void procedure has been completed.

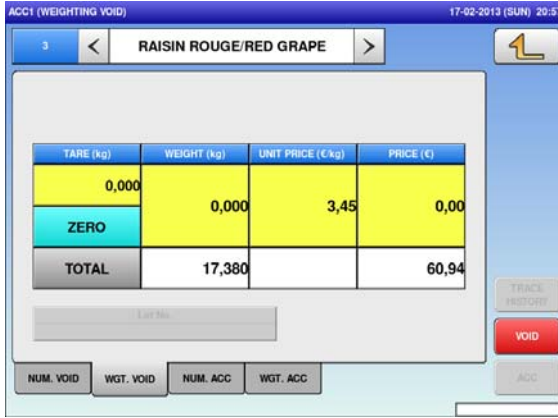


2.3.24 SUBTRACTING TOTALS THROUGH MANUAL ENTRY

1. Press the “TOTAL ADJUST” icon.

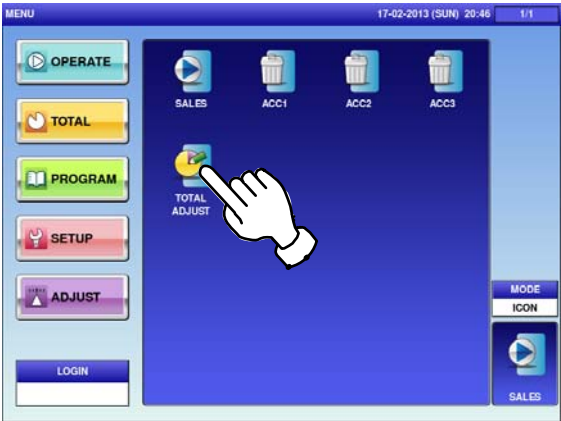

➔ The “Total Adjust (Input Number Subtraction)” screen is displayed.

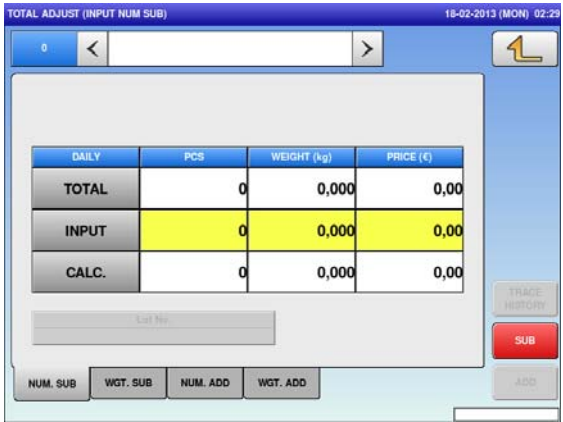


2. Press the input field at the right-bottom of the screen to display the keypad. Then, enter a PLU number and press the [PLU] key on the keypad.

➔ The Total Adjust (Input Number Subtraction) screen for the selected product is displayed.



EXAMPLE PLU No.3


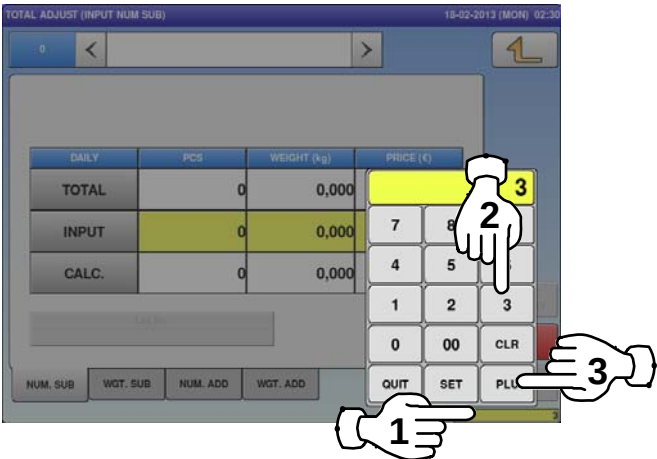


3. Enter the quantity, weight, and price to be subtracted and press the applicable fields. Then, press the [SUB] button on the screen.

4. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

EXAMPLE

Quantity “1 pc.”, Weight “400g”, Price “\$1.50”

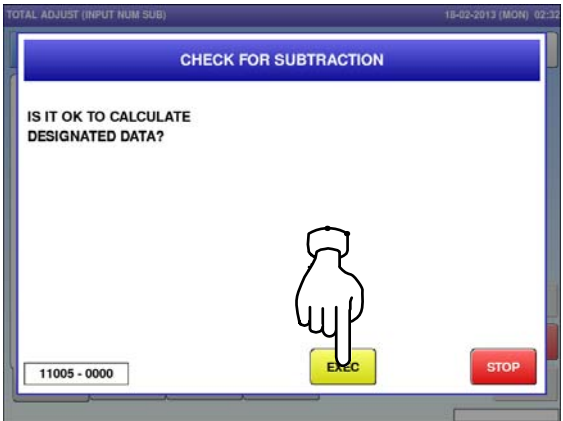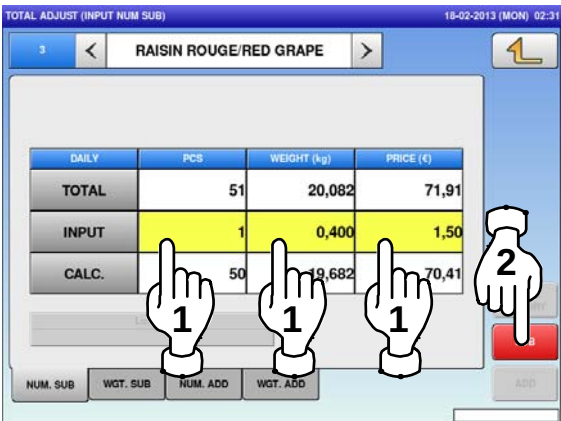

5. The subtraction procedure has been completed.

TOTAL ADJUST (INPUT NUM SUB)18-02-2013 (MON) 02:32

1<RAISIN ROUGE/RED GRAPE>

DAILY	PCS	WEIGHT (kg)	PRICE (€)
TOTAL	50	19,682	70,41
INPUT	0	0,000	0,00
CALC.	50	19,682	70,41

Lot No

NUM. SUBWGT. SUBNUM. ADDWGT. ADD

TRACE
HISTORY


SUB

ADD


2.3.25 SUBTRACTING TOTALS THROUGH WEIGHING PRODUCTS

1.

Press the "TOTAL ADJUST" icon.

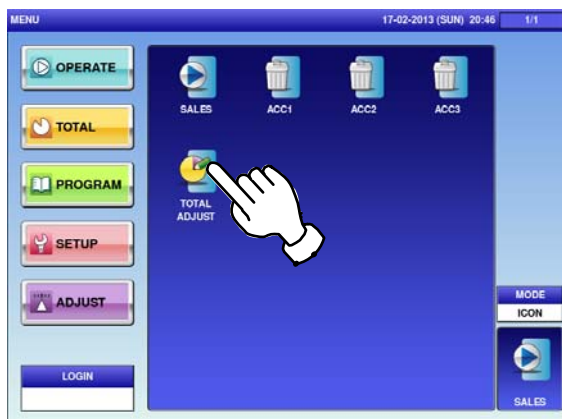


The "Total Adjust (Input Number Subtraction)" screen is displayed.

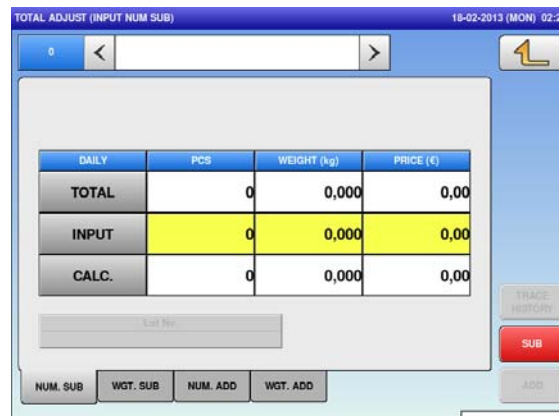

2.

To display the "Total Adjust (Weighing Subtraction)" screen, press the "WGT. SUB" tab.

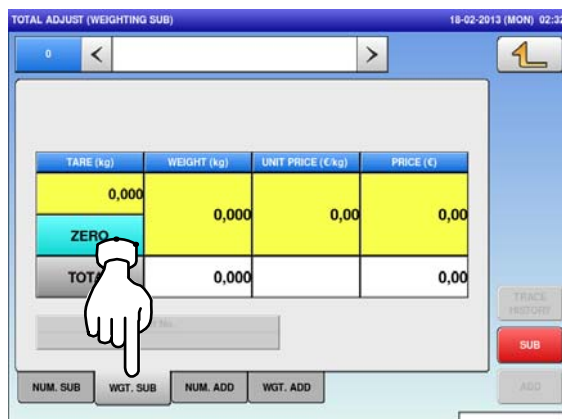

3.

Press the input field at the right-bottom of the screen to display the keypad. Then, enter a PLU number and press the [PLU] key on the keypad.

EXAMPLE

PLU No.3




The "Total Adjust (Weighing Subtraction)" screen for the selected product is displayed.




4.

Put the product on the weighing platter and press the [SUB] button.

PRODUCT




5. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

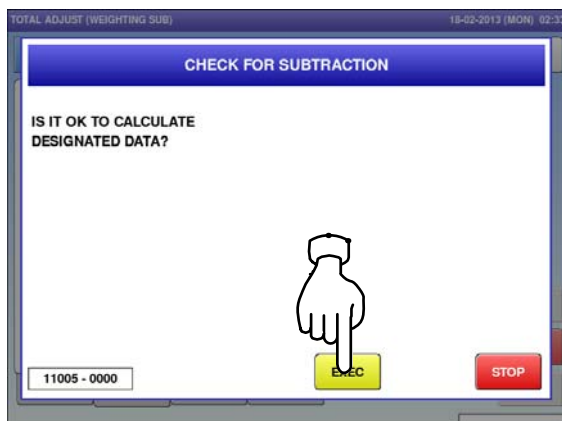


6. Remove the product from the weighing platter to complete the subtraction procedure.

PRODUCT

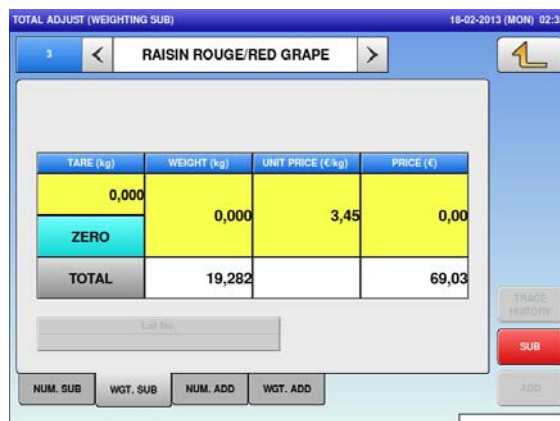

2.3.26 ADDING TOTALS THROUGH MANUAL ENTRY


1. Press the "TOTAL ADJUST" icon.

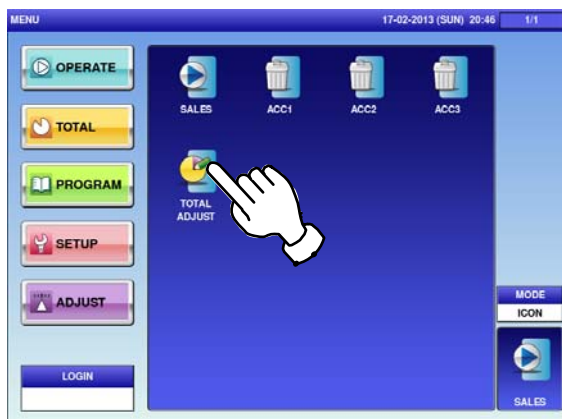

- The "Total Adjust (Input Number Subtraction)" screen is displayed.




2. To display the "Total Adjust (Input Number Addition)" screen, press the "NUM. ADD" tab.

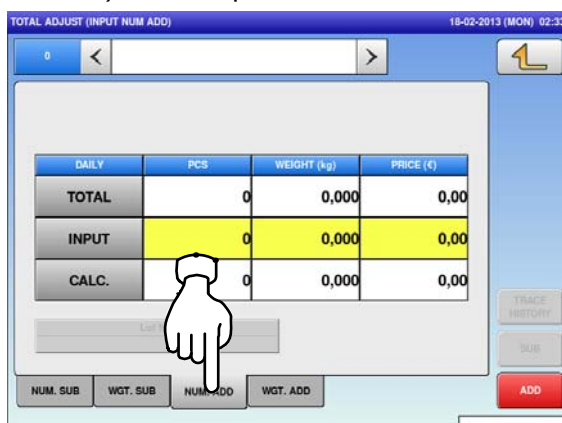


3. Press the input field at the right-bottom of the screen to display the keypad. Then, enter a PLU number and press the [PLU] key on the keypad.

EXAMPLE PLU No.3

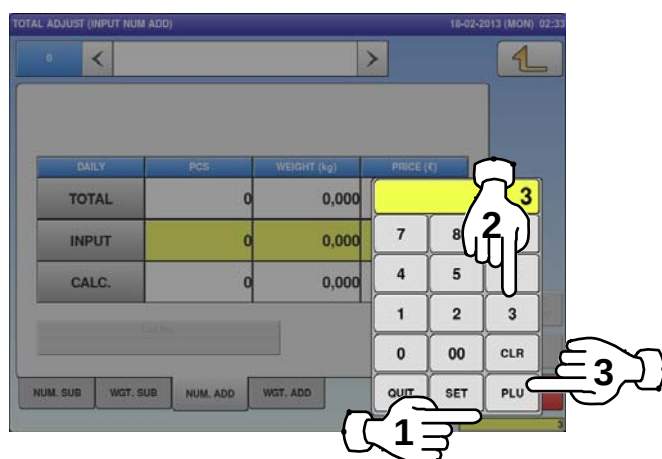


- The "Total Adjust (Input Number Addition)" screen for the selected product is displayed.

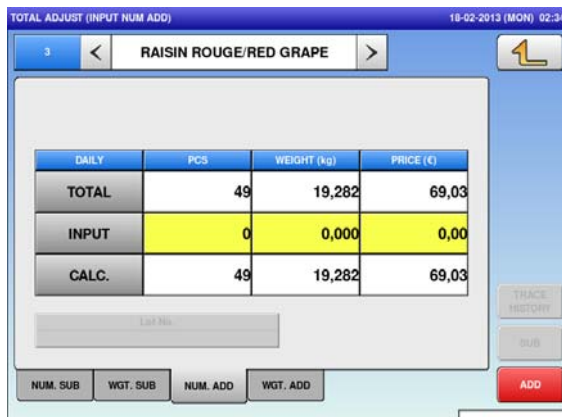


4. Enter the quantity, weight, and price to be added and press the applicable fields. Then, press the [ADD] button.


EXAMPLE Quantity "1 pc.", Weight "400g", Price "\$1.50"

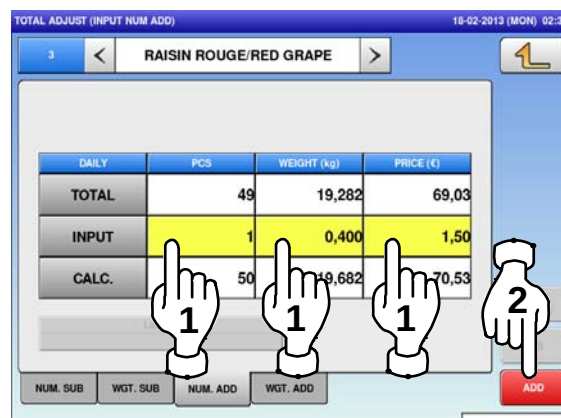

5. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

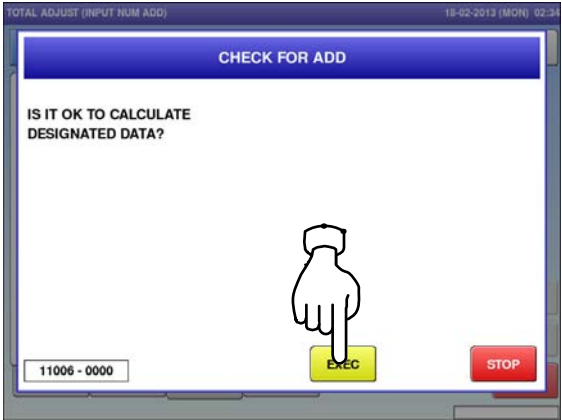


6. The addition procedure has been completed.

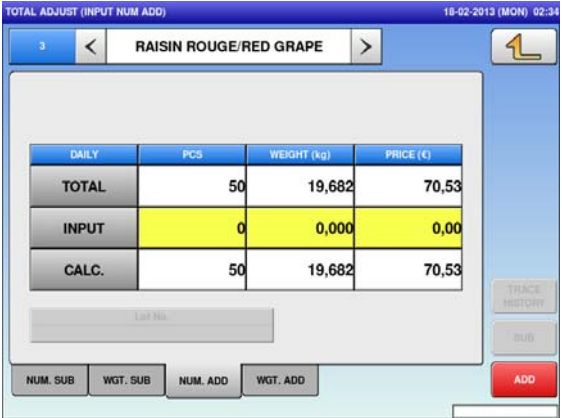

2.3.27 ADDING TOTALS THROUGH WEIGHING PRODUCTS

1.

Press the "TOTAL ADJUST" icon.

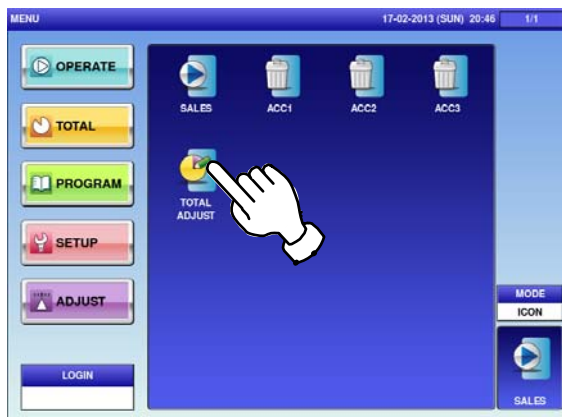


The "Total Adjust (Input Number Subtraction)" screen is displayed.



2.

To display the "Total Adjust (Weighing Add)" screen, press the [WGT. ADD] tab.

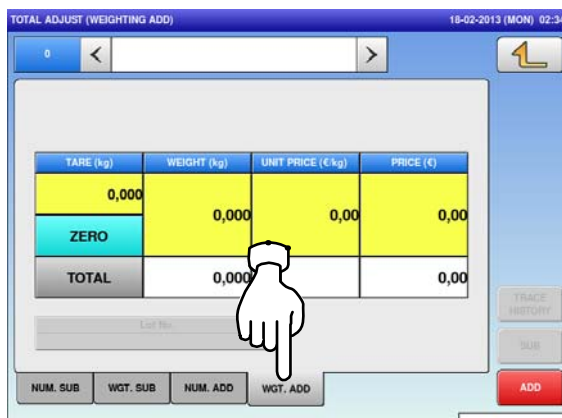


3.

Press the input field at the right-bottom of the screen to display the keypad. Then, enter a PLU number and press the [PLU] key on the keypad.

EXAMPLE

PLU No.3

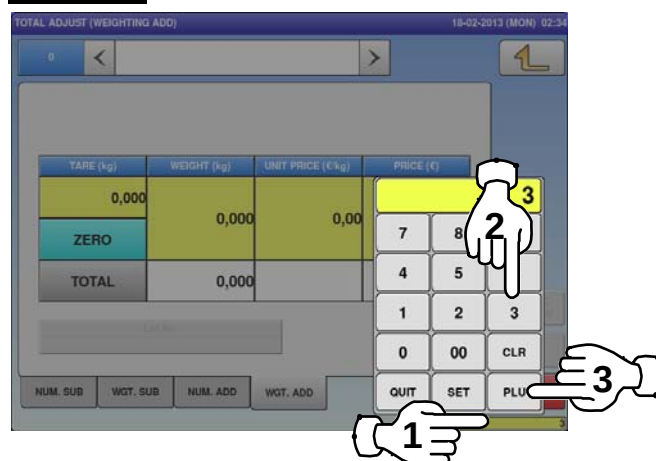



The "Total Adjust (Weighing Add)" screen for the selected product is displayed.




4.

Put the product on the weighing platter and press the [ADD] button.

PRODUCT

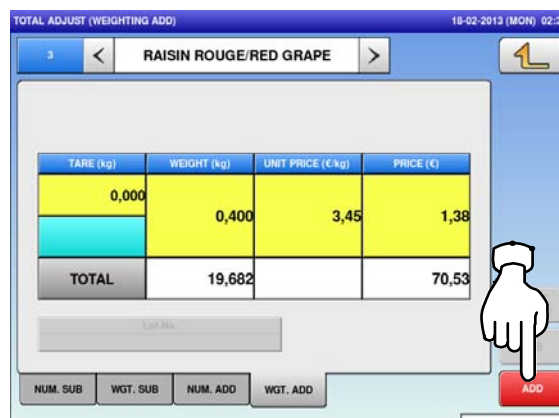

5. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

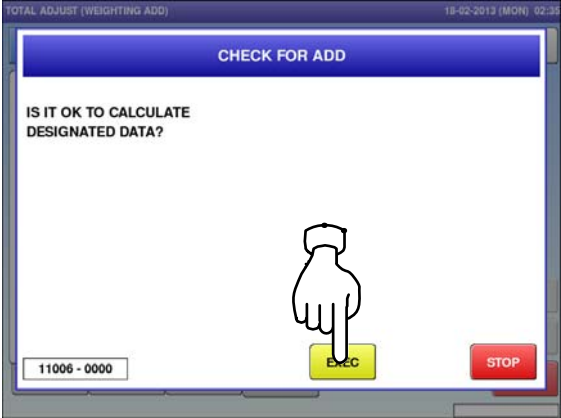

6. Remove the product from the weighing platter to complete the addition procedure.

PRODUCT




TOTAL MODE


3.1 total MODE ENTRY / exit

1. Make sure that the initial screen is displayed. Then, press the Return button on the screen to display the "Menu" screen.
2. Press the [TOTAL] button.

Note: The contents of the initial screen may differ depending on the settings on your machine.

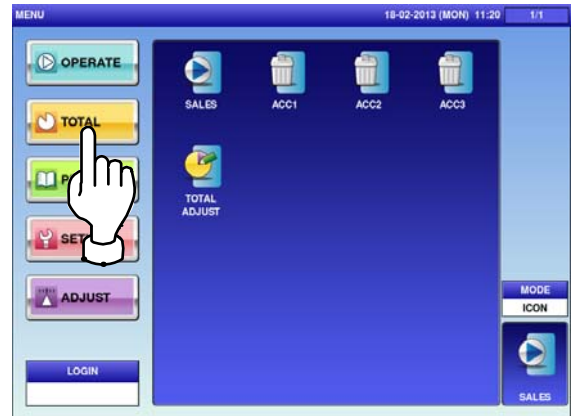


➡ The total menu selection screen is displayed.

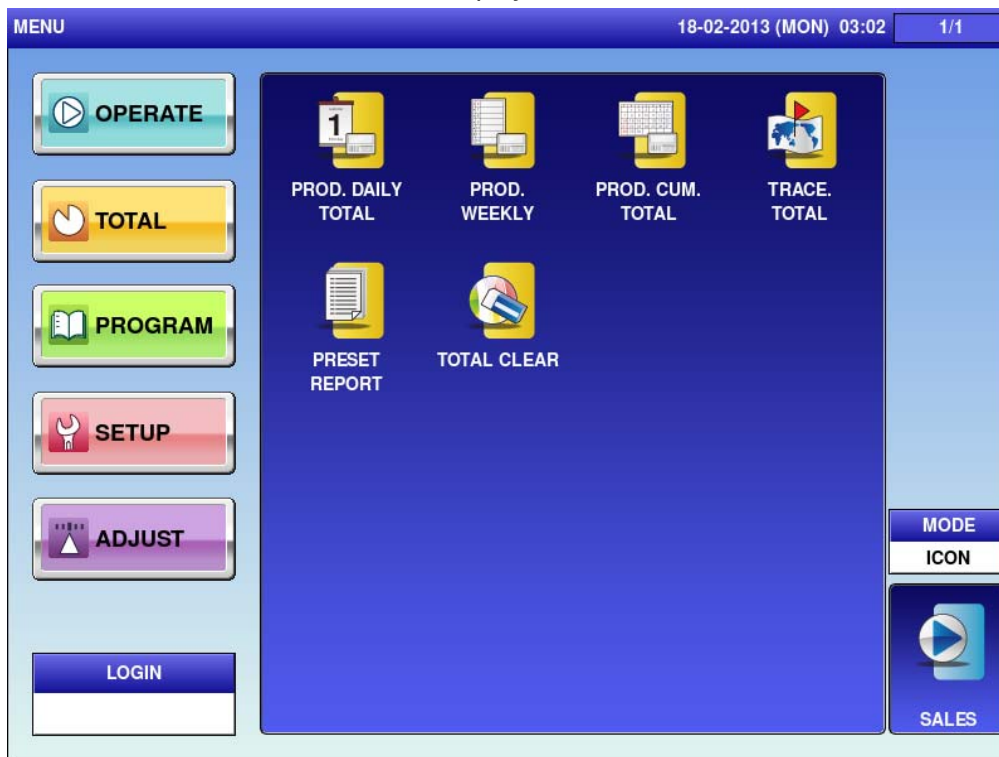

Note: To exit the Total Mode, press the [SALES] button.

3.2 DAILY TOTALS

1. The total menu selection screen is displayed.

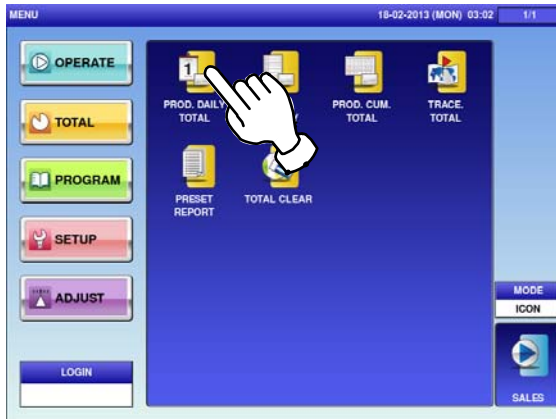

- The "Production Daily Total (Total)" screen is displayed.

The 'PROD. DAILY TOTAL (TOTAL)' screen shows production statistics for MACHINE No. 1. It includes fields for QUANTITY, WEIGHT, and PRICE. The date and time are 18-02-2013 (MON) 03:03.

TOTAL		
QUANTITY	WEIGHT	PRICE
54 PCS	20,882 kg	78,93 €
AVERAGE WEIGHT		AVERAGE PRICE
0,386 kg/PCS		1,46 €/PCS

SUBTRACT		
QUANTITY	WEIGHT	PRICE
5 PCS	2,000 kg	7,01 €

Buttons: FEED, PRINT, ANALY. The bottom tabs are TOTAL, HOUR, DEPT., GROUP, PLU, OPER, TYPE.

2. To display the "Production Daily Total (Hourly)" screen, press the "HOUR" tab. To turn pages, press [▼] or [▲].

The 'PROD. DAILY TOTAL (HOUR)' screen displays a table of hourly production data. A hand cursor points to the 'HOUR' tab. The date and time are 18-02-2013 (MON) 03:03.

No.	HOURLY PERIOD	PCS	WEIGHT (kg)	PRICE (€)
TOTAL				
0	00:00 - 00:59	0	0,000	0,00
1	01:00 - 01:59	51	20,082	71,91
2	02:00 - 02:59	1	0,000	1,45
3	03:00 - 03:59	2	0,800	5,57
4	04:00 - 04:59	0	0,000	0,00
5	05:00 - 05:59	0	0,000	0,00
6	06:00 - 06:59	0	0,000	0,00
7	07:00 - 07:59	0	0,000	0,00
8	08:00 - 08:59	0	0,000	0,00
9	09:00 - 09:59	0	0,000	0,00

Buttons: FEED, PRINT, ANALY. The bottom tabs are TOTAL, HOUR, DEPT., GROUP, PLU, OPER, TYPE.

3. To display the "Production Daily Total (Department)" screen, press the "DEPT." tab.

The 'PROD. DAILY TOTAL (DEPT.)' screen displays a table of departmental production data. A hand cursor points to the 'DEPT.' tab. The date and time are 18-02-2013 (MON) 03:04.

No.	DEPARTMENT	PCS	WEIGHT (kg)	PRICE (€)
TOTAL				
0	OTHER DEPT.	54	20,882	78,93

Buttons: FEED, PRINT, ANALY. The bottom tabs are TOTAL, HOUR, DEPT., GROUP, PLU, OPER, TYPE.



The 'PROD. DAILY TOTAL (HOUR)' screen displays a table of hourly production data. A hand cursor points to the 'HOUR' tab. The date and time are 18-02-2013 (MON) 03:04.

No.	HOURLY PERIOD	PCS	WEIGHT (kg)	PRICE (€)
TOTAL				
20	20:00 - 20:59	0	0,000	0,00
21	21:00 - 21:59	0	0,000	0,00
22	22:00 - 22:59	0	0,000	0,00
23	23:00 - 23:59	0	0,000	0,00

Buttons: FEED, PRINT, ANALY. The bottom tabs are TOTAL, HOUR, DEPT., GROUP, PLU, OPER, TYPE.

4. To display the “Production Daily Total (Group)” screen, press the “GROUP” tab.

No.	GROUP	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		54	20,882	78,93
0	OTHER GROUP	54	20,882	78,93

5. To display the “Production Daily Total (PLU)” screen, press the “PLU” tab.

No.	GROUP	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		54	20,882	78,93
0	OTHER GROUP	54	20,882	78,93

6. Press the input field at the right-bottom of the screen to display the keypad. Then, enter a desired PLU number and press the [PLU] key on the keypad.

EXAMPLE PLU No.3

No.	GROUP	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		54	20,882	78,93
0	OTHER GROUP	54	20,882	78,93

No.	GROUP	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		54	20,882	78,93
0	OTHER GROUP	54	20,882	78,93


7. To display the “Production Daily Total (Operator)” screen, press the “OPER.” tab.

No.	OPERATOR	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		54	20,882	78,93
0000		54	20,882	78,93


8. To display the “Production Daily Total (Type)” screen, press the “TYPE” tab.

No.	DEPT.	GROUP	TYPE
TOTAL		54	20,882
0000		54	20,882

9. Select the target reports by pressing a desired button.

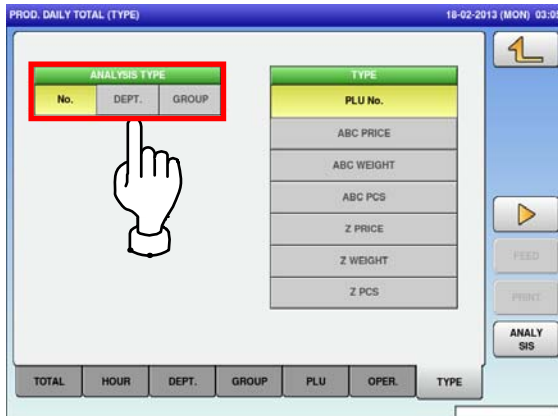

10. Select the listing order by pressing a desired button.

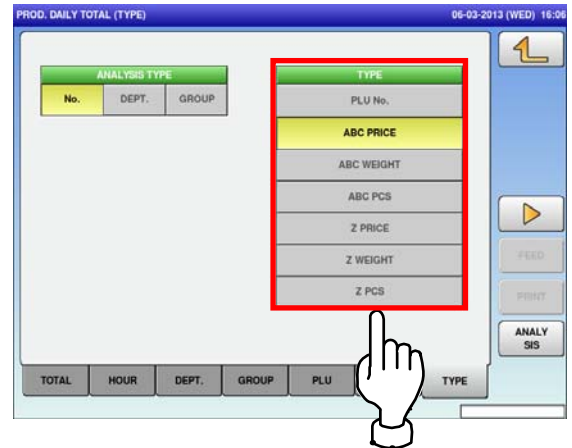


No.	The total analysis is performed for all products.
DEPT.	The total analysis is performed for all departments.
GROUP	The total analysis is performed for all groups.
PLU No.	The total analysis is performed in ascending PLU number order.
ABC PRICE	The total analysis is performed in descending price order.
ABC WEIGHT	The total analysis is performed in descending weight order.
ABC PCS	The total analysis is performed in descending quantity order.
Z PRICE	The total analysis is performed in ascending price order.
Z WEIGHT	The total analysis is performed in ascending weight order.
Z PCS	The total analysis is performed in ascending quantity order.



3.3 WEEKLY TOTALS

1. Press the “PROD. WEEKLY” icon.

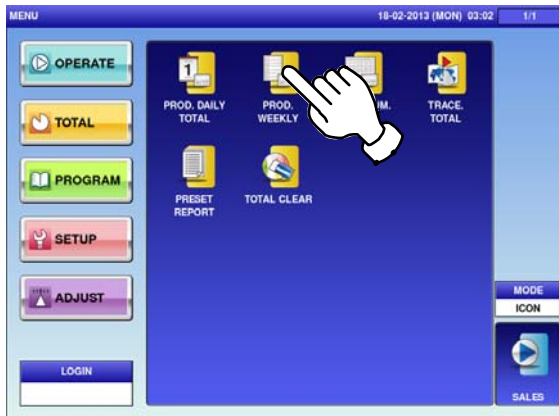

The Weekly Total (Week) screen is displayed.

The screenshot shows the 'PROD. WEEKLY TOTAL (WEEK)' screen. It displays a table with columns: No., WEEK DAILY, PCS, WEIGHT (kg), and PRICE (€). The table shows data for the week of 18-02-2013 (MON) 03:06. The 'TOTAL' row shows 60 PCS, 31,620 kg, and 98,06 €. The table also shows data for each day of the week (SUN to SAT).

No.	WEEK DAILY	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		60	31,620	98,06
0	SUN	0	0,000	0,00
1	MON	0	0,000	0,00
2	TUE	3	0,350	6,35
3	WED	53	20,882	77,48
4	THU	3	10,388	12,78
5	FRI	1	0,000	1,45
6	SAT	0	0,000	0,00

Buttons: FEED, PRINT

3. To display the “Production Weekly Total” total for the day-of-the week, press a desired day-of-the week tab.
To turn pages, press the [▼] or [▲].

The screenshot shows the 'PROD. WEEKLY TOTAL (SUN)' screen. It displays a table with columns: No., WEEK DAILY, PCS, WEIGHT (kg), and PRICE (€). The table shows data for Sunday (SUN) for the week of 18-02-2013 (MON) 03:06. The 'TOTAL' row shows 0 PCS, 0,000 kg, and 0,00 €. The table also shows data for each hour of the day (00:00 to 09:59). A hand cursor is pointing at the 'SUN' tab, and another hand cursor is pointing at the 'PRINT' button.

No.	WEEK DAILY	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		0	0,000	0,00
0	00:00 - 00:59	0	0,000	0,00
1	01:00 - 01:59	0	0,000	0,00
2	02:00 - 02:59	0	0,000	0,00
3	03:00 - 03:59	0	0,000	0,00
4	04:00 - 04:59	0	0,000	0,00
5	05:00 - 05:59	0	0,000	0,00
6	06:00 - 06:59	0	0,000	0,00
7	07:00 - 07:59	0	0,000	0,00
8	08:00 - 08:59	0	0,000	0,00
9	09:00 - 09:59	0	0,000	0,00

Buttons: WEEK, SUN, MON, TUE, WED, THU, FRI, SAT, PRINT




The screenshot shows the 'PROD. WEEKLY TOTAL (SUN)' screen, page 3/3. It displays a table with columns: No., WEEK DAILY, PCS, WEIGHT (kg), and PRICE (€). The table shows data for Sunday (SUN) for the week of 18-02-2013 (MON) 03:06. The 'TOTAL' row shows 0 PCS, 0,000 kg, and 0,00 €. The table also shows data for each hour of the day (20:00 to 23:59). A hand cursor is pointing at the 'SUN' tab, and another hand cursor is pointing at the 'FEED' button.

No.	WEEK DAILY	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		0	0,000	0,00
20	20:00 - 20:59	0	0,000	0,00
21	21:00 - 21:59	0	0,000	0,00
22	22:00 - 22:59	0	0,000	0,00
23	23:00 - 23:59	0	0,000	0,00

Buttons: WEEK, SUN, MON, TUE, WED, THU, FRI, SAT, FEED, PRINT

3.4 CUMULATIVE TOTALS

1. Press the "PROD. CUM. TOTAL" icon.

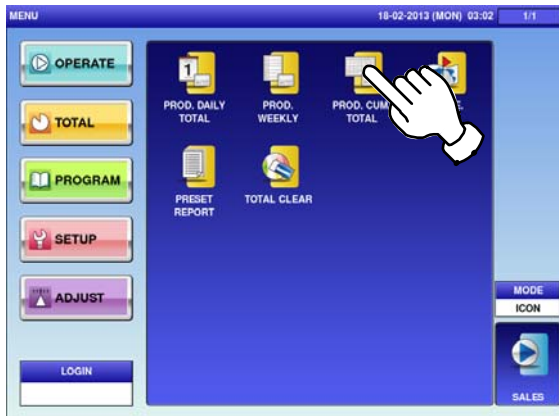

The "Cumulative Total (Total)" screen is displayed.

3. To display total for departments, press the "DEPT." tab.

No.	DEPARTMENT	PCS	WEIGHT (kg)	PRICE (€)
	TOTAL	60	31,620	98,06
0	OTHER DEPT.	60	31,620	98,06

4. To display total for groups, press the "GROUP" tab.

No.	GROUP	PCS	WEIGHT (kg)	PRICE (€)
	TOTAL	60	31,620	98,06
0	OTHER GROUP	60	31,620	98,06

5. To display total for operators, press the "OPER." tab.


No.	OPERATOR	PCS	WEIGHT (kg)	PRICE (€)
	TOTAL	60	31,620	98,06
0000		59	31,270	94,61
0002	BETTY	1	0,350	3,45

6. To display analysis totals, press the "TYPE" tab.

No.	The total analysis is performed for all products.
DEPT.	The total analysis is performed for all departments.
GROUP	The total analysis is performed for all groups.
PLU No.	The total analysis is performed in ascending PLU number order.
ABC PRICE	The total analysis is performed in descending price order.
ABC WEIGHT	The total analysis is performed in descending weight order.
ABC PCS	The total analysis is performed in descending quantity order.

Z PRICE	The total analysis is performed in ascending price order.
Z WEIGHT	The total analysis is performed in ascending weight order.
Z PCS	The total analysis is performed in ascending quantity order.

7. Select the target reports and listing order by pressing desired buttons, and press the [ANALYSIS] button.

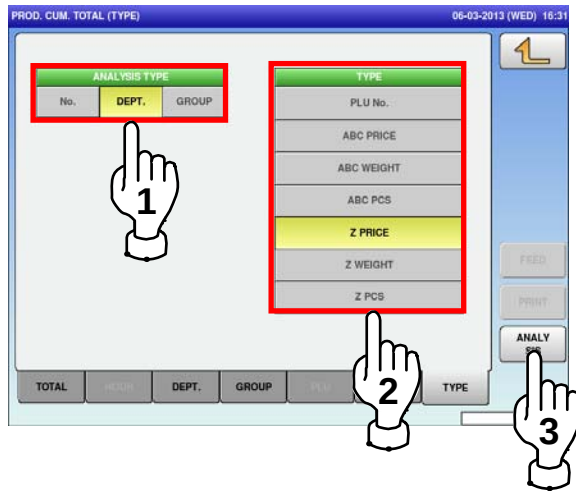

PROD. CUMULATIVE TOTAL / ANALYSIS 06-03-2013 (WED) 16:31 1/1

CLASSIFICATION < DEPT. >

ANALYSIS TYPE Z PRICE

CATEGORY SELECT < 0 >


No.	PLU NAME	PCS	WEIGHT (kg)	PRICE (€)
TOTAL		60	31,620	98,06
4	POMME ROYALE/APPLE ROYAL	3	0,000	4,35
110	TILAPIA FILLET SKIN-ON	2	0,800	5,57
1	BANANE/BANANA	3	10,388	12,78
3	RAISIN ROUGE/RED GRAPE	52	20,432	75,36

FEED


PRINT

3.5 TRACEABILITY TOTALS

1. Press the "TRACE. TOTAL" icon.

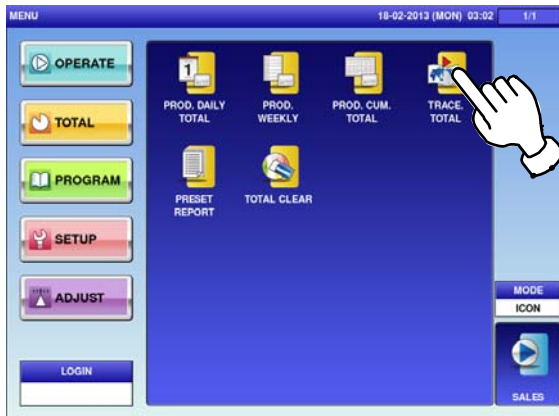


For more information, refer to the Service Manual for UNI-9.

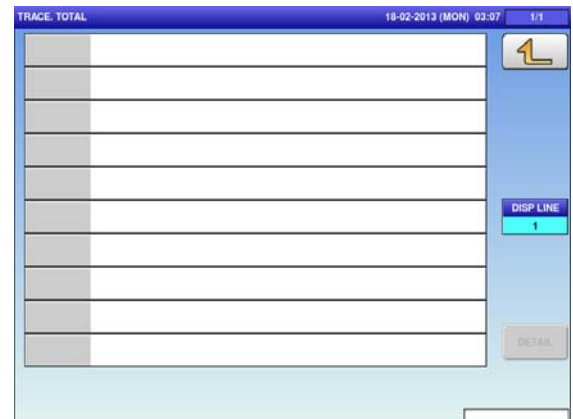


3.6 PRESET REPORTS


1. Press the "PRESET REPORT" icon.

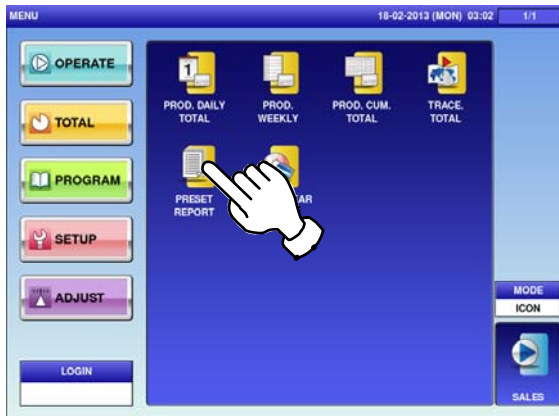

The "Preset Report" screen is displayed.

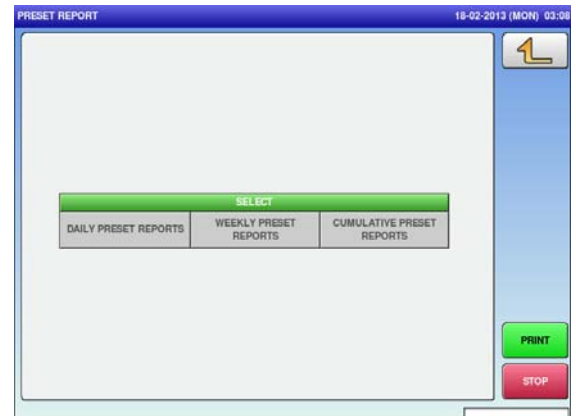


2. Select a desired report type by pressing the corresponding fields.
Press the [PRINT] button to issue the selected reports.

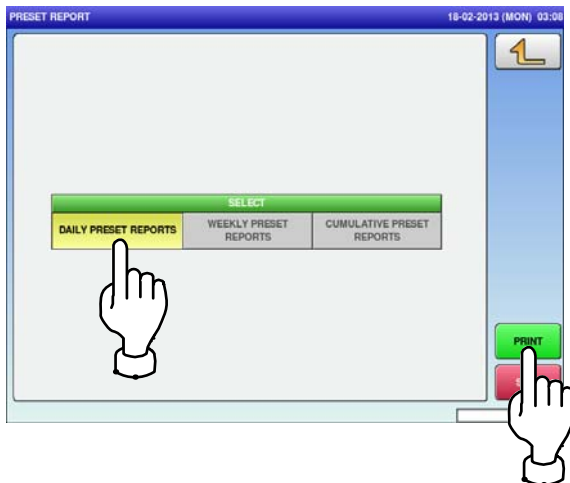

3.7 TOTAL CLEAR


1. Press the "TOTAL CLEAR" icon.

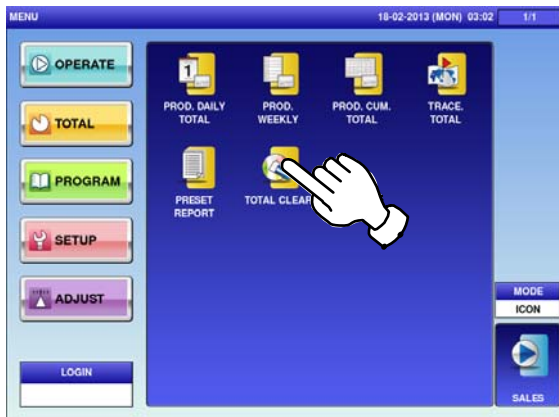


→ The "Total Clear" screen is displayed.



2. Select desired reports to be cleared by pressing the corresponding fields. Then, press the [DELETE] button.

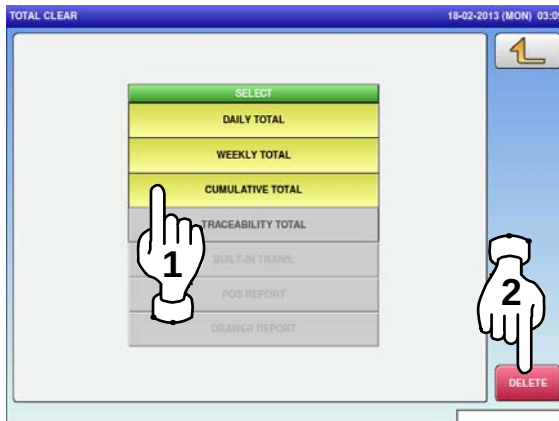

3. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

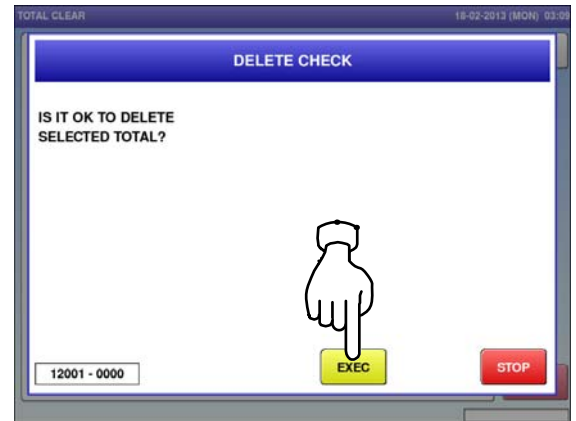

PROGRAM MODE


4.1 program MODE ENTRY / exit

1. Ensure that the initial screen is displayed, and press the Return button on the screen.

Note: The contents of the initial screen may differ depending on the settings on your machine.






2. The "Menu" screen is displayed. Then, press the [PROGRAM] button.

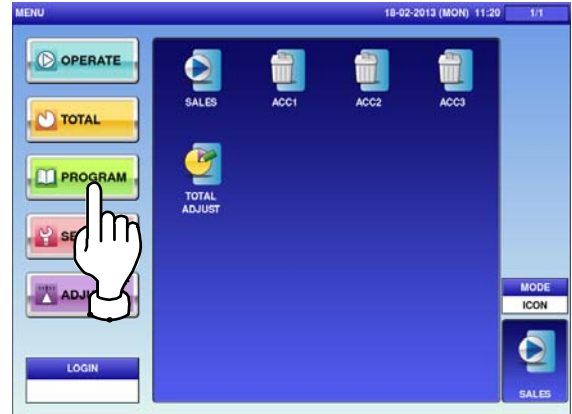

The program menu selection screen is displayed.

To turn pages, press [▼] or [▲].

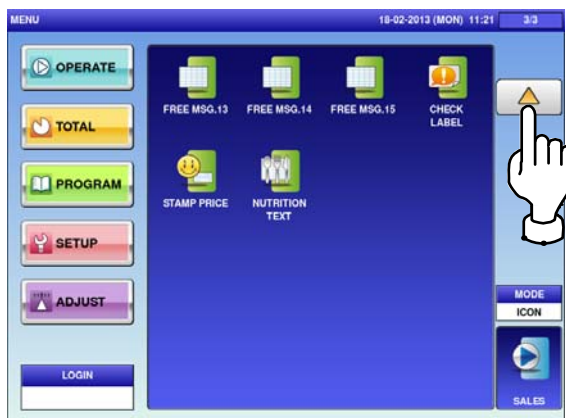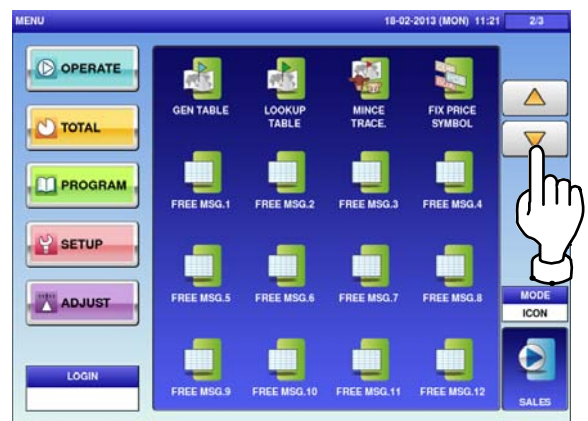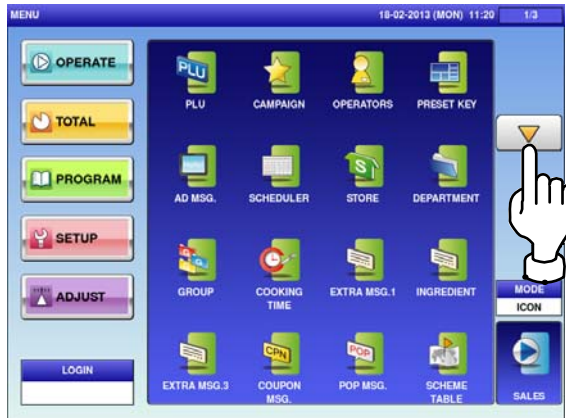

Note: To exit the Program Mode, press the [SALES] button.

4.2 PLU DATA

1.

Press the “PLU” icon on the menu selection screen.



The “PLU” screen is displayed.
To turn pages, press [▼] or [▲].




2.

Select a desired PLU by pressing the corresponding field, and press the [DETAIL] button.



3.

The “PLU Detail (Sales)” screen is displayed.
To edit the PLU name, press the name field.

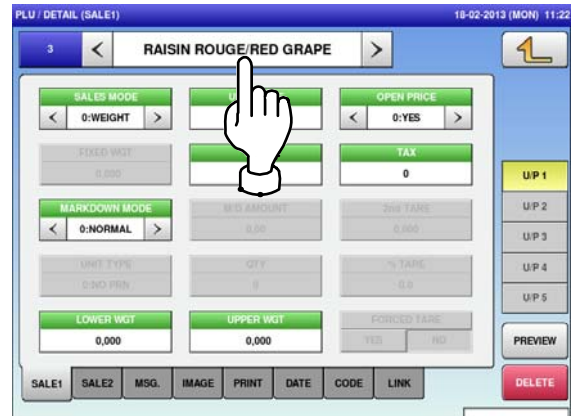


4.

The “PLU Name Edit” screen is displayed.
Edit text according to the procedure described in Appendix “Text Editing”.



5.

Press the “SALE 1” tab to display the “PLU Detail (Sale 1)” screen.
The screen below shows that “Sales Mode” is set for selling weighing products.

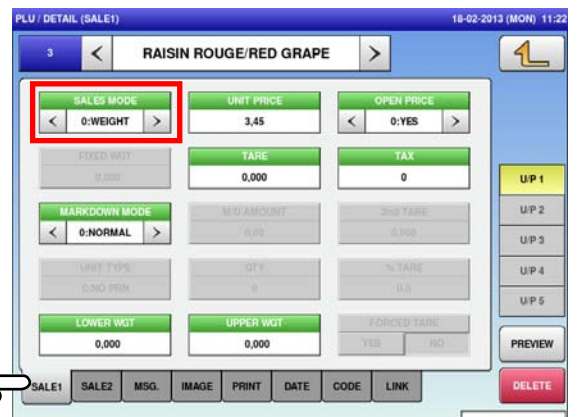



PLU / DETAIL (SALE1) 18-02-2013 (MON) 11:22

3 < RAISIN ROUGE/RED GRAPE >

SALES MODE < 1:FIX PRI >

FIXED PRICE 3,45

OPEN PRICE < 0:YES >

FIXED WGT 0,000

TARE 0,000

TAX 0

MARKDOWN MODE < 0:NORMAL >

M/D AMOUNT 0,00

2nd TARE 0,000

UNIT TYPE 0:NO PRN

QTY 0

% TARE 0.0

LOWER WGT 0,000

UPPER WGT 0,000

FORCED TARE YES NO

U/P 1

U/P 2

U/P 3

U/P 4


U/P 5

PREVIEW

DELETE

SALE1 **SALE2** **MSG.** **IMAGE** **PRINT** **DATE** **CODE** **LINK**

SALES MODE	Press [<] or [>] to select a desired sales mode.
	0: Weight (for selling weighing products) 1: Fix price (for selling fixed price products) 2: Weight fix price (for selling weighing fixed price products) 3: Fix unit price (for selling fixed unit price products) 4: Weight (100 g) (when the setting of the unit price per 100 g is needed in accordance of the laws of a country) 5: Fix unit price (minus) (when the setting of the minus sale is needed in accordance of the laws of a country)
UNIT PRICE / FIXED PRICE	Enter the unit price or fixed price and press this field.
OPEN PRICE	Press [<] or [>] to select whether or not to allow an open price system.
	0: Yes 1: No
FIXED WEIGHT	Enter the fixed weight and press this field.
TARE	Enter the tare weight and press this field.
TAX	Enter a numerical value and press this field.
MARKDOWN MODE	Press [<] or [>] to select a desired markdown mode.
	0: Normal price 1: Special price 2: Amount discount for total price 3: Percent discount for total price 4: Special unit price 5: Amount discount for unit price 6: Percent discount for unit price
M/D AMOUNT	Enter the markdown amount or percentage and press this field.
2nd TARE	Enter the tare weight, and press this field.

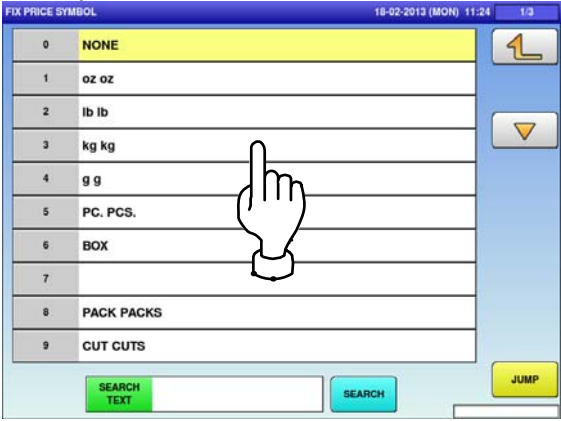UNIT TYPE	Press the "UNIT TYPE" field to display the "Fix Price Symbol" screen. Then, press a desired field for selection. 
QTY	Enter the packed quantity and press this field.
TARE	Enter the tare percentage and press this field.
LOWER WEIGHT	Enter the lower weight limit and press this field.
UPPER WEIGHT	Enter the upper weight limit and press this field.
FORCED TARE	Press [Yes] or [No] button to select whether or not to use the forced tare function.

6. Press the "SALE 2" tab to select the second sale related screen.

PLU / DETAIL (SALE2) 18-02-2013 (MON) 11:24


3 < RAISIN ROUGE/RED GRAPE >

POINT FLAG: < 0:OFF > POINT TYPE: < 0:WGT > POINTS: 0

DEPOSIT FLAG: < 0:OFF >

U/P 1, U/P 2, U/P 3, U/P 4, U/P 5, PREVIEW, DELETE


SALE1, SALE2, MSG., IMAGE, PRINT, DATE, CODE, LINK

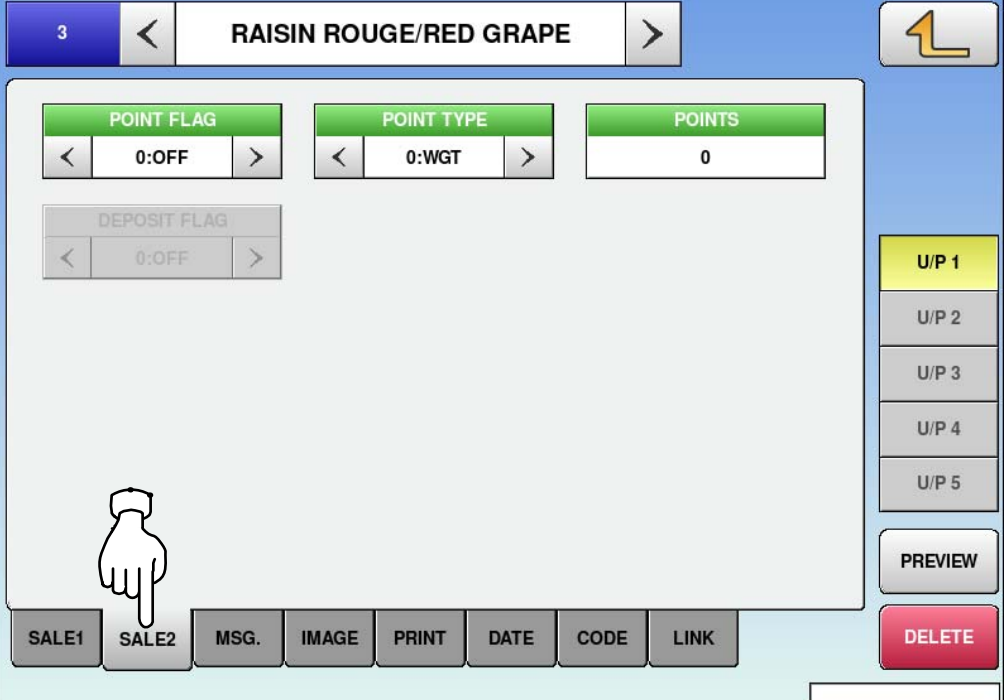

ITEM	DESCRIPTIONS
POINT FLAG	Press [<] or [>] to select whether or not to use the point flag.
	0: OFF
	1: ON
POINT TYPE	Press [<] or [>] to select a desired point type.
	0: Weight
	1: Fixed weight
POINTS	Enter a desired number and press this field.


7.

Press the “MSG.” tab to select the message related screen.

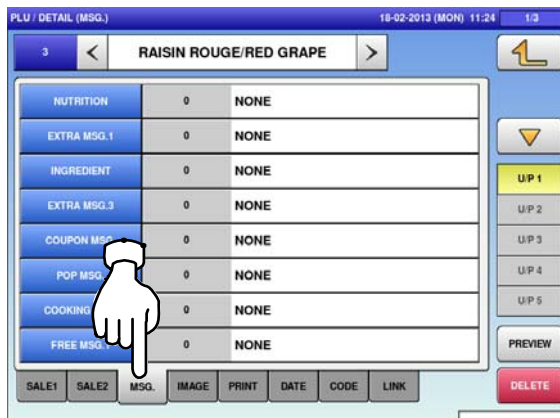

8.

Press a desired field for selection.

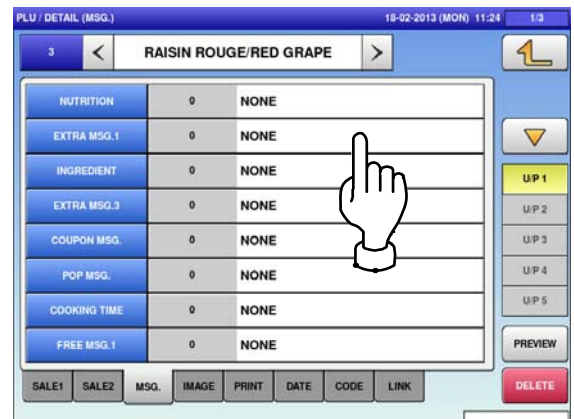


9.

The “Extra Message” screen is displayed. Press a desired field for selection.



The selected message has been registered.

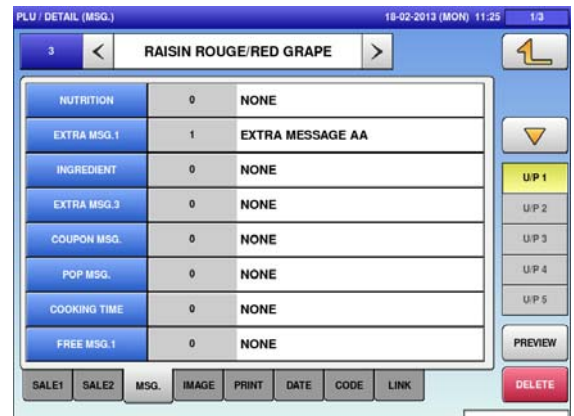



10.

Press the “IMAGE” tab to display the “PLU / Detail (Image)” screen.


11.

Press a desired field for selection.

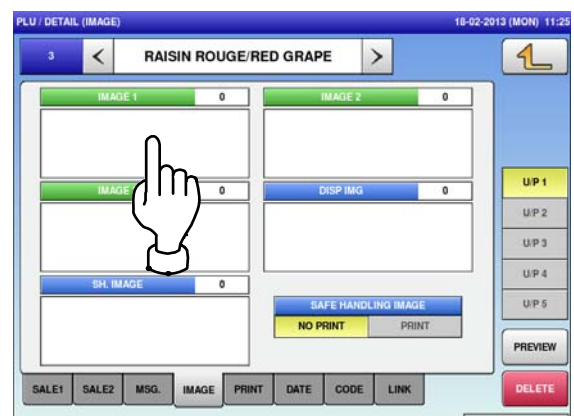


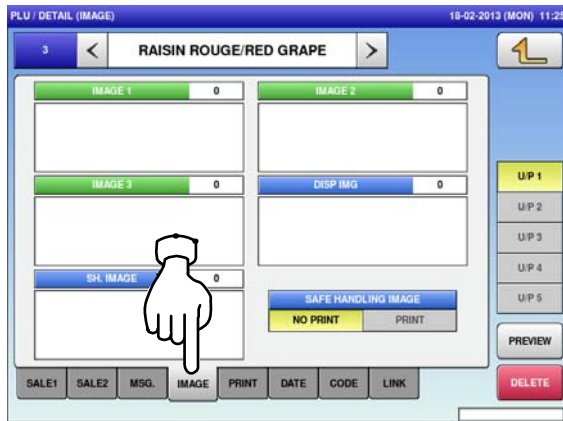


12. The "Image" screen is displayed. Press a desired image for selection.

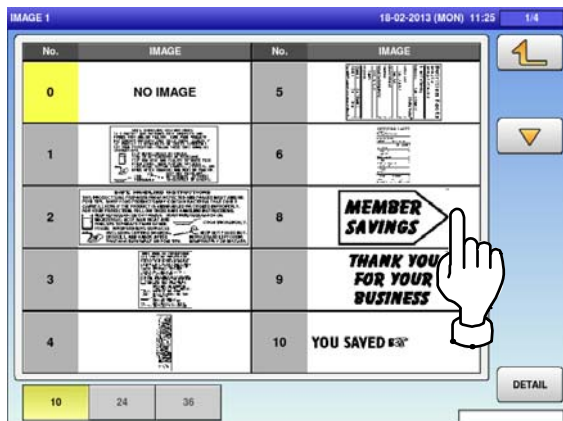

13. The selected image has been registered. Press [NO PRINT] or [PRINT] in the "Safe Handling Image" field to select whether or not to print the image.

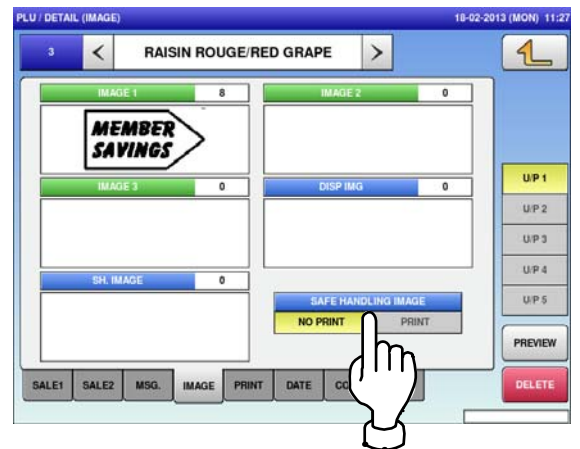


14. Press a desired display image field.

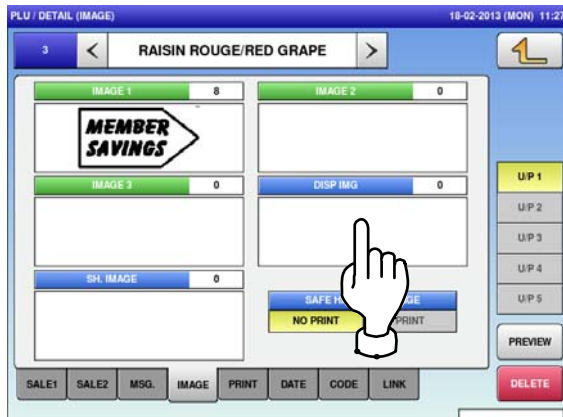


15. The Display Image screen is displayed. Press a desired image for selection.
Note: To use images stored in the USB memory, press [STORAGE] key. The movie file with the format of MPEG-4, 800 x 600 (SVGA), 10 Mbps, 25 FPS can also be used. Then, press the [SET] button.



- 16.** The selected image has been registered. Press [NO PRINT] or [PRINT] in the “Safe Handling Image” field to select whether or not to print the image.

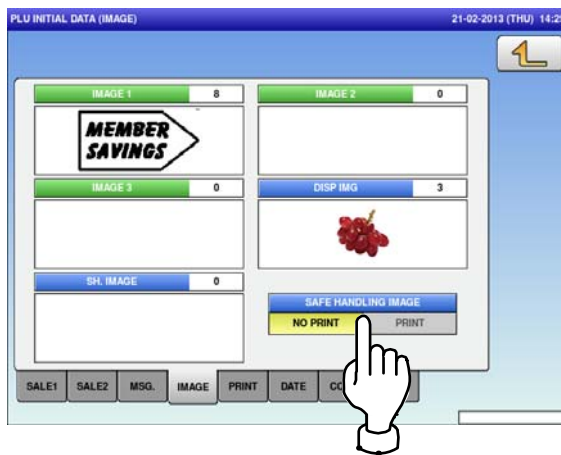

- 17.** Press the “PRINT” tab to display the PLU / Detail (Print) screen.

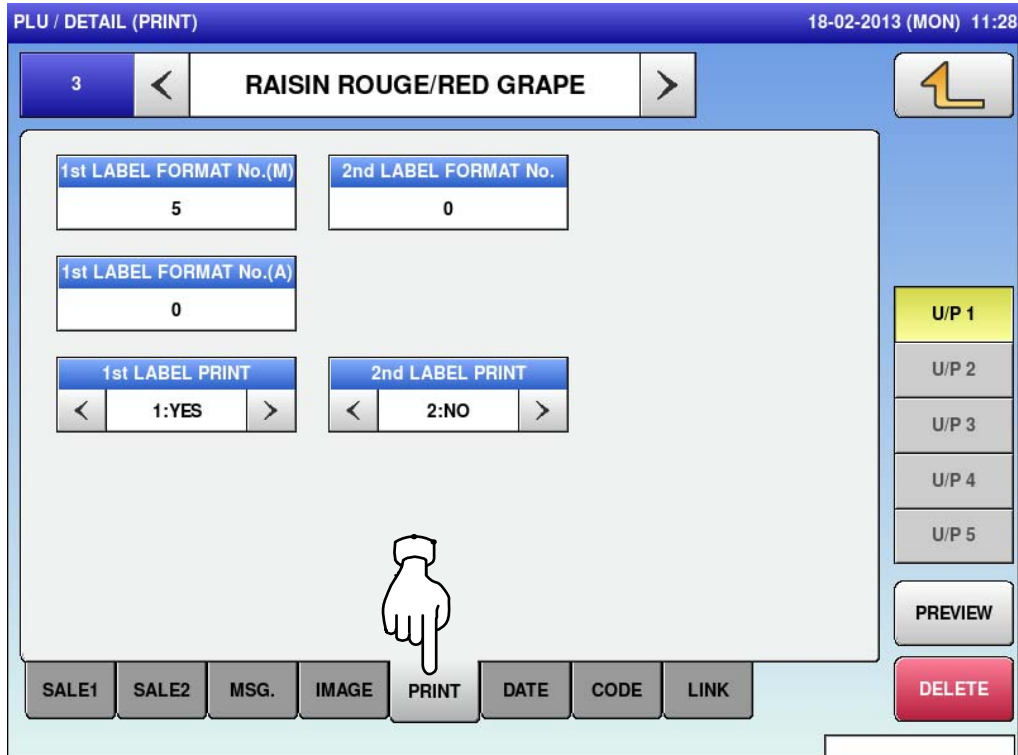

ITEM	DESCRIPTIONS
1st LABEL FORMAT No. (M)	Enter a desired format number and press this field.
2nd LABEL FORMAT No.	Enter a desired format number and press this field.
1st LABEL FORMAT No. (A)	Enter a desired format number and press this field.
1st LABEL PRINT	Press [<] or [>] to select whether or not to print the first label. 1: Yes 2: No
2nd LABEL PRINT	Press [<] or [>] to select whether or not to print the second label. 1: Yes 2: No

18.

Press the "DATE" tab to display the PLU / Detail (Date) screen.

PLU / DETAIL (DATE) 18-02-2013 (MON) 11:29

3 < RAISIN ROUGE/RED GRAPE >

PACK DATE PRINT: YES NO

PACK TIME PRINT: < 2:CLOCK >

PACK TIME DATA

SB DATE PRINT: YES NO

SB TIME PRINT: < 0:NO PRINT >

SB TIME DATA: 0 HOUR(S) AFTER

SHELF LIFE(days): 3 days

USE BY DATE PRINT: YES NO

UB DATE DATA

U/P 1 U/P 2 U/P 3 U/P 4 U/P 5

PREVIEW DELETE

SALE1 SALE2 MSG. IMAGE PRINT DATE CODE LINK

ITEM	DESCRIPTIONS
PACK DATE PRINT	Press [YES] or [NO] in this field to select whether or not to print the packed date.
PACK TIME PRINT	Press [<] or [>] to select a desired pack time printing method. 0: No print 1: Designated time 2: System clock time
PACK TIME DATA	This field is available only when "1: Designated time" is selected in "PACK

	TIME PRINT". Enter the time and press this field.
SB DATE PRINT	Press [YES] or [NO] in this field to select whether or not to print the sell-by date.
SB TIME PRINT	Press [<] or [>] to select a desired sell-by time printing method. 0: No print 1: Designated time 2: Relative time
SB TIME DATA	This field is available only when "Yes" is selected in "SB TIME PRINT". Enter the number of hours and press this field.
SHELF LIFE (days)	This field is available only when "Yes" is selected in "SB DATE PRINT". Enter the number of days and press this field.
USE BY DATE PRINT	Press [YES] or [NO] in this field to select whether or not to print the use-by date.
UB DATE DATA	This field is available only when "Yes" is selected in "USE BY DATE PRINT". Enter the number of hours and press this field.

19. Press the "CODE" tab to select the PLU / Detail (Code) screen.

PLU / DETAIL (CODE) 18-02-2013 (MON) 11:29

3 < RAISIN ROUGE/RED GRAPE >

ITEMCODE 00000000	REG. CODE 0	POS FLAG 02
BARCODE 00000000000000	POS REFERENCE < 0:REFER >	BARCODE TYPE 0:REFER
POS FORMAT (WGT) REFER	TRACE ENABLE YES NO	
DEPARTMENT No. 0	GROUP No. 00	

U/P 1
U/P 2
U/P 3
U/P 4
U/P 5
PREVIEW
DELETE

SALE1 SALE2 MSG. IMAGE PRINT DATE **CODE** LINK

ITEM	DESCRIPTIONS
ITEM CODE	Enter an item code and press this field.


REG CODE	Enter the register code and press this field.																						
POS FLAG	This field is available only when “1: PLU File” is selected in “POS REFERENCE”. Enter a POS flag number and press this field.																						
BARCODE	Enter a barcode number and press this field.																						
POS REFERENCE	Press [<] or [>] to select a desired reference method. 0: Refer 1: PLU file																						
BARCODE TYPE	This field is available only when “1: PLU File” is selected in “POS REFERENCE”. Press this field to display the Barcode Type screen, and press a desired PLU type for selection. <table border="1"> <thead> <tr> <th>Code</th><th>Description</th></tr> </thead> <tbody> <tr><td>000</td><td>REFER</td></tr> <tr><td>001</td><td>EAN/UPC 13</td></tr> <tr><td>002</td><td>EAN/UPC 8</td></tr> <tr><td>003</td><td>10 DIGITS 13</td></tr> <tr><td>004</td><td>5 DIGITS 8</td></tr> <tr><td>005</td><td>GS1</td></tr> <tr><td>006</td><td>GS1 ST</td></tr> <tr><td>007</td><td>GS1 STO</td></tr> <tr><td>008</td><td>GS1 LIM</td></tr> <tr><td>009</td><td>GS1 EXP</td></tr> </tbody> </table>	Code	Description	000	REFER	001	EAN/UPC 13	002	EAN/UPC 8	003	10 DIGITS 13	004	5 DIGITS 8	005	GS1	006	GS1 ST	007	GS1 STO	008	GS1 LIM	009	GS1 EXP
Code	Description																						
000	REFER																						
001	EAN/UPC 13																						
002	EAN/UPC 8																						
003	10 DIGITS 13																						
004	5 DIGITS 8																						
005	GS1																						
006	GS1 ST																						
007	GS1 STO																						
008	GS1 LIM																						
009	GS1 EXP																						

POS FORMAT (WGT)	Press this field to display the Barcode Format screen, and press a desired barcode format for selection. <table border="1"> <thead> <tr> <th>Code</th><th>Description</th></tr> </thead> <tbody> <tr><td>000</td><td>REFER</td></tr> <tr><td>001</td><td>FFCCCC(C/P)PPPP(C/D)</td></tr> <tr><td>002</td><td>FFCCCC(C/P)PPPP(C/D)</td></tr> <tr><td>003</td><td>FCCCCC(C/P)PPPP(C/D)</td></tr> <tr><td>004</td><td>FFCCCCPPPP(C/D)</td></tr> <tr><td>005</td><td>FCCCCC(C/P)PPPP(C/D)</td></tr> <tr><td>006</td><td>FFCCCC(C/P)PPPP(C/D)</td></tr> <tr><td>007</td><td>FFCCCCCWWWW(C/D)</td></tr> <tr><td>008</td><td>FCCCCCWWWW(C/D)</td></tr> <tr><td>009</td><td>FCCCCC(C/D)</td></tr> <tr><td>00A</td><td>FFCCCCPPPP(C/D) *</td></tr> <tr><td>00B</td><td>FFCCCCCWWWW(C/D) *</td></tr> <tr><td>00C</td><td>FFCCCC(C/W)WWWW(C/D)</td></tr> <tr><td>00D</td><td>Not Available</td></tr> <tr><td>00E</td><td>Not Available</td></tr> <tr><td>00F</td><td>FFCCCC(C/P)PPPP(C/D)</td></tr> <tr><td>010</td><td>FFCCCCCWWWW(C/D)</td></tr> <tr><td>011</td><td>FFCCCCPPPP(10)(C/D)</td></tr> <tr><td>012</td><td>FFCCCC(C/P)PPPP(10)(C/D)</td></tr> <tr><td>013</td><td>FFCCCC(C/W)WWWW(C/D)</td></tr> </tbody> </table>	Code	Description	000	REFER	001	FFCCCC(C/P)PPPP(C/D)	002	FFCCCC(C/P)PPPP(C/D)	003	FCCCCC(C/P)PPPP(C/D)	004	FFCCCCPPPP(C/D)	005	FCCCCC(C/P)PPPP(C/D)	006	FFCCCC(C/P)PPPP(C/D)	007	FFCCCCCWWWW(C/D)	008	FCCCCCWWWW(C/D)	009	FCCCCC(C/D)	00A	FFCCCCPPPP(C/D) *	00B	FFCCCCCWWWW(C/D) *	00C	FFCCCC(C/W)WWWW(C/D)	00D	Not Available	00E	Not Available	00F	FFCCCC(C/P)PPPP(C/D)	010	FFCCCCCWWWW(C/D)	011	FFCCCCPPPP(10)(C/D)	012	FFCCCC(C/P)PPPP(10)(C/D)	013	FFCCCC(C/W)WWWW(C/D)
Code	Description																																										
000	REFER																																										
001	FFCCCC(C/P)PPPP(C/D)																																										
002	FFCCCC(C/P)PPPP(C/D)																																										
003	FCCCCC(C/P)PPPP(C/D)																																										
004	FFCCCCPPPP(C/D)																																										
005	FCCCCC(C/P)PPPP(C/D)																																										
006	FFCCCC(C/P)PPPP(C/D)																																										
007	FFCCCCCWWWW(C/D)																																										
008	FCCCCCWWWW(C/D)																																										
009	FCCCCC(C/D)																																										
00A	FFCCCCPPPP(C/D) *																																										
00B	FFCCCCCWWWW(C/D) *																																										
00C	FFCCCC(C/W)WWWW(C/D)																																										
00D	Not Available																																										
00E	Not Available																																										
00F	FFCCCC(C/P)PPPP(C/D)																																										
010	FFCCCCCWWWW(C/D)																																										
011	FFCCCCPPPP(10)(C/D)																																										
012	FFCCCC(C/P)PPPP(10)(C/D)																																										
013	FFCCCC(C/W)WWWW(C/D)																																										


	 The image shows a screen titled 'BARCODE FORMAT' with a date and time display '18-02-2013 (MON) 11:39' and a page number '2/2'. It contains a table with 16 rows, each with a code (014 to 01D) and a barcode. The barcodes are: 014: FCCCCCPCPPPP(C/D), 015: FFFCCCCCPCPPPP(C/D), 016: FCCCCWWWWPPPP(C/D), 017: FFFCCCCCQPPPP(C/D), 018: FIIIIIIIIIIII(C/D), 019: FFFIIIIIIIIII(C/D), 01A: FCCCCCPCPPPP(C/D), 01B: FIIIIIIIIIIII(C/D), 01C: FFFIIIIIIIIII(C/D), 01D: FCCCCCPCPPPP(C/D). There are also two buttons on the right: a right arrow and a yellow triangle.
TRACE ENABLE	Press [YES] or [NO] in this field to select whether or not to enable a traceability function.
DEPARTMENT No.	Press this field to display the Department screen. To set a department, press a desired field on the list, or press the "DEPARTMENT No." field after numerical entry.
GROUP No.	Press this field to display the Group screen. To set a group, press a desired field on the list, or press the "GROUP No." field after numerical entry.

4.3 CAMPAIGN DATA


- 1.** Press the “CAMPAIGN” icon on the menu selection screen.

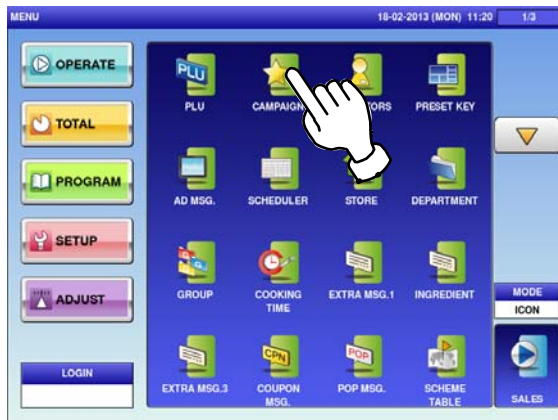


- 2-1** The “Campaign” screen is displayed. To create the first data, press the [NEW] button.

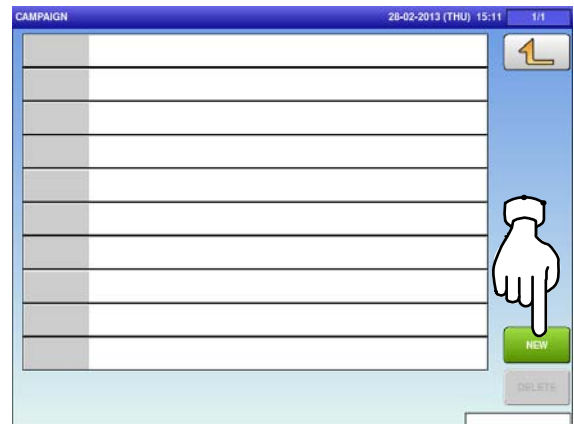

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

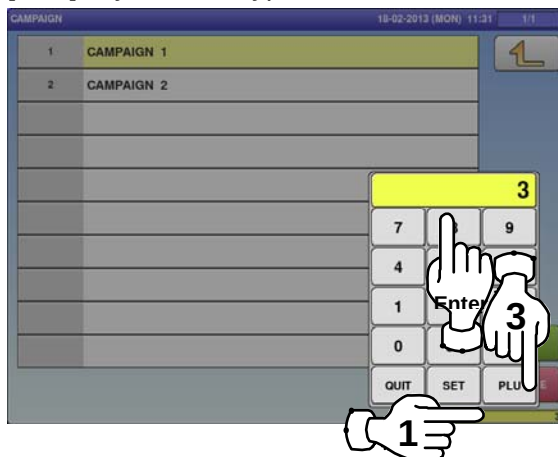


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

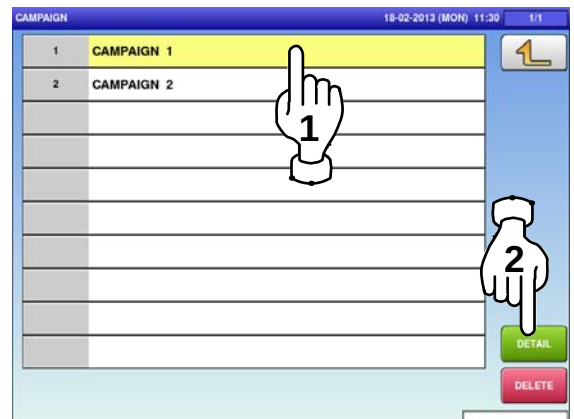


In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

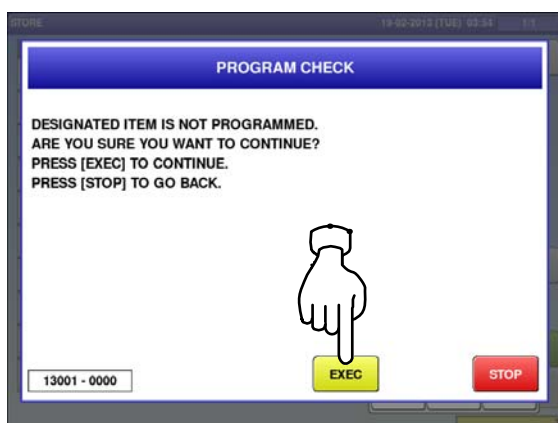

- 4.** The “Campaign / Detail (Data)” screen is displayed. Press the [CALL] button to call up the PLU screen.

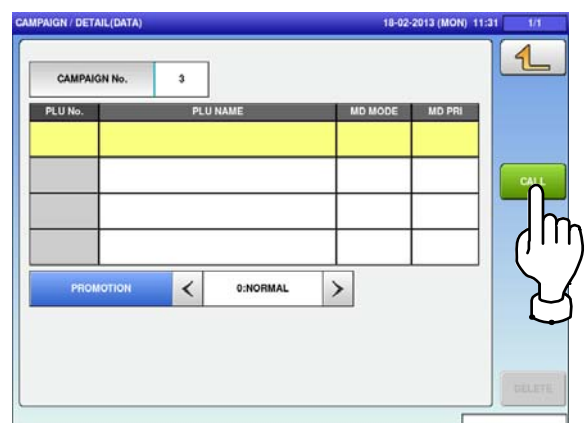

5. The PLU screen is displayed.
Press a desired item field for selection.

PLU	NAME
1	BANANE/BANANA
2	ANANAS/PINEAPPLE
3	RAISIN ROUGE/RED GRAPE
4	POMME ROYALE/APPLE ROYAL
5	KIWI/KIWI
6	ORANGE/ORANGE
7	WATERMELON/WATERMELON
8	CANTALOUPE/CANTALOUPE
9	POIRE/PEAR
10	POMME VERTE/GREEN APPLE

Buttons: SEARCH TEXT, SEARCH, JUMP, DISP LINE 1

6. The designated "Campaign / Detail (Data)" screen is displayed.
Press the "MD MODE" field.

PLU No.	PLU NAME	MD MODE	MD PRI
3	RAISIN ROUGE/RED GRAPE	1:SPECIAL	0.00

Buttons: PROMOTION, <, 0:NORMAL, >, CALL, DELETE

7. The Campaign / Mode List screen is displayed.
Press a desired field for selection.

EXAMPLE Percent discount "-%"

CODE	NAME	UNIT
001	SPECIAL	016 U/P
002	-PRICE	
003	-%	
004	U/P SP.	
005	U/P -PRI	
006	U/P -%	
007	U/P CND.	
011	M.W.ARB.	
012	F.WGT.	
014	MIXED	

Buttons: CALL, DELETE



PLU No.	PLU NAME	MD MODE	MD PRI
3	RAISIN ROUGE/RED GRAPE	3:-%	0.0

Buttons: PROMOTION, <, 0:NORMAL, >, CALL, DELETE

8. Press the "MD PRI" field to display the keypad on the screen.
Enter a numerical value and press the [SET] key on the key pad.

EXAMPLE 10%

PLU No.	PLU NAME	MD MODE	MD PRI
3	RAISIN ROUGE/RED GRAPE	3:-%	0.0

Buttons: PROMOTION, <, 0:NORMAL, >, SET, PLU

Keypad: 100, 9, 8, 7, 6, 5, 4, 3, 2, 1, 0, 00, CLR


4.4 OPERator data

1. Press the “OPERATORS” icon on the menu selection screen.




2. The “Operator” screen is displayed. To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.


EXAMPLE Operator No.13

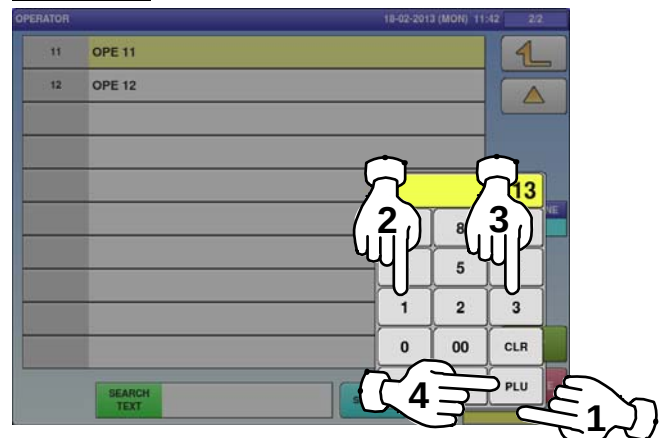

3. To change existing data, press a desired field for selection and then the [DETAIL] button.

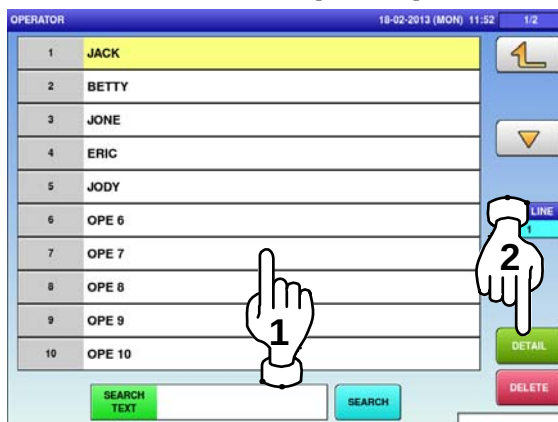


4. If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

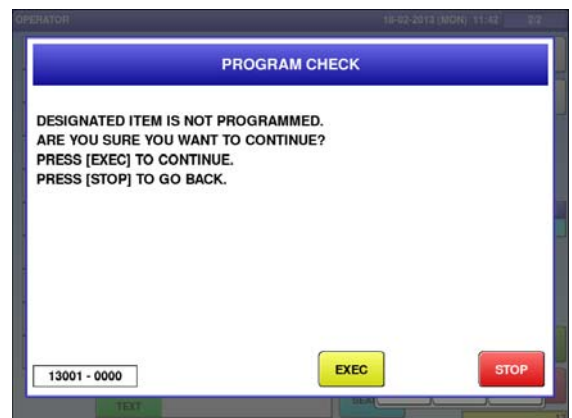

5. The “Operator / Detail” screen is displayed. To register the operator name, press the name field.

6. The Operator / Detail Edit screen is displayed for the designated operator number. Edit text according to the procedure described in Appendix “Text Editing”.

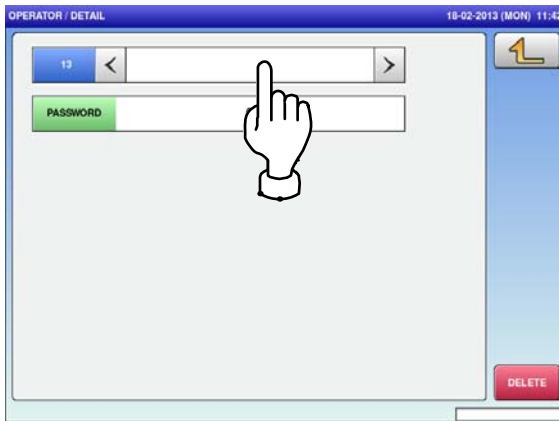


7. To finish the editing, press the Return button.



8.

To set a password, press the Input field at the bottom right of the screen to display the keypad.

Enter the 4-digit numerical value and press the [SET] key on the keypad, and then press the "PASSWORD" field.

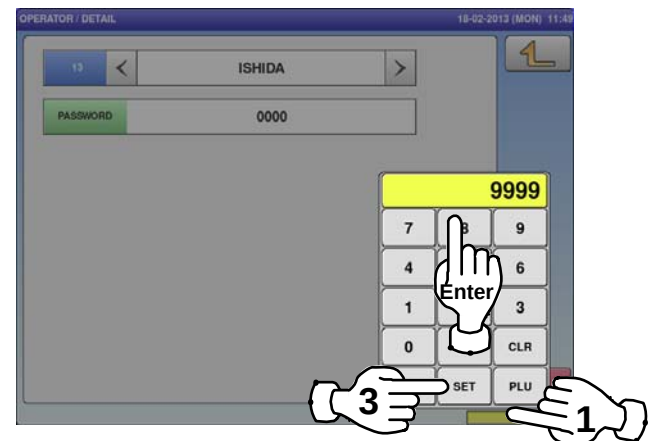


9. Press the Return button to finish the editing.



10.

The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

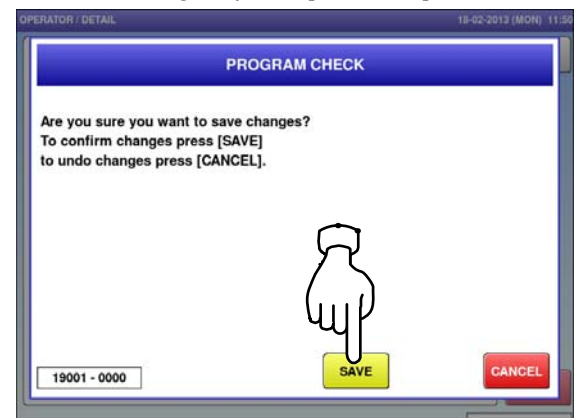

11.

The edited data has been registered.

OPERATOR		18-02-2013 (MON) 11:50	2/2
11	OPE 11		
12	OPE 12		
13	ISHIDA		

DISP LINE
1

DETAIL


DELETE

SEARCH TEXT SEARCH


4.5 PRESET KEY REGISTRATION

4.5.1 SETTING PRESET GROUPS AND PAGES


1. Press the "PRESET KEY" icon on the menu selection screen.

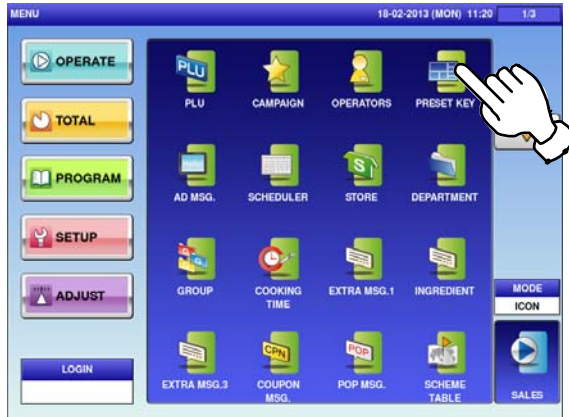


2. The Preset Key screen is displayed. Press a desired field for selection, and press the [DETAIL] button.

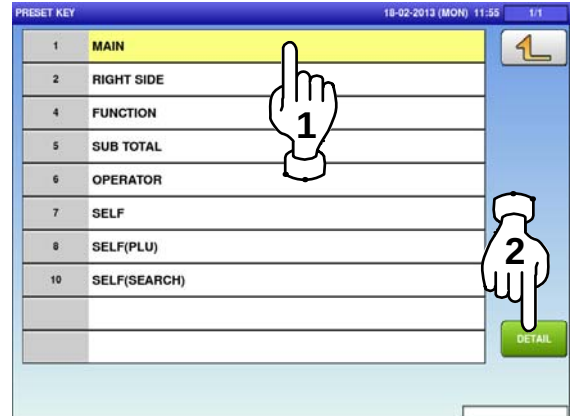

3. The edit screen is displayed. Press [<] or [>] to select the group or page number.

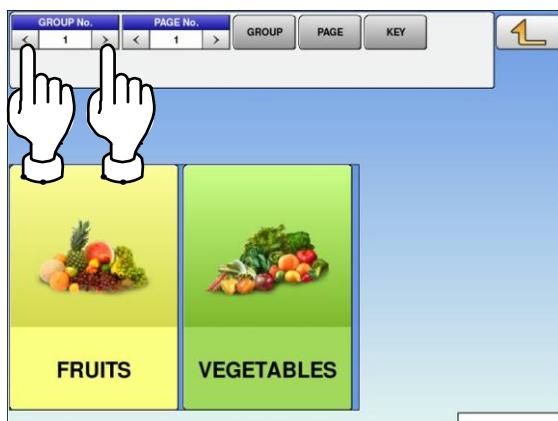


4. To create or delete the group or the page, press the [GROUP] or [PAGE] button, and then press a desired function button as shown below.

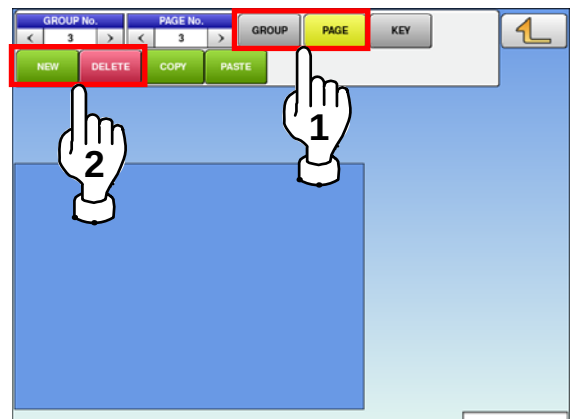


4.5.2 SETTING PRESET KEYS


1. Press the "PRESET KEY" icon on the menu selection screen.

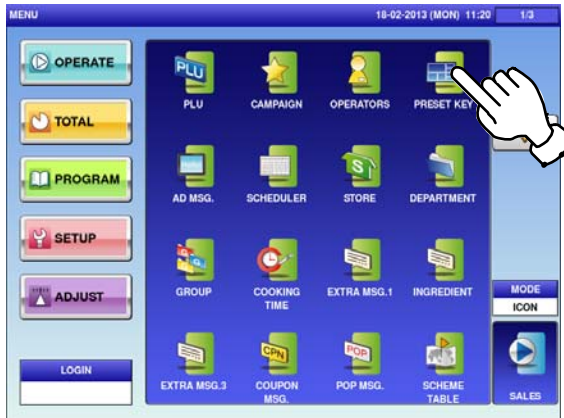

2. The "Preset Key" screen is displayed. Press a desired field for selection, and press the [DETAIL] button.

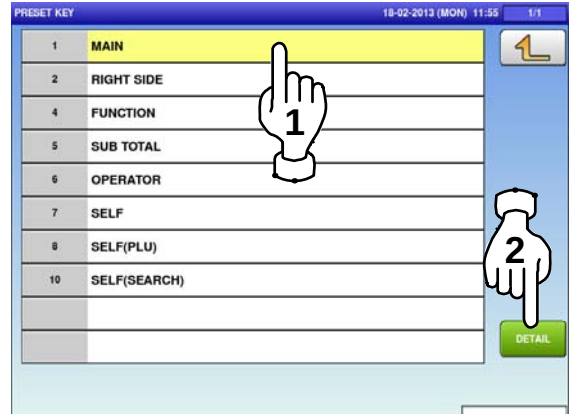

3. Select the group and the page where you want to add the preset key, and then press the [KEY] button and then [NEW] button.

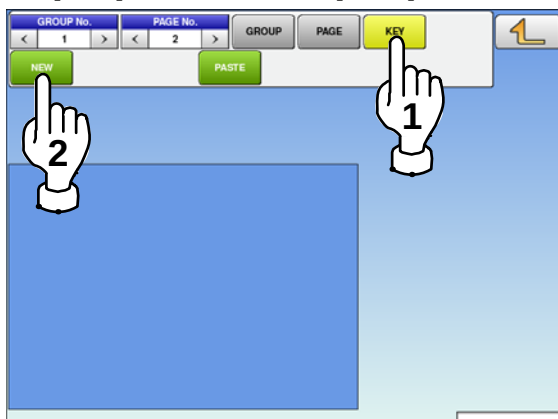

Available preset keys are listed on the screen. To turn pages, press [▼] or [▲].





FUNCTION				18-02-2013 (MON) 12:26	4/6
77	1/2	112	MEMORY		
78	TOTAL ADD	117	AUTO PLU		
79	TRACE.	121	0		
80	PASSPORT	122	1		
93	CSIS ONLINE	123	2		
102	DISTRIB.	124	3		
107	MINCE	125	4		
108	U/P 100g	126	5		
110	00	127	6		
111	.	128	7		



FUNCTION				18-02-2013 (MON) 12:26	5/6
129	8	243	CHANGE LABEL		
130	9	415	PRICE GRP.		
131	PLU CALL	419	PREV. PAGE		
132	LOG IN/OUT	420	NEXT PAGE		
135	PRICE 0	421	JUMP GROUP		
136	LOT No.	422	JUMP PAGE		
137	PRN QTY	423	MOVIE		
143	NUTRITION PRINT	424	FUNCTION		
144	NIP Y/N	432	DISP IMG LD.		
150	ZERO	433	GLOBAL SV.		



FUNCTION				18-02-2013 (MON) 12:26	6/6
435	CAST. SW.				

4.

Press a desired function for selection.

EXAMPLE Selecting the PLU function

FUNCTION				18-02-2013 (MON) 12:25	1/6
0	NONE	10	VOID		
1	PLU	11	COUPON		
2	TARE	15	SUBTOTAL DISPLAY		
3	F/P	16	EXTRA1		
4	MULTI	17	INGREDIENT		
5	SPECIAL	18	EXTRA3		
6	-€	19	FIX PR +WEIGHT		
7	-%	20	SP.(U/P)		
8	SAVE	22	FORMAT 1		
9	POP	23	IMAGE 1		

5.

The PLU screen is displayed.
Press a desired field for selection.**EXAMPLE** PLU No.3

PLU				18-02-2013 (MON) 12:27	1/6
1	BANANE/BANANA				
2	ANANAS/PINEAPPLE				
3	RAISIN ROUGE/RED GRAPE				
4	POMME ROYALE/APPLE ROYAL				
5	KIWI/KIWI				
6	ORANGE/ORANGE				
7	WATERMELON/WATERMELON				
8	CANTALOUPE/CANTALOUPE				
9	POIRE/PEAR				
10	POMME VERTE/GREEN APPLE				


6.

The selected preset key has been assigned.


GROUP No.		PAGE No.		GROUP	PAGE	KEY	
<	1	<	2				
NEW	DELETE	COPY	PASTE	EDIT	SIZE	MOVE	
RAISIN ROUGE RED GRAPE							

4.5.3 CHANGING PRESET KEY SIZES AND POSITIONS


1. Press the "PRESET KEY" icon on the menu selection screen.

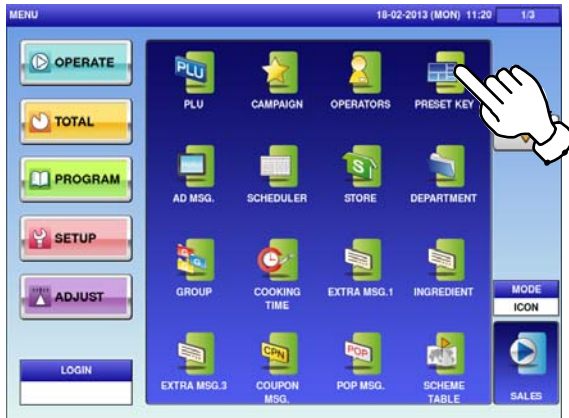


2. The "Preset Key" screen is displayed. Press a desired field for selection, and press the [DETAIL] button.

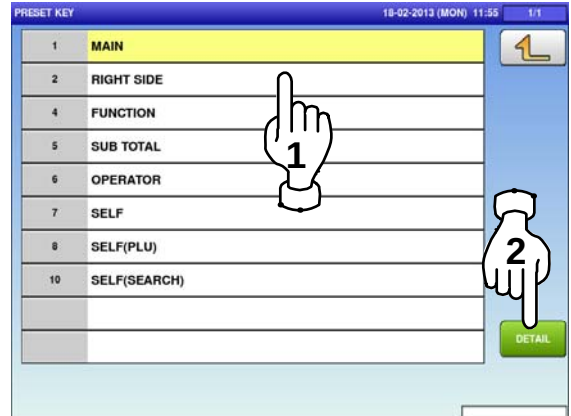


3. Select the group and the page that the preset key you want to edit is located, and then press [KEY] key, desired preset key, and [SIZE] or [MOVE] key.

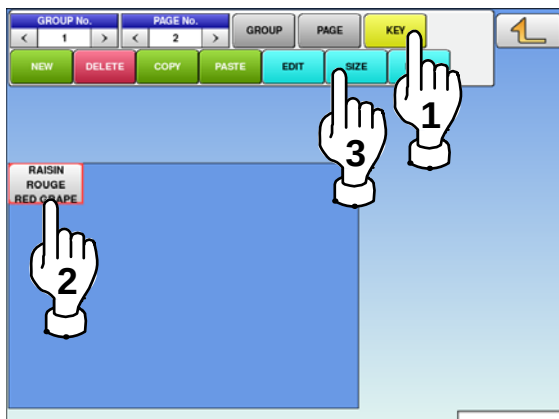


4. The size and position editing screen is displayed.

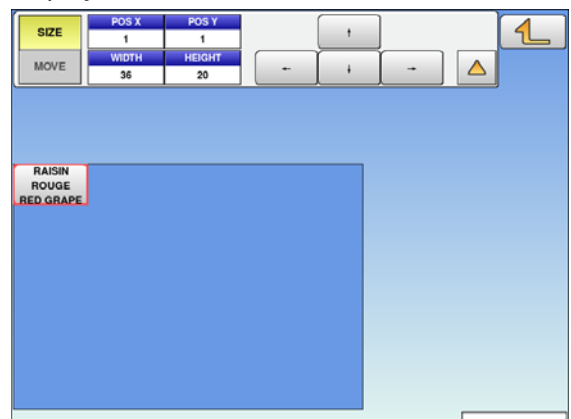

5. Press either the [SIZE] or [MOVE] button.

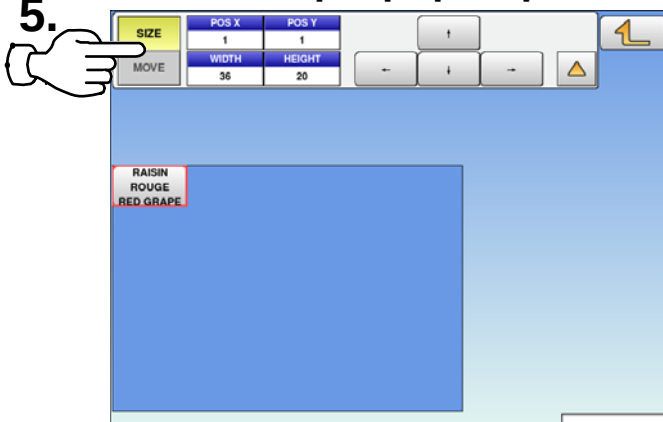


6. Set desired key size and position by using the input fields and arrow buttons, followed by pressing the [SET] key on the keypad.

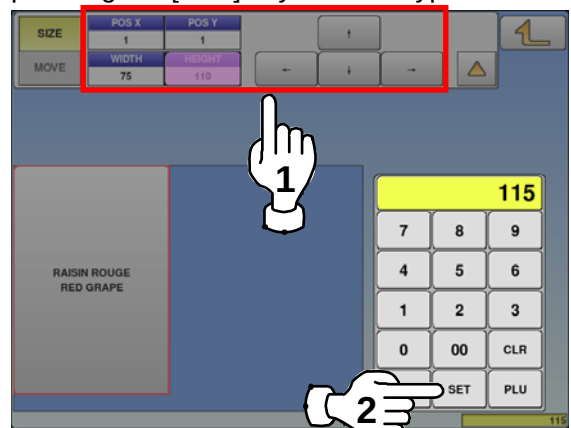


4.5.4 EDITING PRESET KEYS


1. Press the “PRESET KEY” icon on the menu selection screen.

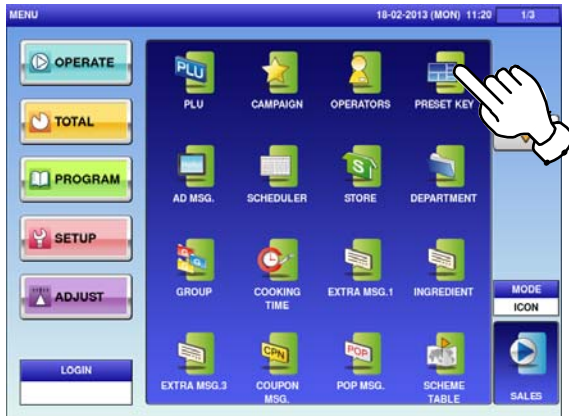


2. The “Preset Key” screen is displayed. Press a desired field for selection, and press the [DETAIL] button.

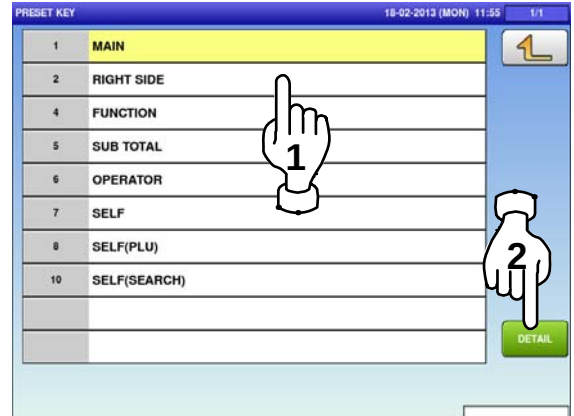


3. Select the group and the page that the preset key you want to edit is located. Then, press the [KEY] button, the preset key, and the [EDIT] button.

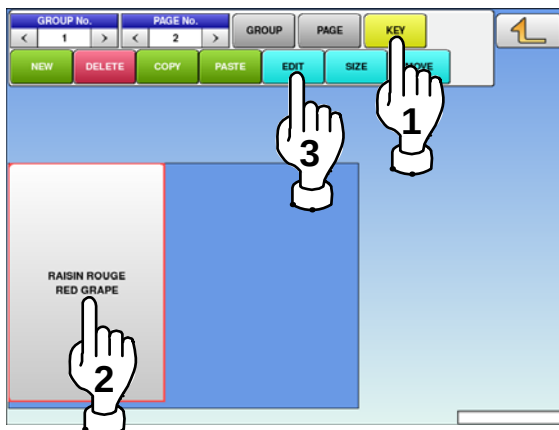


4. The editing screen is displayed.

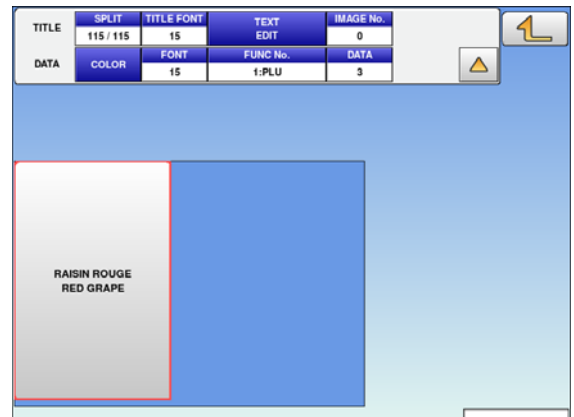


5. To split the preset key display into two portions, press the “SPLIT” field, enter a numerical value, and press the [SET] button on the keypad.

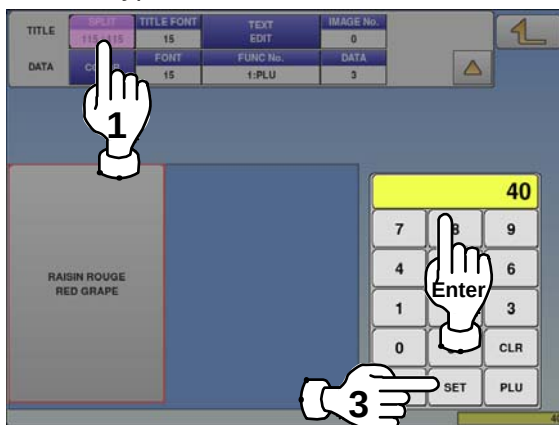


6. The preset key has been split.

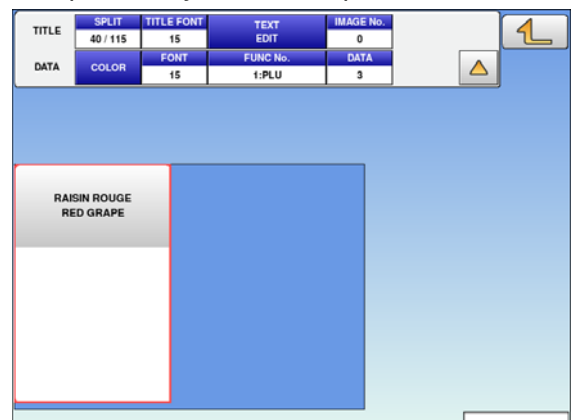


7. To change the font size, press the "TITLE FONT" or "FONT" field, enter a numerical value, and press the [SET] button on the keypad.

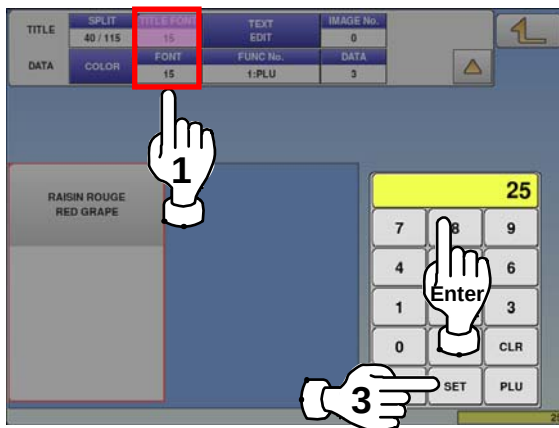

8. The font size has been changed.

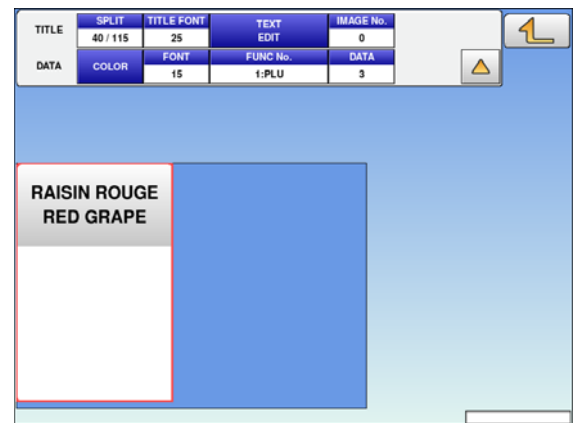

9. To change the preset key title, press the "TEXT EDIT" field.

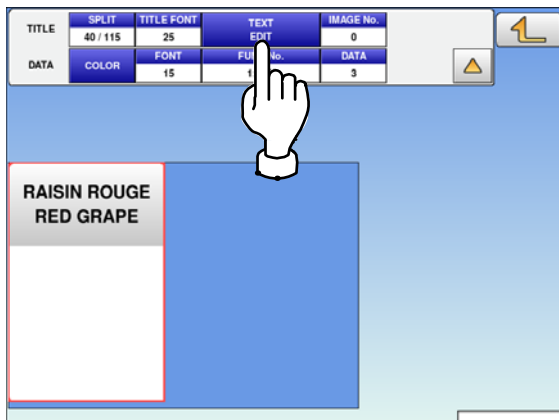


10. The "Preset Key / Name Edit" screen is displayed. Edit text according to the procedure described in Appendix "Text Editing".




11. To finish the editing, press the Return button.



12. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

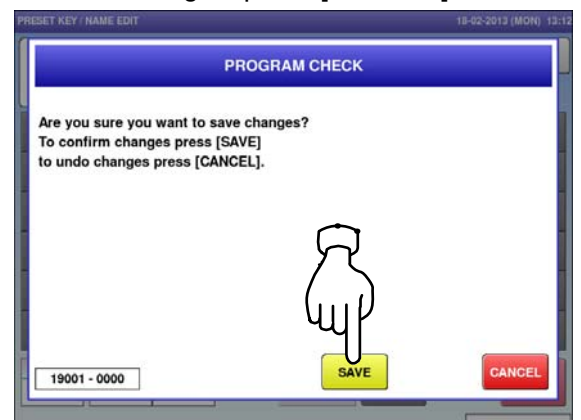

- 13.** To assign a desired image to the preset key, press the "IMAGE No." field.

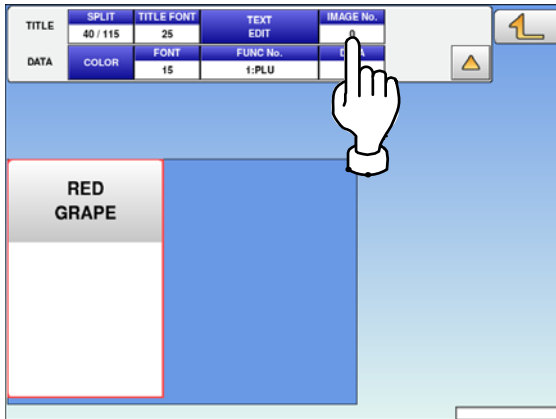


- 14.** The Preset Key / Image screen is displayed. Press a desired image for selection.


Note: To use images stored in the USB memory, press [STORAGE] key. The movie file with the format of MPEG-4, 800 x 600 (SVGA), 10 Mbps, 25 FPS can also be used. Then, press the [SET] button.




- 15.** The image has been assigned.

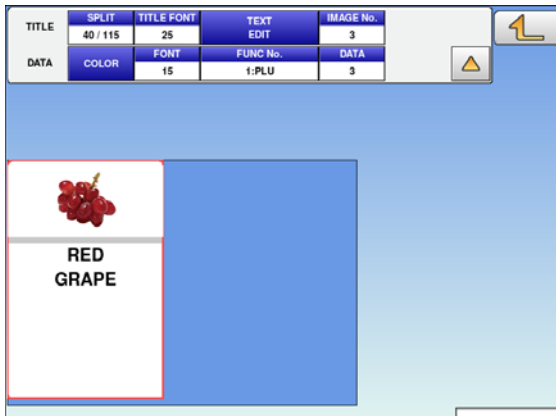


- 16.** To change the color of the preset key, press the [COLOR] button.

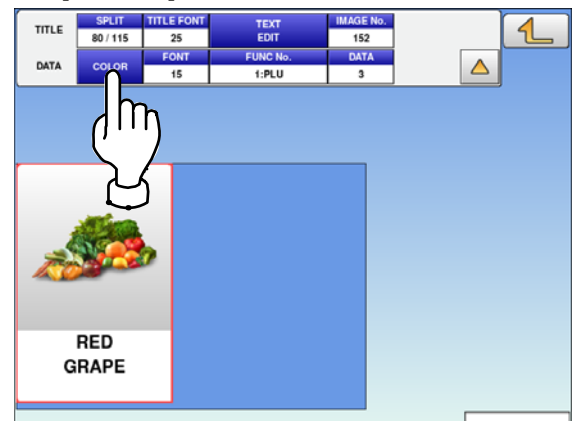


- 17.** The Preset Key / Color screen is displayed.

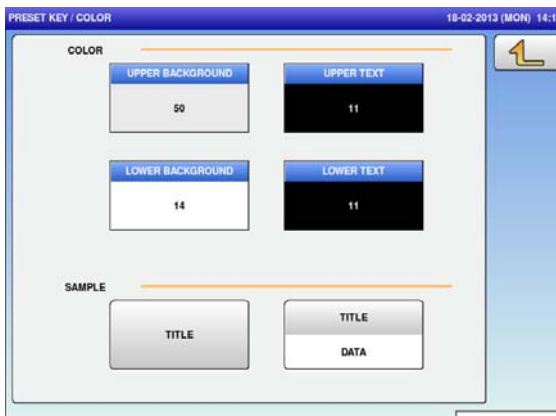

- 18.** To change the background color, press either the "UPPER BACKGROUND" or "LOWER BACKGROUND" field.

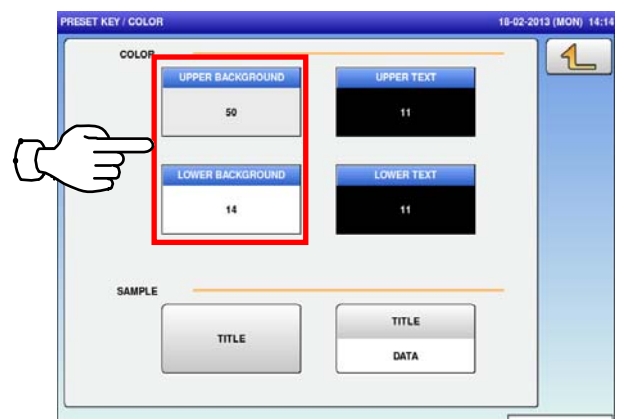


- 19.** Press a desired color for selection.

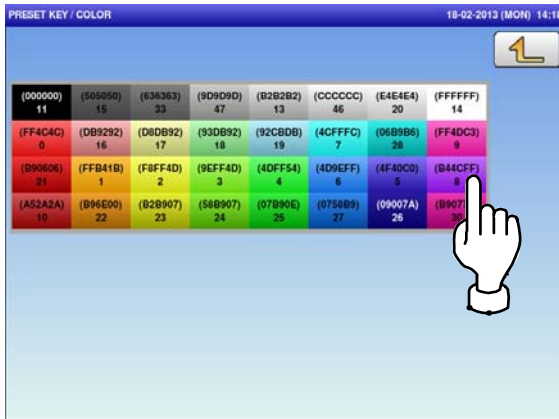


- 20.** The selected color has been applied to the background of the key.



- 21.** To change the font color, press the "UPPER TEXT" or "LOWER TEXT" field.

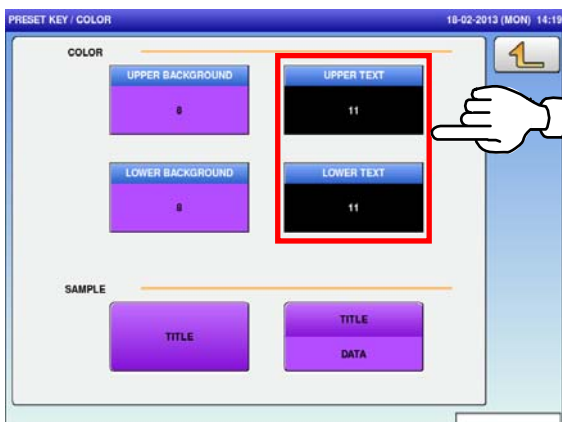


- 22.** Press a desired color for selection.

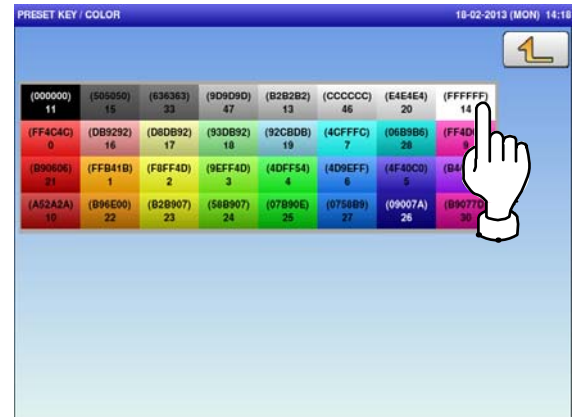


- 23.** The selected color has been applied to the text on the key.




- 24.** To change the preset key operation, press the "FUNC No." field.

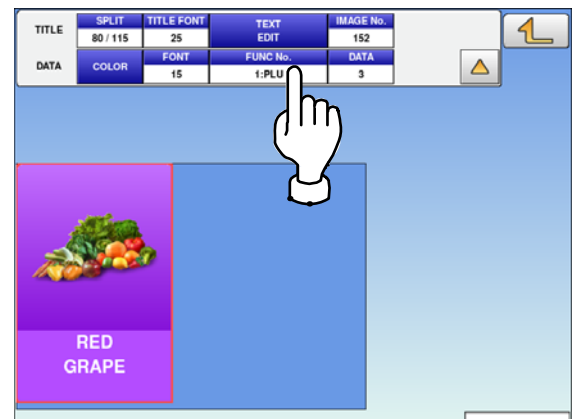

- 25.** Available functions are listed on the screen. Press a desired function for selection.

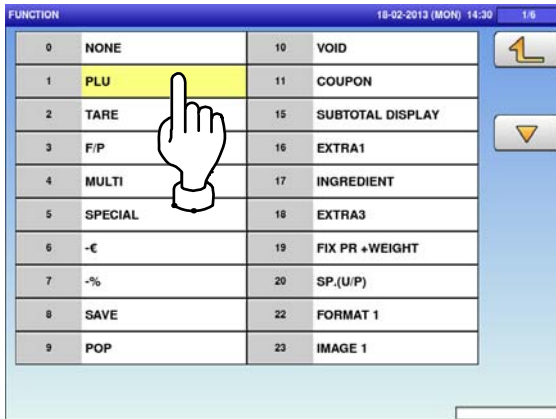


- 26.** To change the PLU number called up by the preset key, press the "DATA" field.

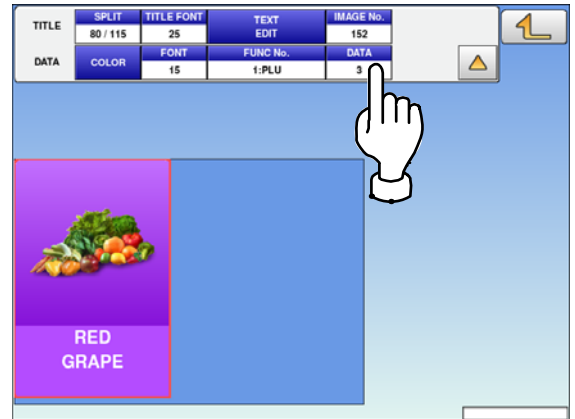


- 27.** The PLU screen is displayed. Then, press a desired field for selection.



- 28.** Upon completion of all settings, press the Return button.

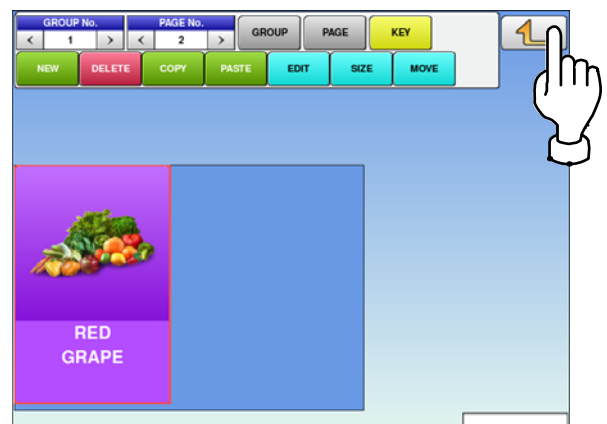


- 29.** The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

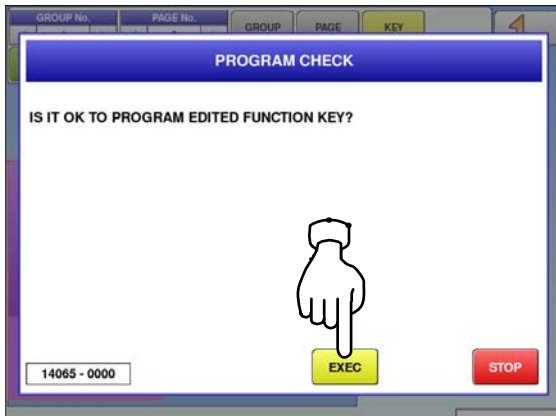


4.5.5 DELETING PRESET KEYS


1. Press the "PRESET KEY" icon on the menu selection screen.

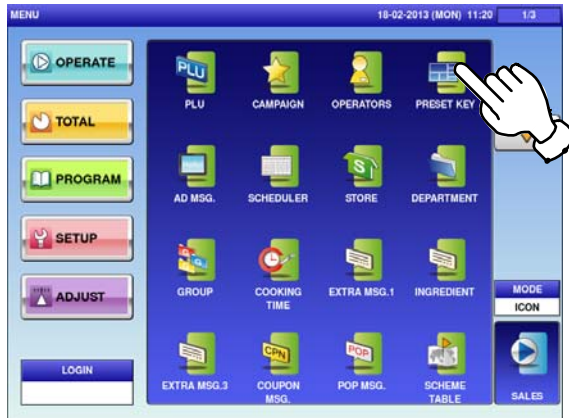

2. The "Preset Key" screen is displayed. Press a desired field for selection, and press the [DETAIL] button.

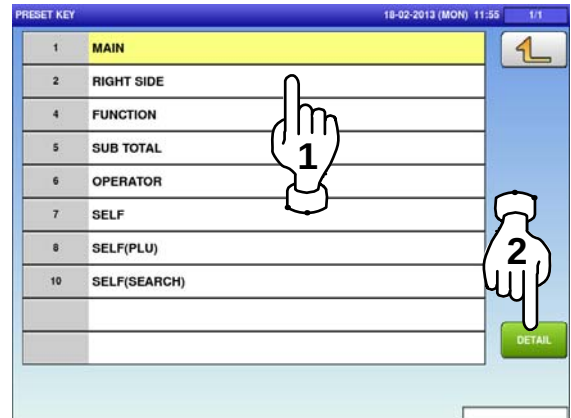

3. Select the group and the page that the preset key you want to delete is located. Then, press the [KEY] button, preset key, and the [DELETE] button.

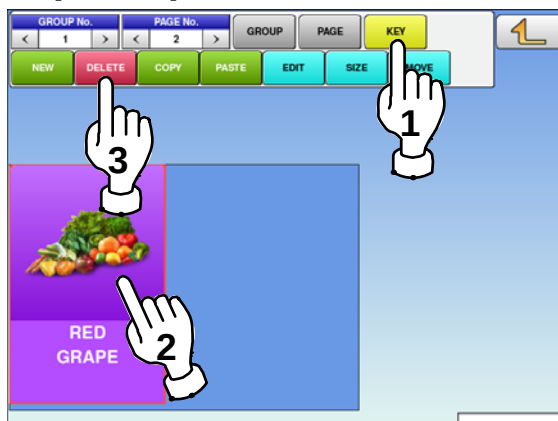


4. The selected key has been deleted.




4.6 ADVERTISEMENT MESSAGES


- 1.** Press the “AD MSG.” icon on the menu selection screen.

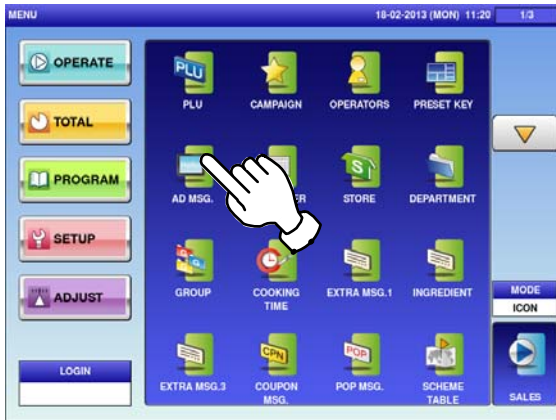


- 2-1** The “Advertisement Message” screen is displayed.
To create the first data, press the [NEW] button.

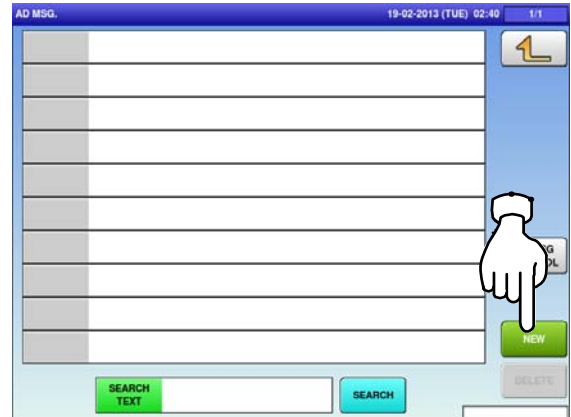

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad.
Then, enter a numerical value and press the [PLU] key on the keypad.

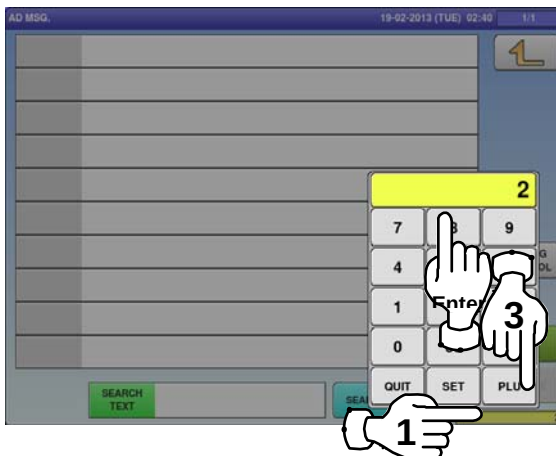


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

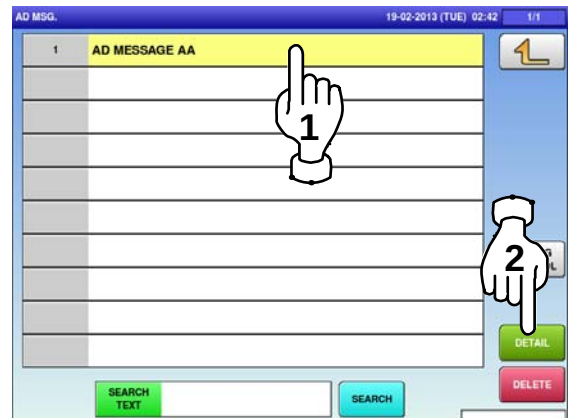


In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed.
Press [EXEC] to continue, or [STOP] to go back.

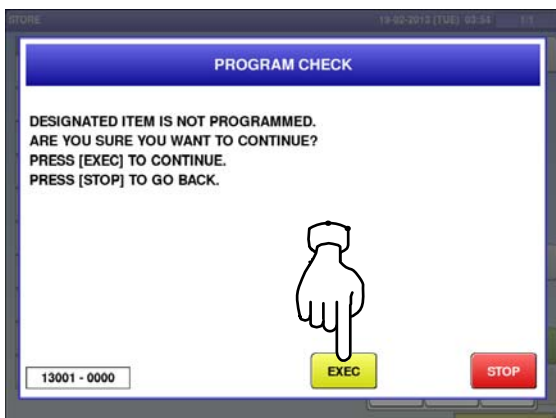

- 4.** The “Advertisement Message / Detail (Text)” screen is displayed.
Press the name field.

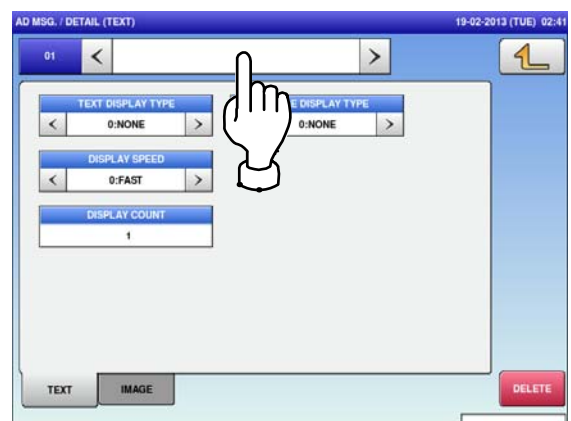


5. The “Advertisement Message / Detail / Edit” screen is displayed.
Edit a desired message according to the procedure described in Appendix “Text Editing”.



6. To exit the edit mode, press the Return button.



7. The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

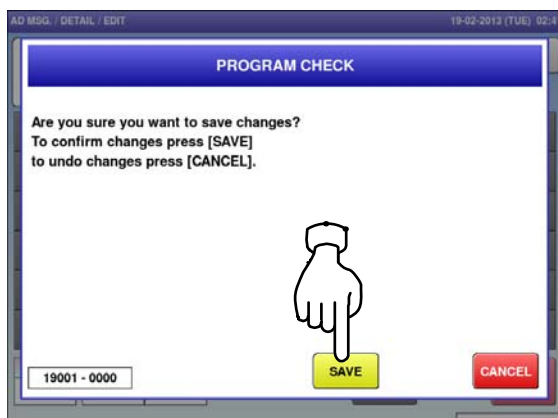

8.

The “Advertisement Message / Detail (Text)” screen is displayed.

AD MSG. / DETAIL (TEXT) 19-02-2013 (TUE) 02:41

01 < AD MESSAGE AA >

TEXT DISPLAY TYPE 0:NONE

IMAGE DISPLAY TYPE 0:NONE


DISPLAY SPEED 0:FAST

DISPLAY COUNT 1

TEXT IMAGE DELETE

ITEM	DESCRIPTIONS
TEXT DISPLAY TYPE	Press [<] or [>] to select a desired display type.
	0: None
	1: Slide
	2: Flash
IMAGE DISPLAY TYPE	Press [<] or [>] to select a desired display type.
	0: None
	1: Slide
	2: Flash
TEXT DISPLAY SPEED	Press [<] or [>] to select a desired display speed.
	0: Fast
	1: Medium
	2: Slow
DISPLAY COUNT	Enter a display count data and press this field.


9. Press the “IMAGE” tab to display the “Advertisement Message / Detail (Image)” screen.

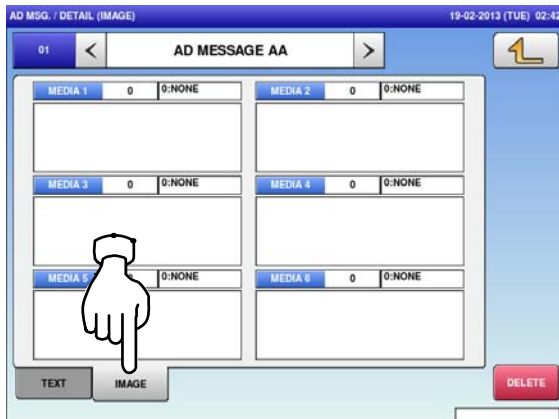


10. Press a desired field to display the Image screen.



11. The “Advertisement Message / Image” screen is displayed.
Press a desired image for selection.
Note: To use images stored in the USB memory, press [STORAGE] key. The movie file with the format of MPEG-4, 800 x 600 (SVGA), 10 Mbps, 25 FPS can also be used.
Then, press the [SET] button.

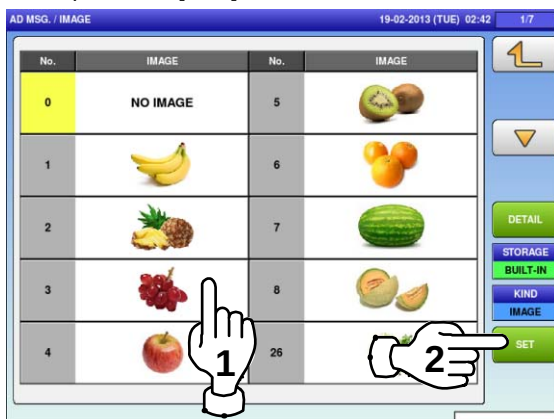


12. The selected image has been assigned in the designated field.

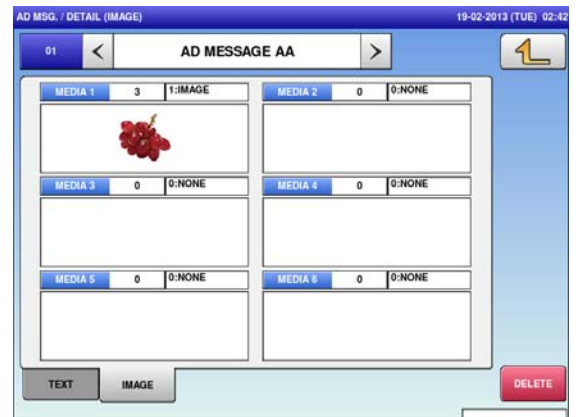


4.7 SCHEDULE DATA


1. Press the “SCHEDULER” icon on the menu selection screen.

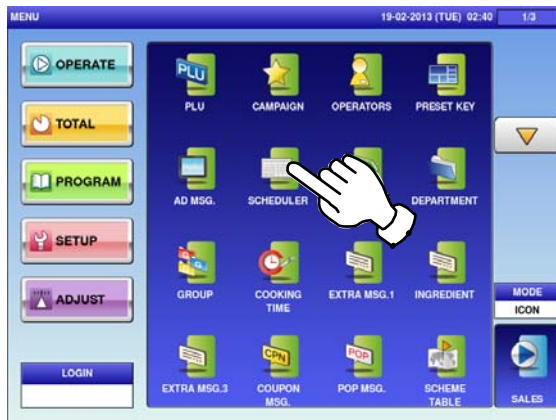

- 2-1 To call up a desired data number, press the Input field at the bottom right of the screen to display the keypad. Then, enter a desired numerical value and press the [PLU] key on the keypad.

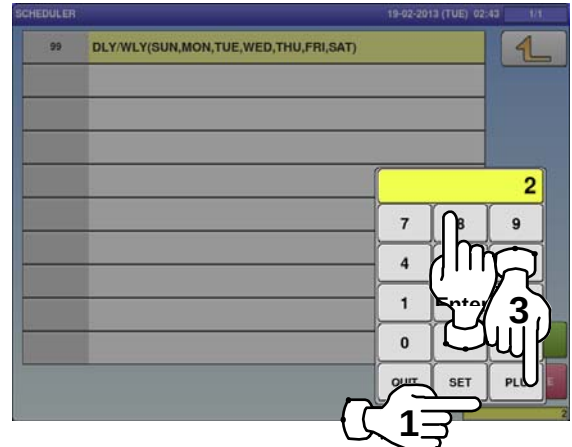


- 2-2 To change existing data, press a desired field for selection and then the [DETAIL] button.

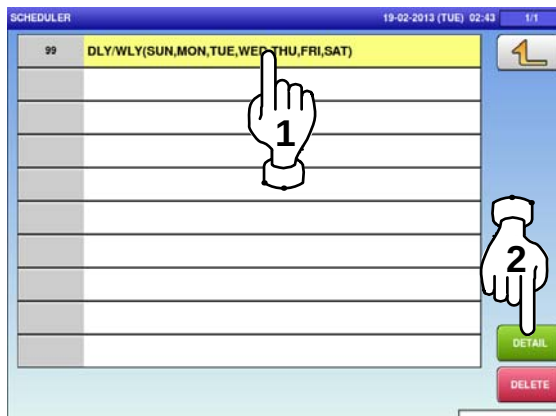


In this case, go to Step 4.

3. If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

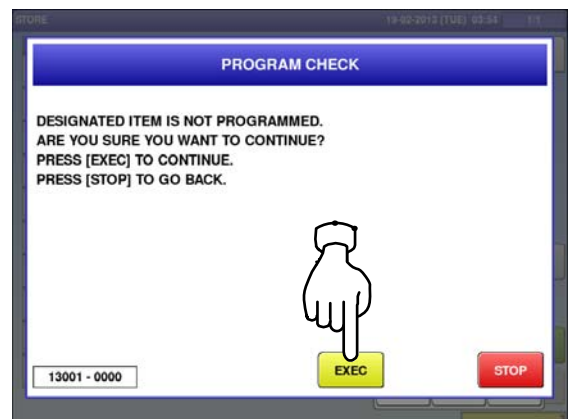


4. The designated Scheduler / Detail (Schedule) screen is displayed. Press [<] or [>] to change the type.

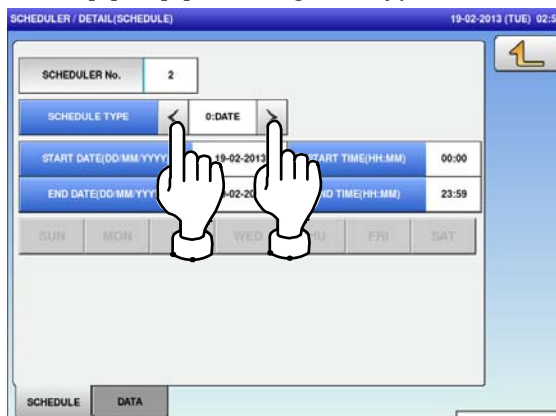


5. To enter the start date, press the “START DATE” field, enter a numerical value, and press the [SET] key on the keypad.

EXAMPLE Start date “June 25, 2013”

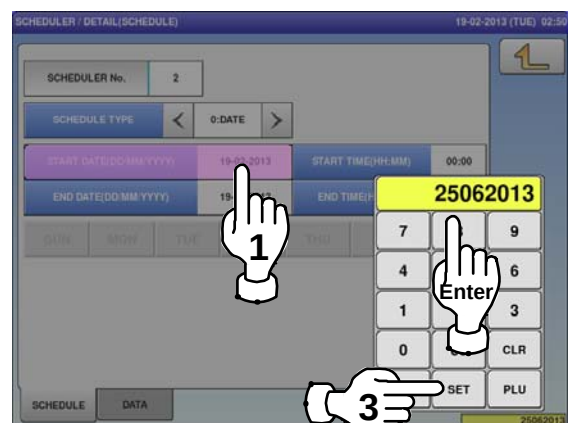


6. To enter the start time, press the “START TIME” field, enter a numerical value, and press the [SET] key on the keypad.

EXAMPLE Start time “08:00”

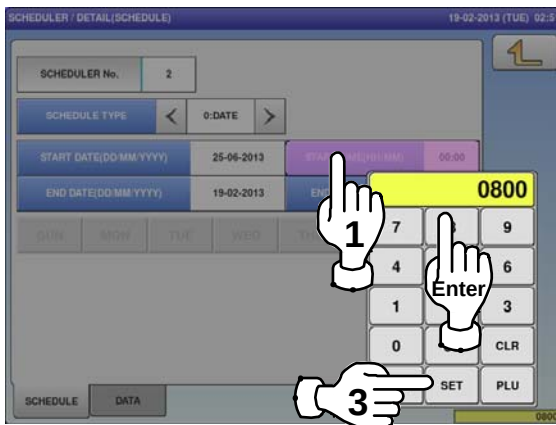


7. To enter the end date, press the “END DATE” field, enter a numerical value, and press the [SET] key on the keypad.

EXAMPLE End date “June 27, 2013”

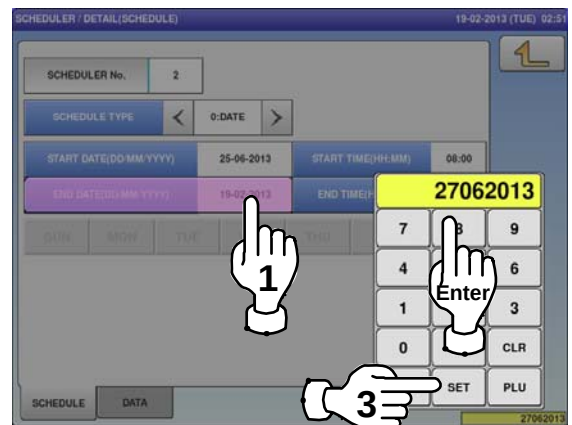


8. To enter the end time, press the “END TIME” field, enter a numerical value, and press the [SET] key on the keypad.

EXAMPLE End time “21:00”

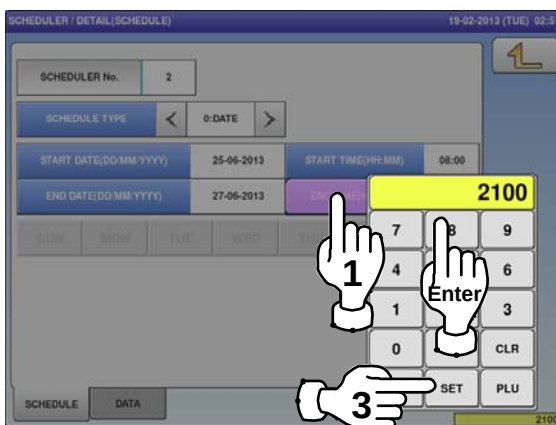

9. When “DLY / WLY” is set in the “SCHEDULE TYPE” field, press a desired day of the week for selection.

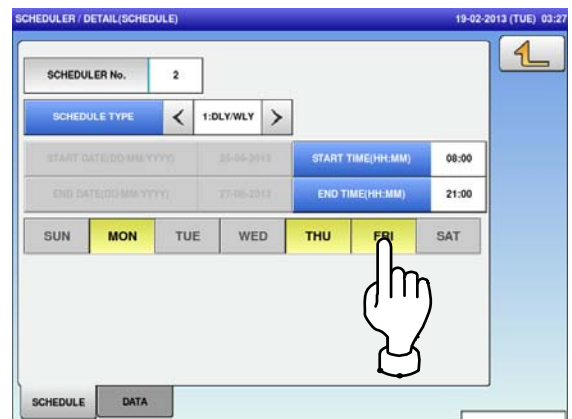

4.8 STORE DATA

- 1.** Press the “STORE” icon on the menu selection screen.



- 2-1** The “Store” screen is displayed. To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.




- 2-2** To change existing data, press a desired field for selection and then the [DETAIL] button.




In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

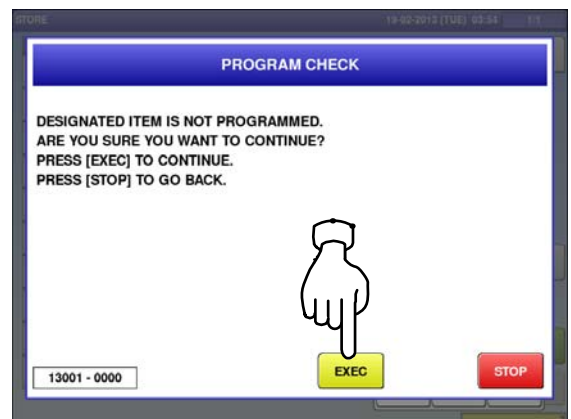

4. The “Store / Detail” screen is displayed. Press the name field.

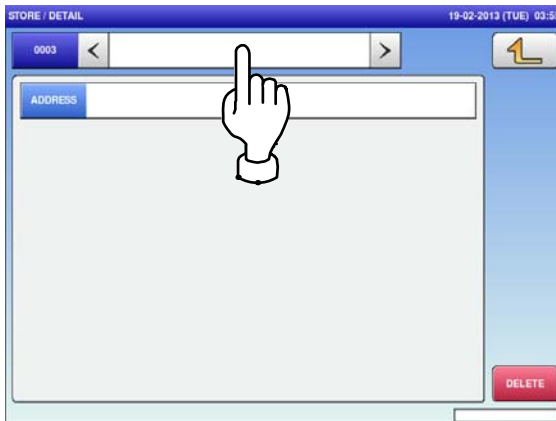


5. The “Store / Name Edit” screen is displayed for the selected store number. Edit text according to the procedure described in Appendix “Text Editing”.




6. Press the Return button to finish the editing.



7. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

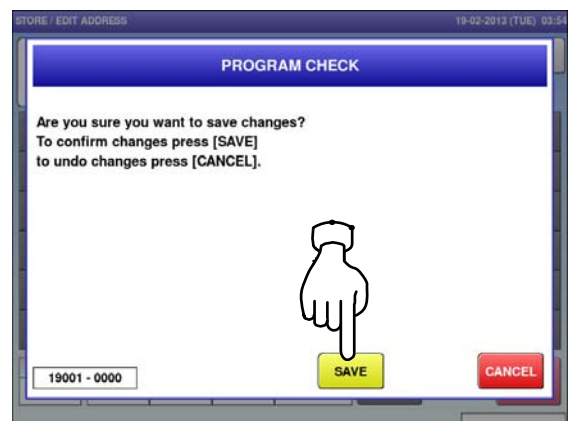

8. The store name has been registered.

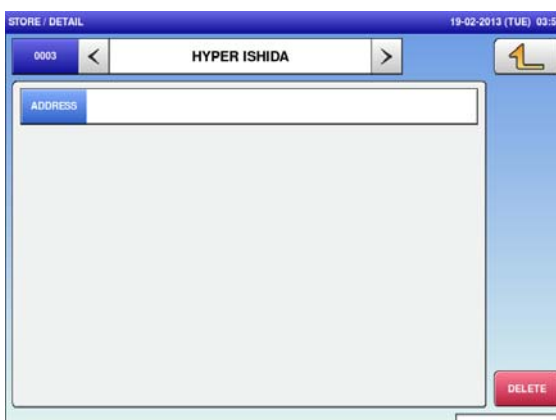

9. To create or change the store address, press the “Address” field.




10. The “Store / Edit Address” screen is displayed.
Edit text according to the procedure described in Appendix “Text Editing”.



11. Press the Return button to finish the editing.



12. The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

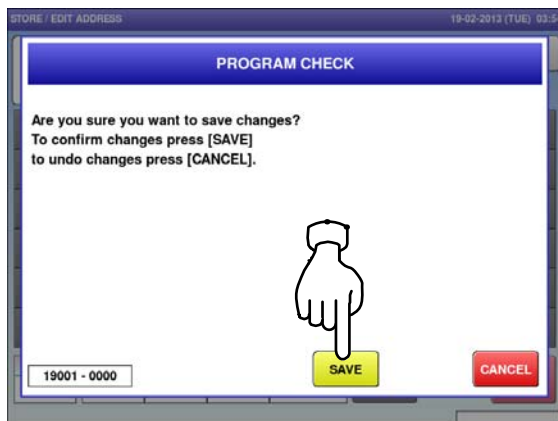


13. The store address has been registered.



4.9 department name data


1.

Press the “DEPARTMENT” icon on the menu selection screen.

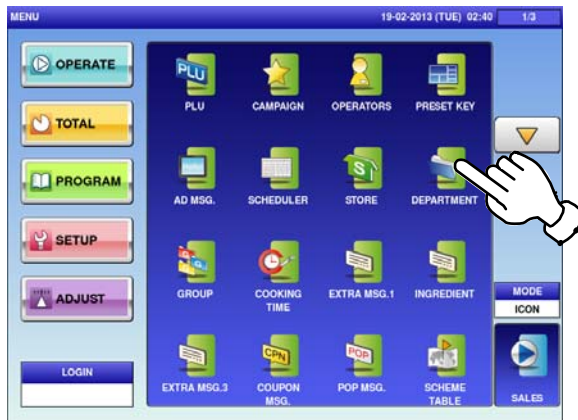


2-1

The “Department” screen is displayed. To create the first data, press the [NEW] button.

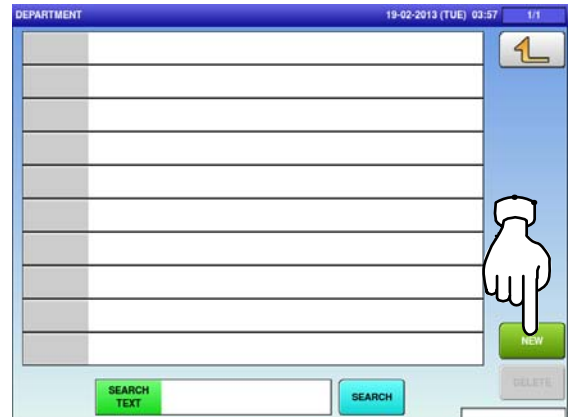


2-2

To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

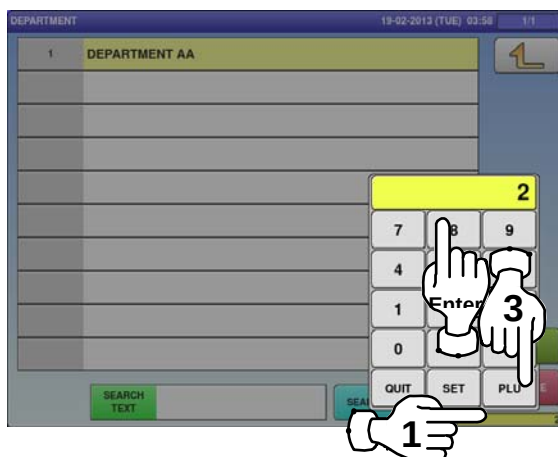

2-3


To change existing data, press a desired field for selection and press the [DETAIL] button.

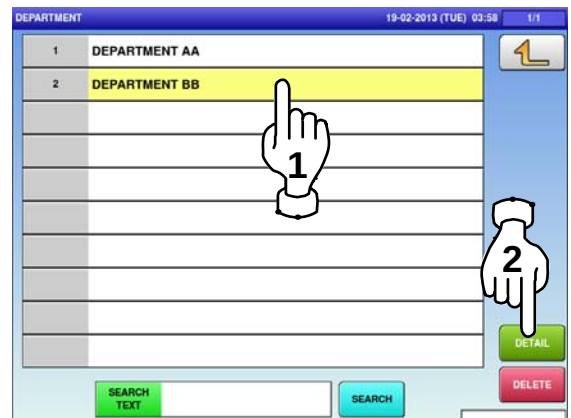

In this case, go to Step 4.

3.

If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

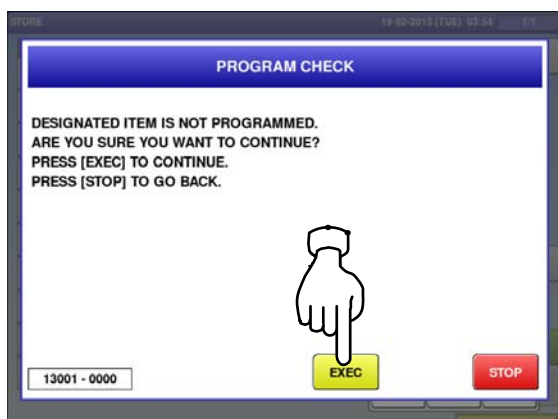

4.

The “Department / Edit” screen is displayed. Edit text according to the procedure described in Appendix “Text Editing”.



5. Press the Return button to finish the editing.

DEPARTMENT / EDIT 19-02-2013 (TUE) 03:57

DEPARTMENT AA

1	2	3	4	5	6	7	8	9
Q	W	E	R	T	Y	U	I	O
A	S	D	F	G	H	J	K	L
	Z	X	C	V	B	N	M	.
Lower Case	#	%	*	&	New Line	Line Delete	Char Delete	Back Space
Shift	Key Page	Under Line	Italic	Normal	Bold	Reverse	←	↓

No.	CHAR	REMAIN	STYLE	FONT	COPY	ERASE
1	013	011	/	30x15/30x15		

6. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

STORE / EDIT ADDRESS 19-02-2013 (TUE) 03:54

PROGRAM CHECK

Are you sure you want to save changes?
To confirm changes press [SAVE]
to undo changes press [CANCEL].

19001 - 0000

SAVE CANCEL

7. The edited data has been registered.

DEPARTMENT 19-02-2013 (TUE) 03:57 1/1

No.	CHAR	REMAIN	STYLE	FONT	COPY	ERASE
1	013	011	/	30x15/30x15		


DEPARTMENT AA

SEARCH TEXT SEARCH


DETAIL DELETE

4.10 group name data


- 1.** Press the "GROUP" icon on the menu selection screen.

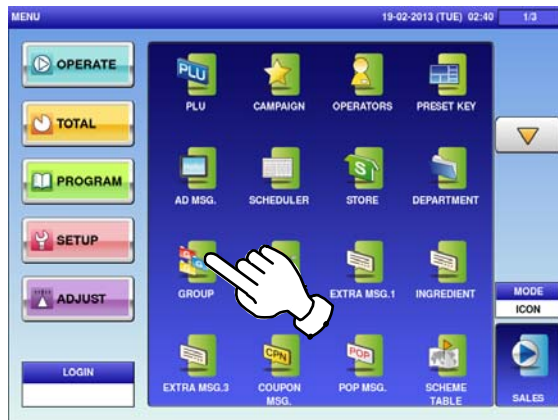


- 2-1** The "Group" screen is displayed. To create the first data, press the [NEW] button.

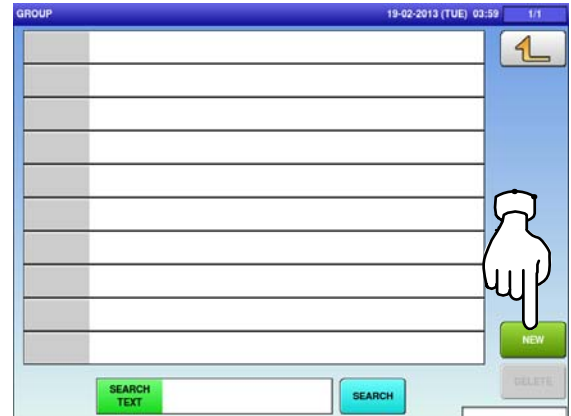

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

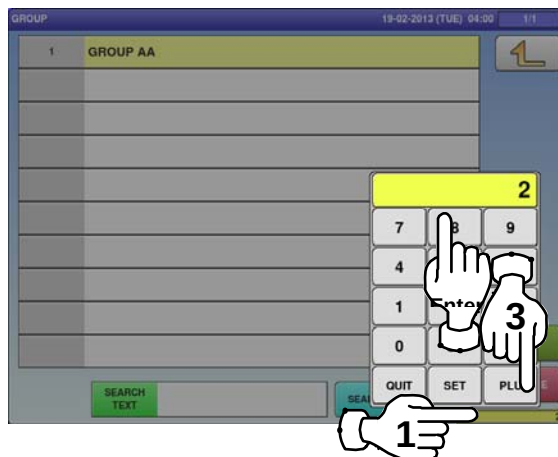


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

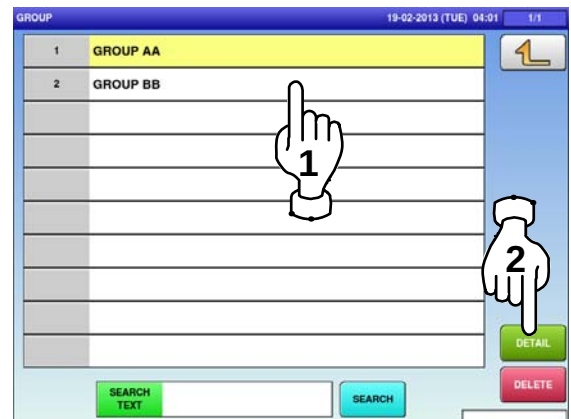

In this case, go to Step 4.


- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

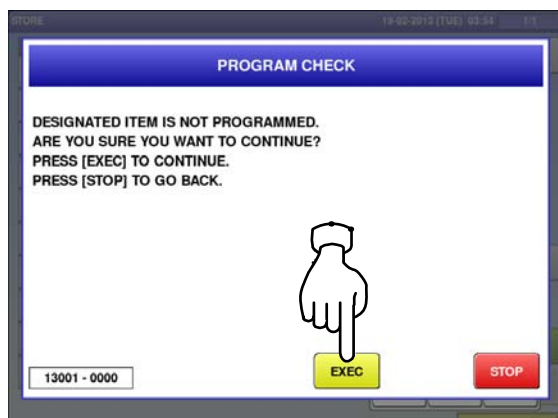


- 4.** The "Group / Edit" screen is displayed. Edit the text according to the procedure described in Appendix "Text Editing".




5. Press the Return button to finalize the edited text.

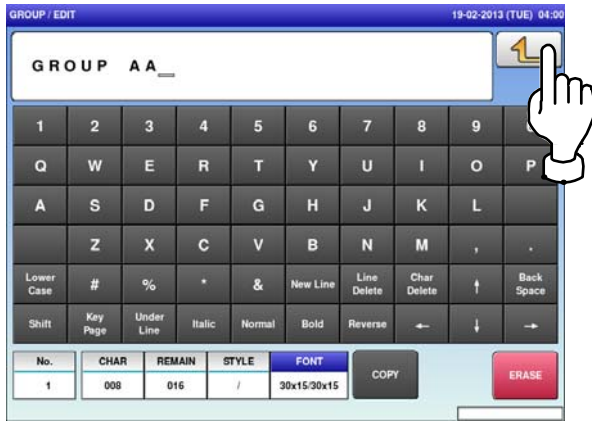

6. The confirmation screen appears. Press [EXEC] to continue, or [STOP] to go back.

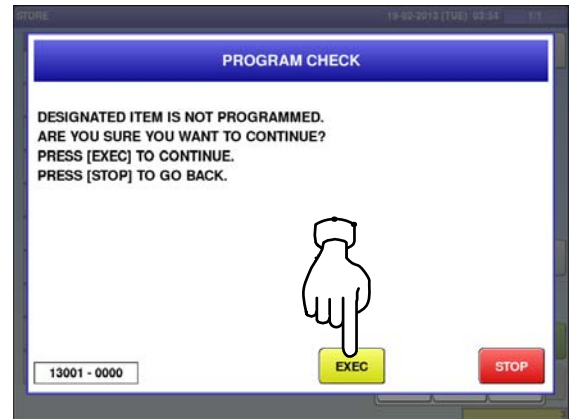


7. The edited data has been registered.

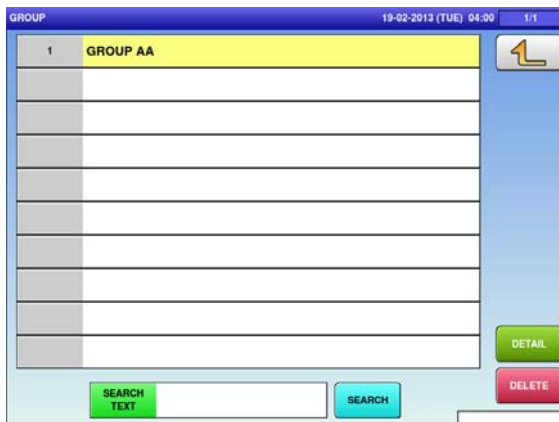


4.11 cooking instruction data


- 1.** Press the “COOKING TIME” icon on the menu selection screen.

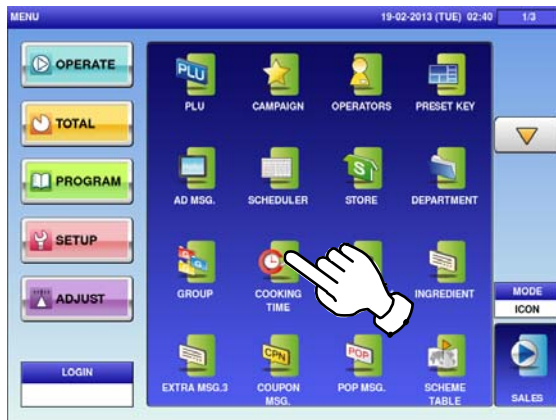


- 2-1** The “Cooking Time” screen is displayed. To create the first data, press the [NEW] button.

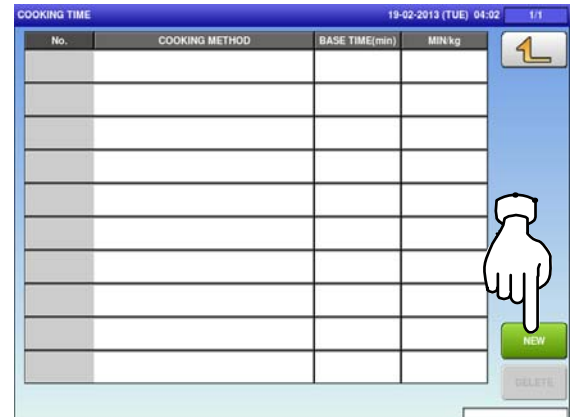

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

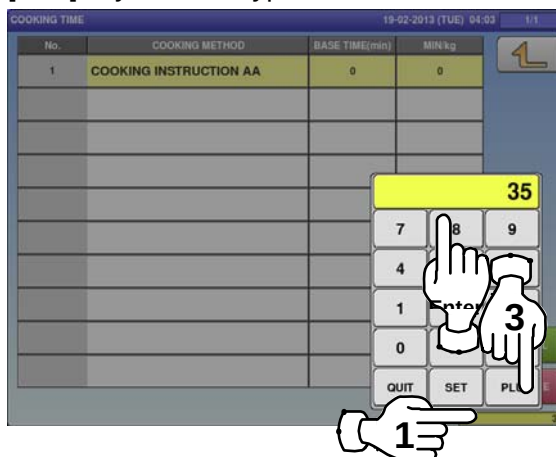


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

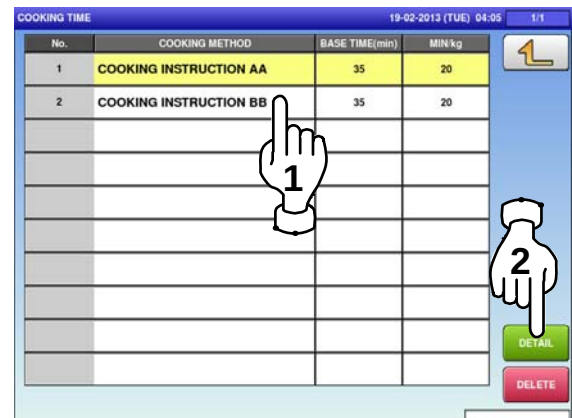

In this case, go to Step 4.


- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

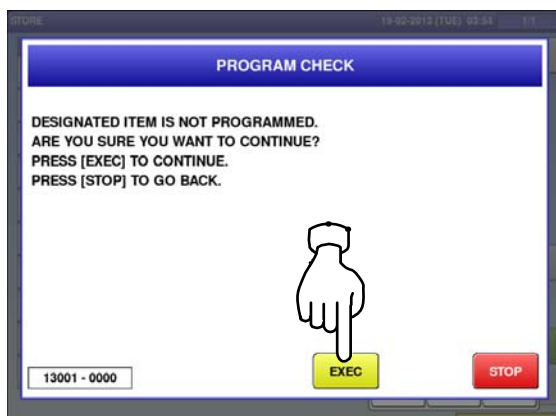


- 4.** The “Cooking Time / Edit” screen is displayed. Edit text according to the procedure described in Appendix “Text Editing”.




5. Press the Return button to finish the editing.

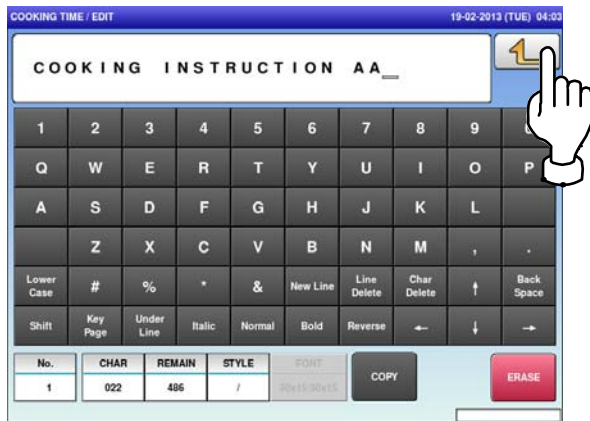


6. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

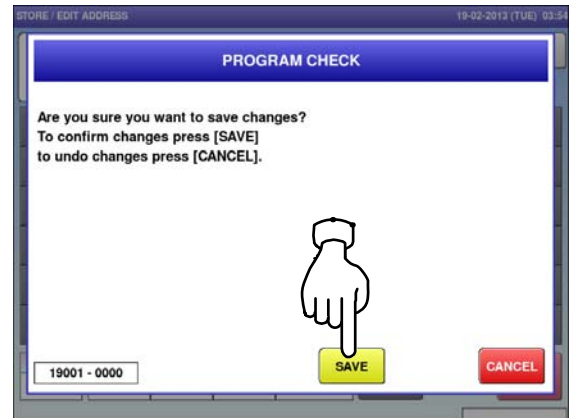


7. The edited data has been registered.

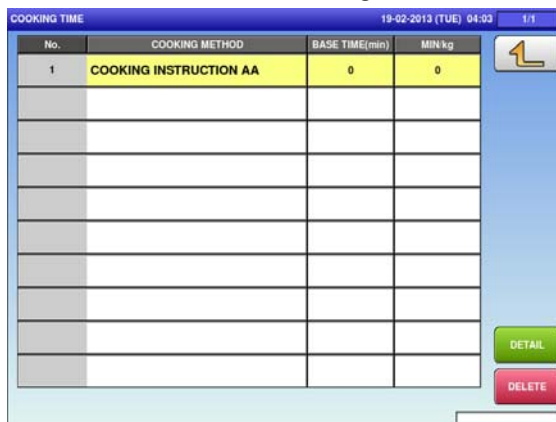

8. Press the Input field at the bottom right of the screen to display the keypad. Enter a numerical value via the keypad and press the applicable field.

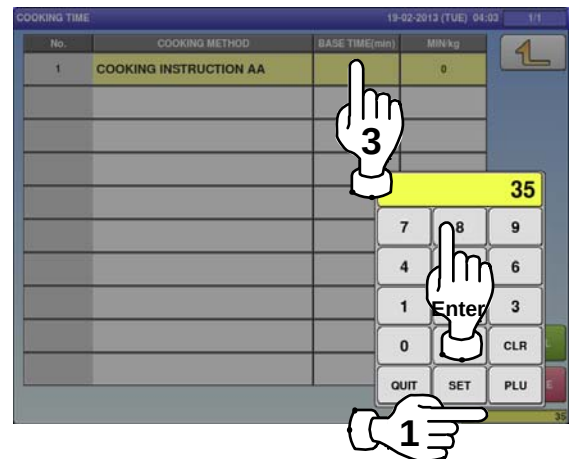


9. The edited data has been registered.

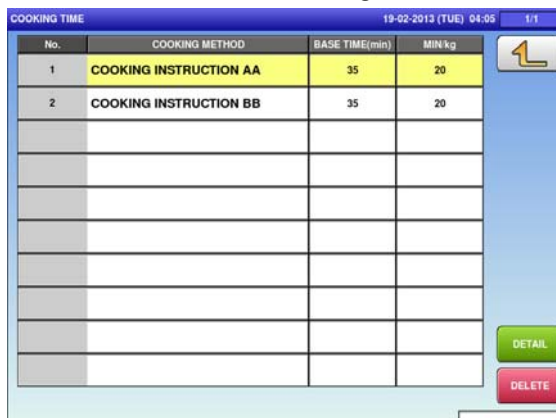


4.12 extra message data


- 1.** Press the “EXTRA MSG.” icon on the menu selection screen.

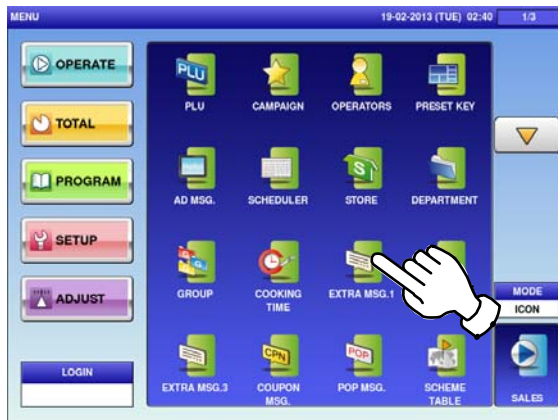


- 2-1** The “Extra Message” screen is displayed. To create the first data, press the [NEW] button.

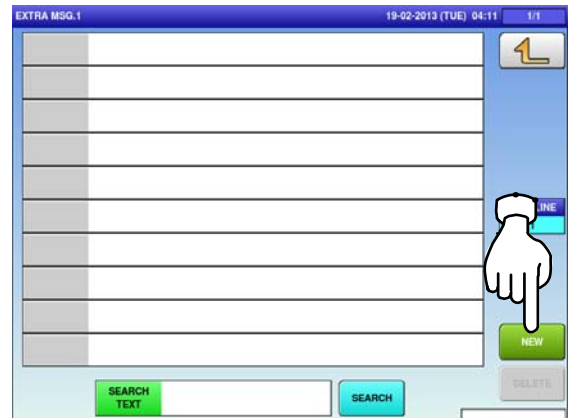

- 2-2** To call up a desired data number, press the Input field at the bottom right of the screen to display the keypad. Then, enter a desired numerical value and press the [PLU] key on the keypad.

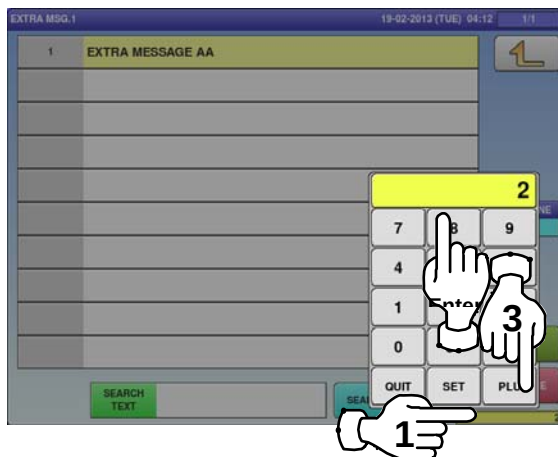


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

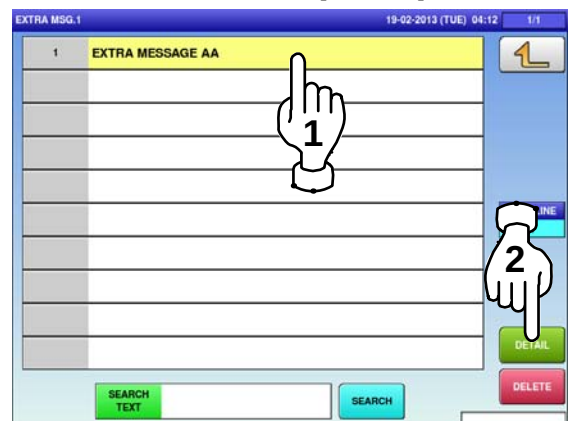

In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

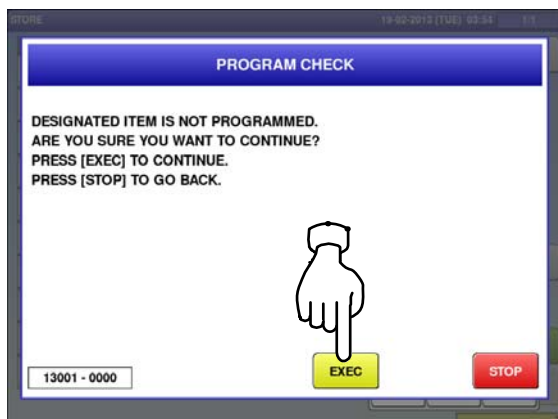

- 4.** The “Extra Message / Edit” screen is displayed. Edit text according to the procedure described in Appendix “Text Editing”.




5. Press the Return button to finish the editing.




6.

The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

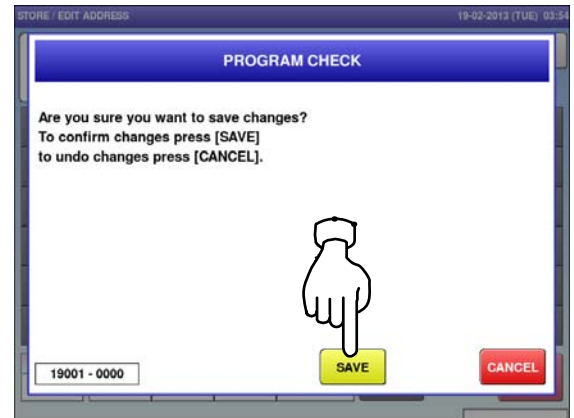


7. The edited data has been registered.

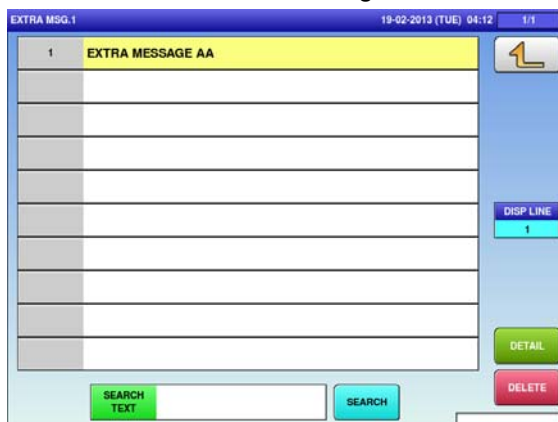


4.13 coupon message data


- 1.** Press the "COUPON MSG." icon on the menu selection screen.

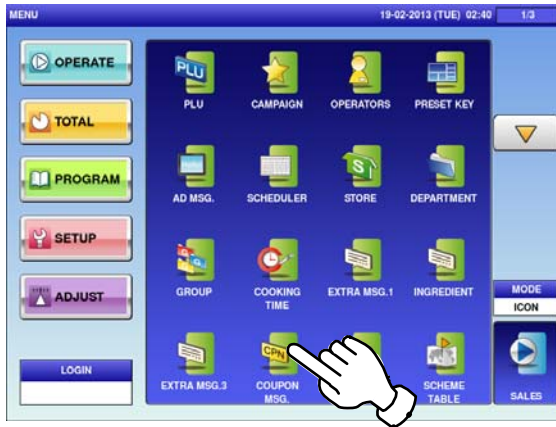

- 2-1** The "Coupon Message" screen is displayed. To create the first data, press the [NEW] button.

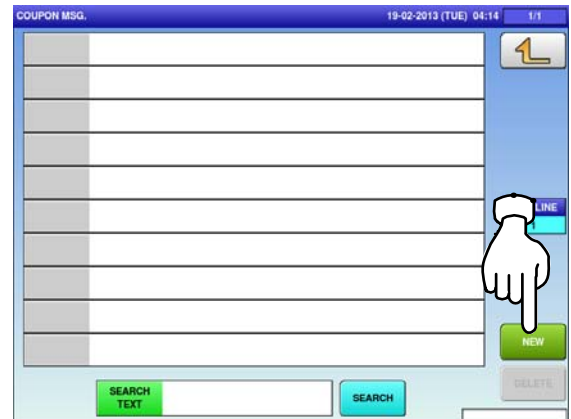

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

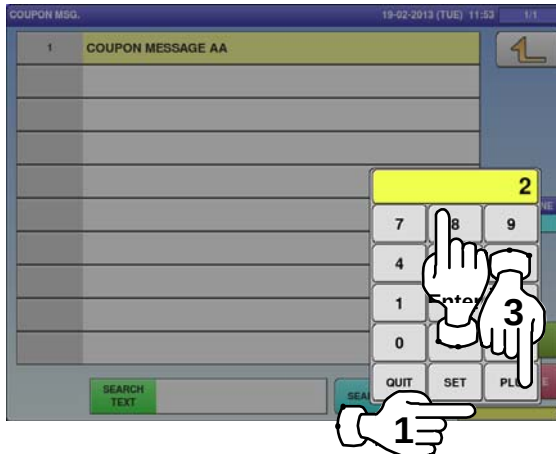


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.



In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.


- 4.** The "Coupon Message / Edit" screen is displayed. Edit text according to the procedure described in Appendix "Text Editing".

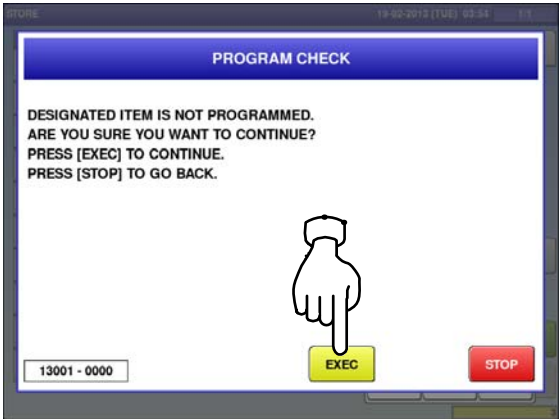

5. Press the Return button to finish the editing.



6. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

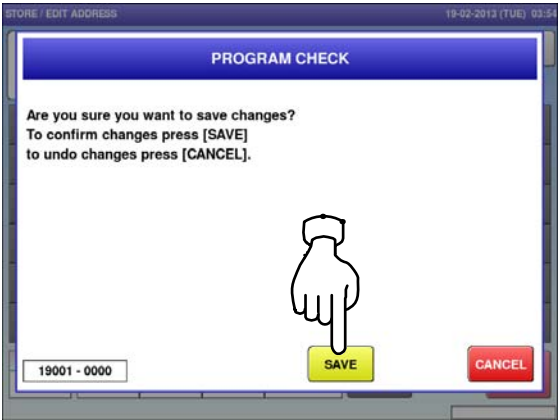


7. The edited data has been registered.




4.14 pop message data


- 1.** Press the “POP MSG.” icon on the menu selection screen.

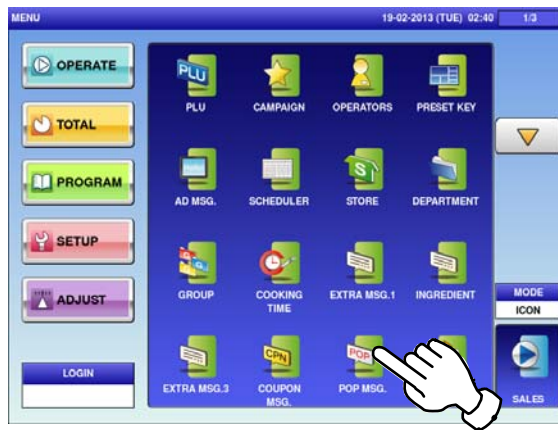


- 2-1** The “POP Message” screen is displayed. To create the first data, press the [NEW] button.

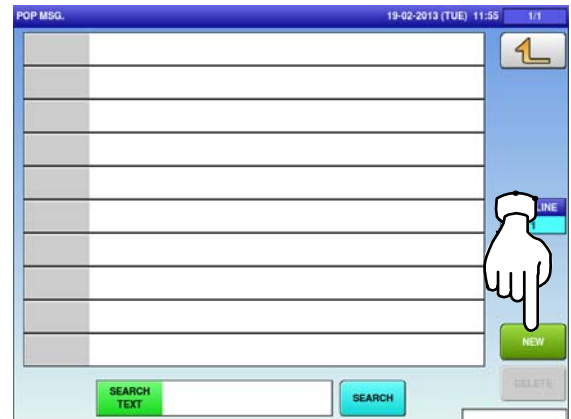

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

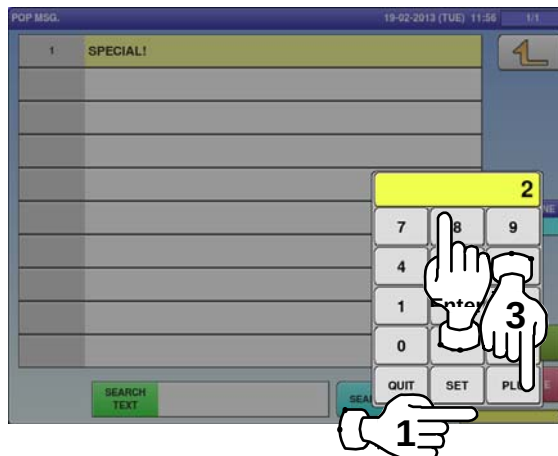


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

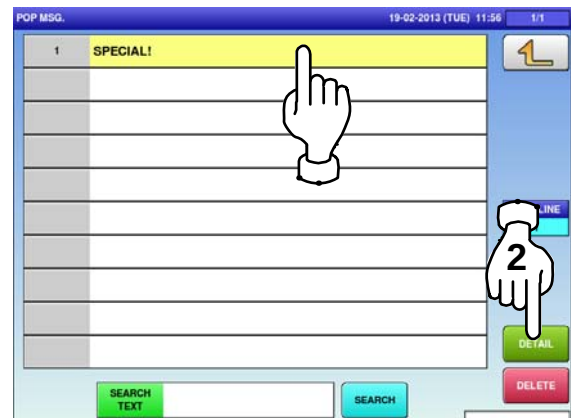

In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.


- 4.** The “POP Message / Edit” screen is displayed. Edit text according to the procedure described in Appendix “Text Editing”.

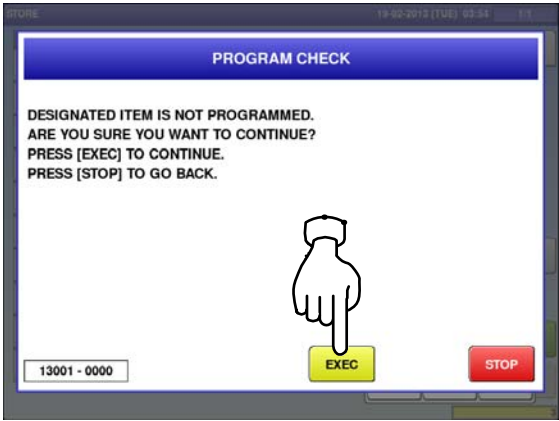


5. Press the Return button to finish the editing.



6. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

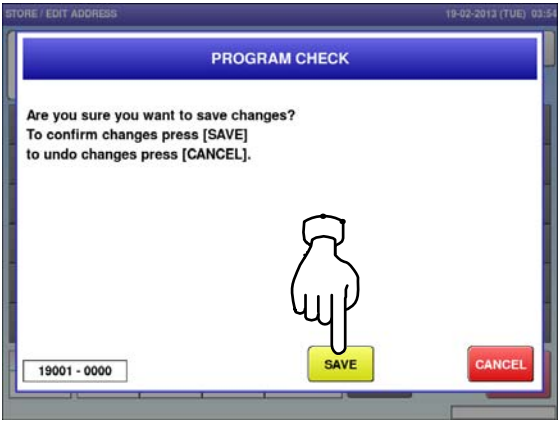


7. The edited data has been registered.

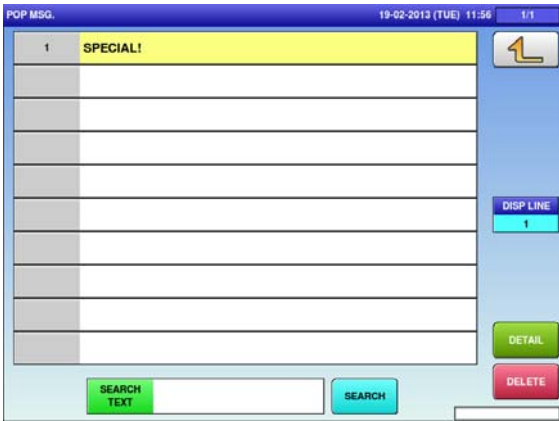


4.15 scheme table data


- 1.** Press the "SCHEME TABLE" icon on the menu selection screen.

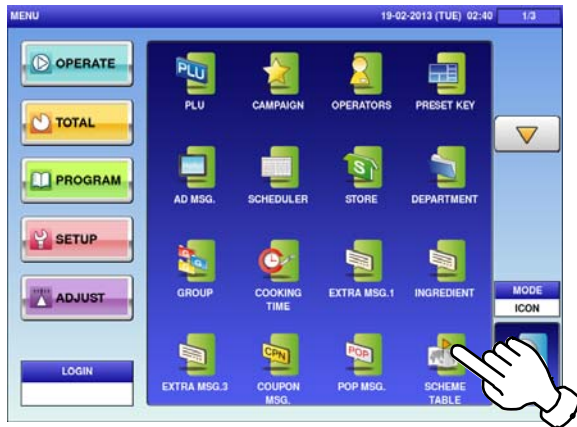


- 2-1** The "Scheme Table" screen is displayed. To create the first data, press the [NEW] button.

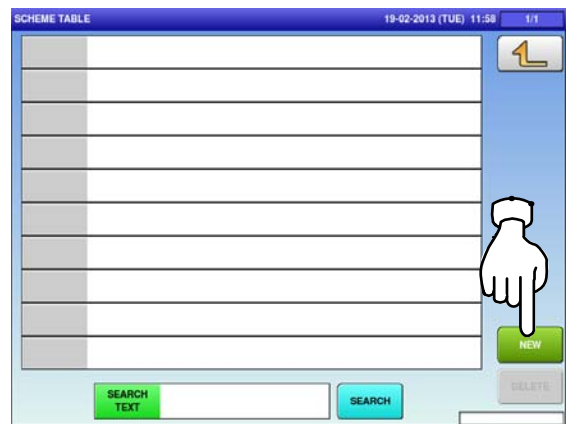

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

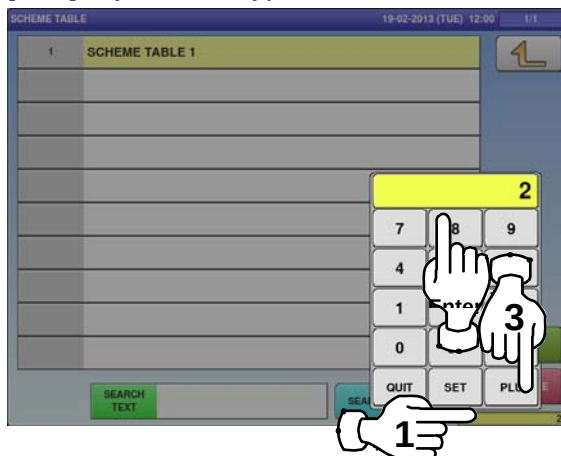


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

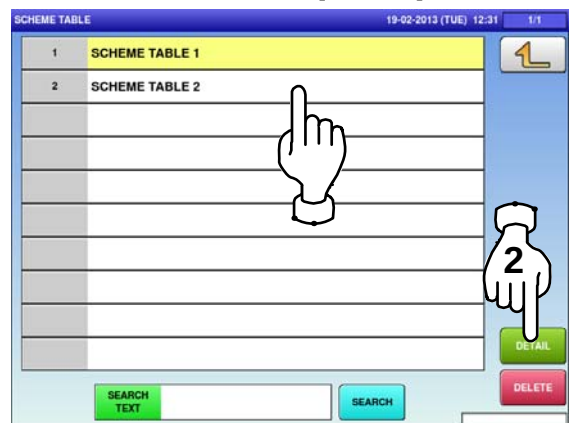


In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

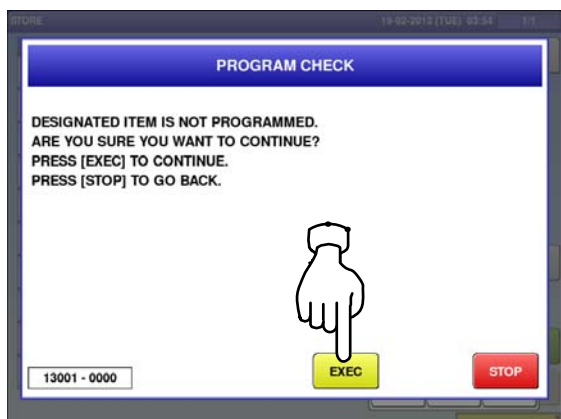

- 4.** The "Scheme Table / Detail (Control)" screen is displayed. Press the name field.

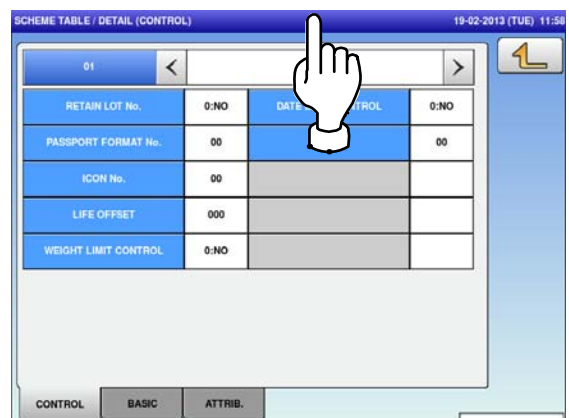


5. The "Scheme Table / Edit screen" is displayed.
Edit text according to the procedure described in Appendix "Text Editing".





6. Press the Return button to finish the editing.



7. The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

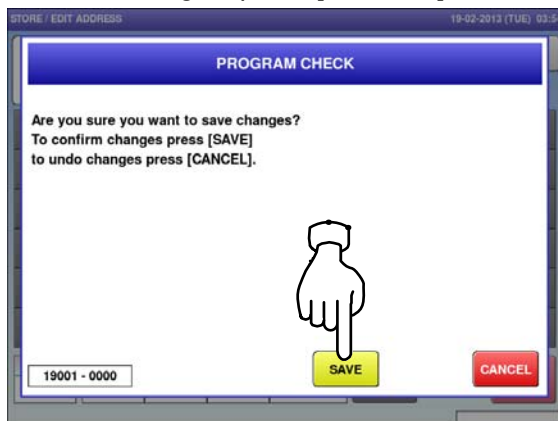

8. The edited data has been registered.

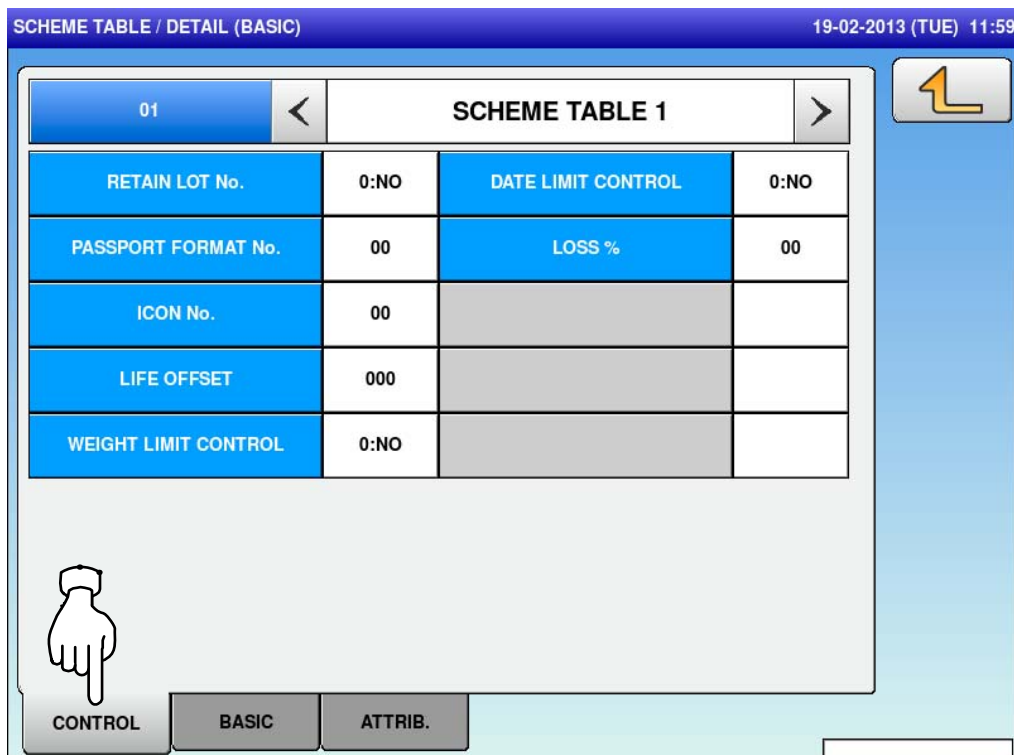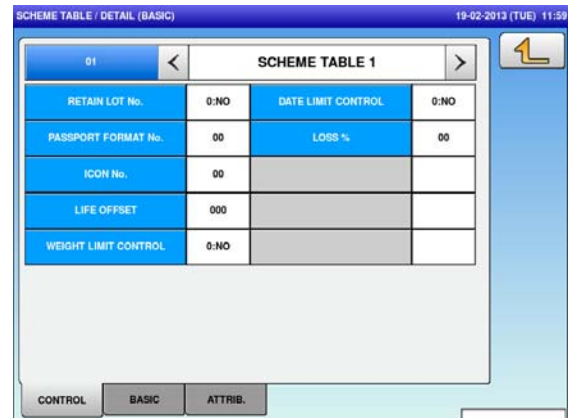

ITEM	DESCRIPTIONS
RETAIN LOT No.	Press this field to select whether or not to use this lot number.
	0: No 1: Yes
PASSPORT FORMAT No.	Enter a numerical value and press this field.
ICON No.	Enter a numerical value and press this field.
LIFE OFFSET	Enter a numerical value and press this field.
WEIGHT LIMIT CONTROL	Press this field to select whether or not to control the weight limit.
	0: No 1: Yes
DATE LIMIT CONTROL	Press this field to select whether or not to control the date limit.
	0: No 1: Yes
LOSS %	Enter a numerical value and press this field



SCHEME TABLE / DETAIL (BASIC) 19-02-2013 (TUE) 11:59

01 < SCHEME TABLE 1 >

	AI	START	STOP	MAX DIGIT
LOT/CARCASS		00	00	00
GTIN		00	00	00
WEIGHT		00	00	00

PASSPORT LOT START 0

PASSPORT GTIN START 0

CONTROL BASIC ATTRIB.

ITEM	DESCRIPTIONS
LOT/CARCASS	Enter a numerical value and press the applicable data field.
GTIN	Enter a numerical value and press the applicable data field.
WEIGHT	Enter a numerical value and press the applicable data field.
PASSPORT LOT START	Enter a numerical value and press the data field.
PASSPORT GTIN START	Enter a numerical value and press this data field.



SCHEME TABLE / DETAIL (ATTRIB.) 19-02-2013 (TUE) 12:32 1/4

02 < SCHEME TABLE 2 >

TITLE TEXT	START	STOP	AI	VARIABLE
	00	00		0:NO
	00	00		0:NO
	00	00		0:NO
	00	00		0:NO

CONTROL BASIC ATTRIB. DELETE

9.

Upon completion of the table data registration, press the Return button.

SCHEME TABLE / DETAIL (BASIC) 19-02-2013 (TUE) 11:59

01 < SCHEME TABLE 1 >

RETAIN LOT No.	0:NO	DATE LIMIT CONTROL	0:NO
PASSPORT FORMAT No.	00	LOSS %	00
ICON No.	00		
LIFE OFFSET	000		
WEIGHT LIMIT CONTROL	0:NO		

CONTROL BASIC ATTRIB.

10.

The edited data has been registered.

SCHEME TABLE 19-02-2013 (TUE) 12:31 1/1

1	SCHEME TABLE 1
2	SCHEME TABLE 2


SEARCH TEXT SEARCH DETAIL DELETE

4.16 GEN table data


1. Press the "GEN TABLE" icon on the menu selection screen.



2. The "GEN Table" screen is displayed. Press a desired field for selection.

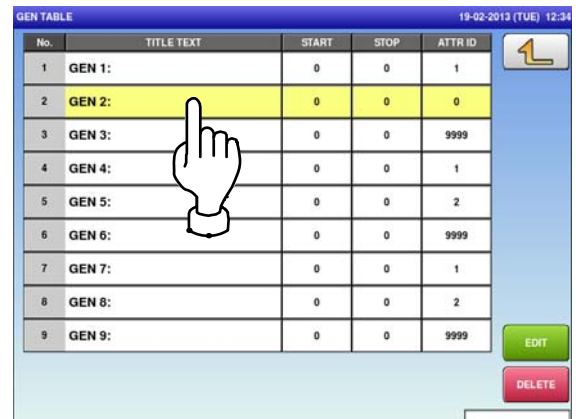

3. Enter a numerical value, press the applicable field, and press the [SET] key.

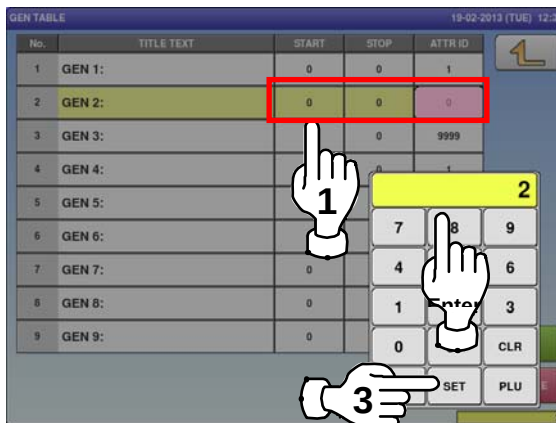

4. To change the text, press the [EDIT] button.




5. The "GEN Table / Title Text Edit" screen is displayed. Edit text according to the procedure described in Appendix "Text Editing".



6. Press the Return button to exit the edit mode.



7. The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

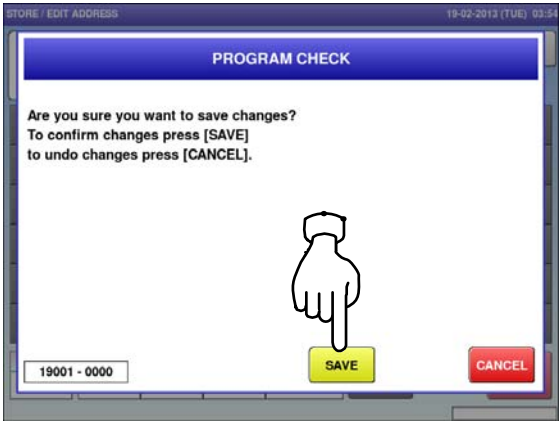

8. The edited data has been registered.

GEN TABLE					19-02-2013 (TUE) 12:35
No.	TITLE TEXT	START	STOP	ATTR ID	
1	GEN 1:	0	0	1	
2	GEN TABLE 2:	0	0	2	
3	GEN 3:	0	0	9999	
4	GEN 4:	0	0	1	
5	GEN 5:	0	0	2	
6	GEN 6:	0	0	9999	
7	GEN 7:	0	0	1	
8	GEN 8:	0	0	2	
9	GEN 9:	0	0	9999	


EDIT
DELETE

4.17 Lookup Table data


- 1.** Press the “LOOKUP TABLE” icon on the menu selection screen.




- 2-1** The “Lookup Table” screen is displayed. To create the first table, press the [NEW] button.

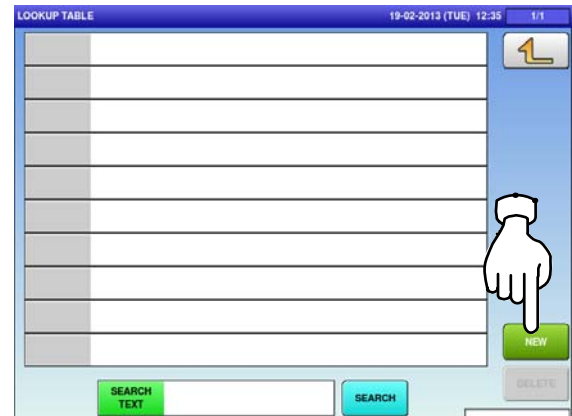

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

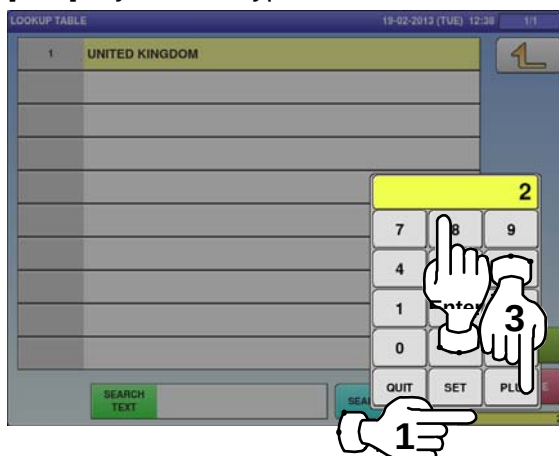


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

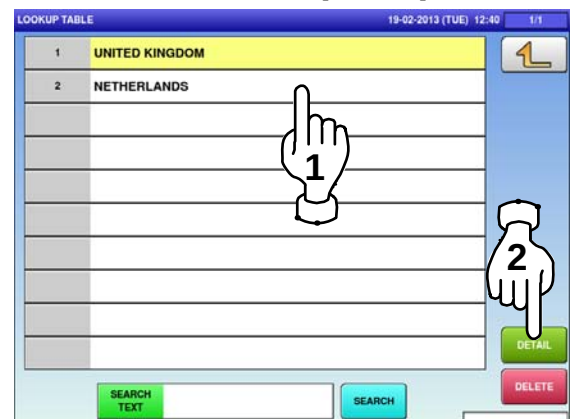

In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

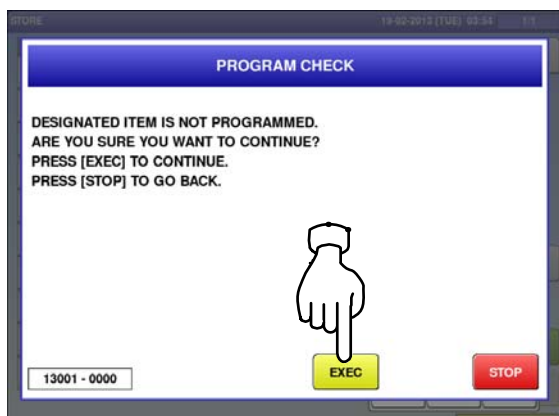


- 4.** The “Lookup Table / Name Edit” screen is displayed. Edit text according to the procedure described in Appendix “Text Editing”.



5. Press the Return button to finish the editing.




6. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

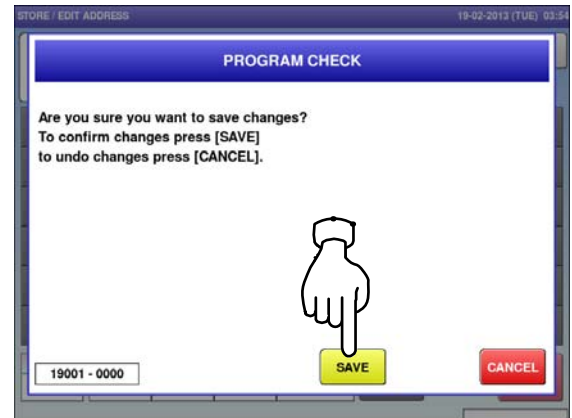


7. The edited text has been registered.




- 8-1. To create the first data, press the [NEW] button.

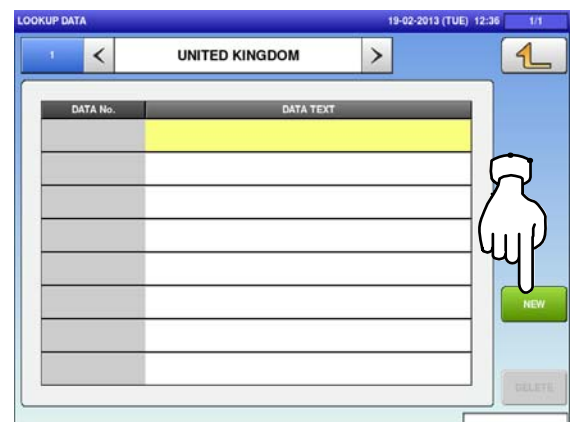

- 8-2 To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

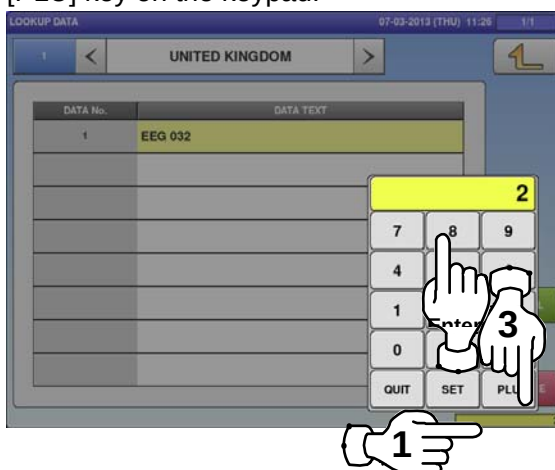

- 8-3 To change existing data, press a desired field for selection and then the [DETAIL] button.

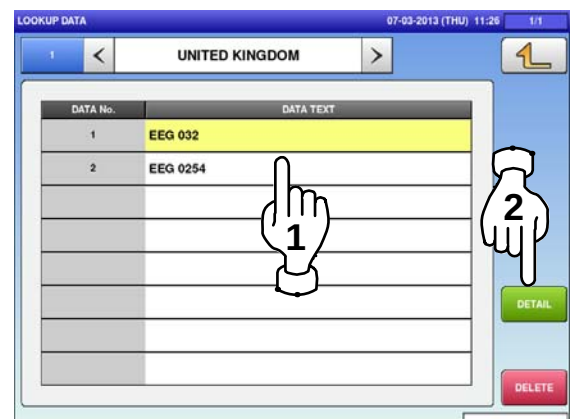


9. The Lookup Data / Text Edit screen is displayed.
Edit text according to the procedure described in Appendix "Text Editing".




10. Press the Return button to finish the editing.



11. The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

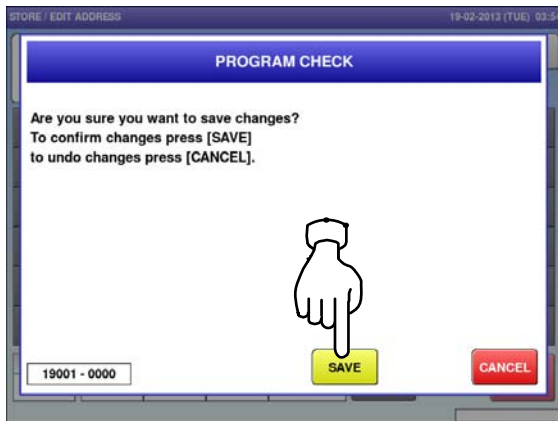


12. The edited data has been registered.

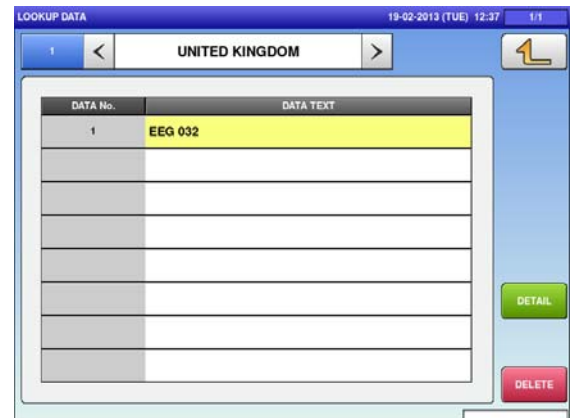


4.18 mince traceability data


1. Press the "MINCE TRACE." icon on the menu selection screen.

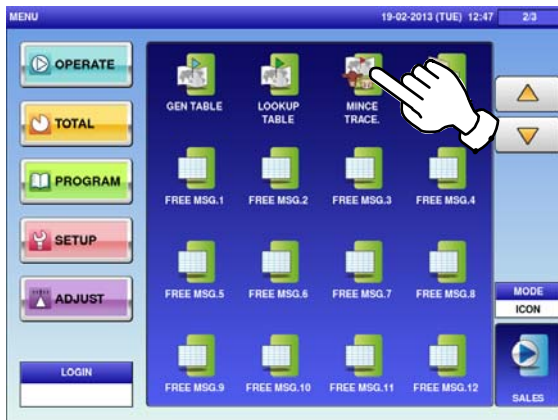


2. The "Mince Traceability" screen is displayed. Press a desired field for selection.

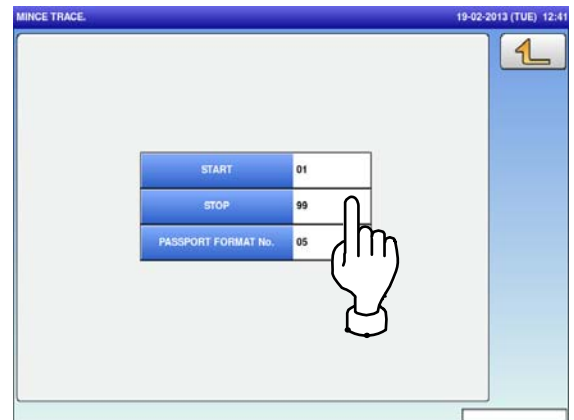

3. The keypad is displayed. Enter a desired numerical value and press the [SET] key.

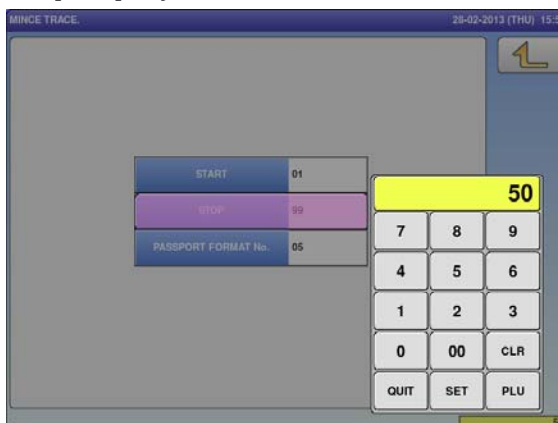


4. Press the Return button to complete the procedure.

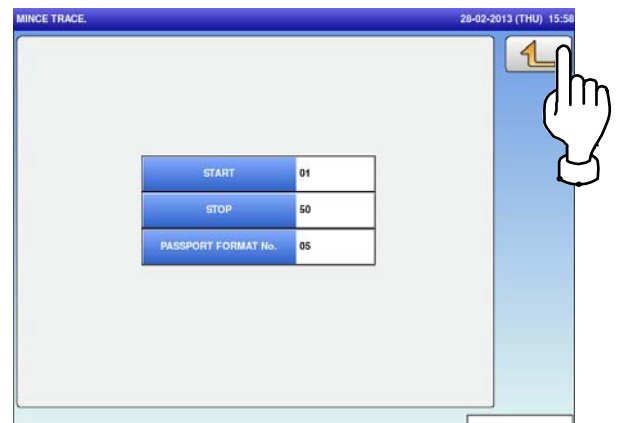

4.19 Fixed price symbols


1.

Press the "FIX PRICE SYMBOL" icon on the menu selection screen.

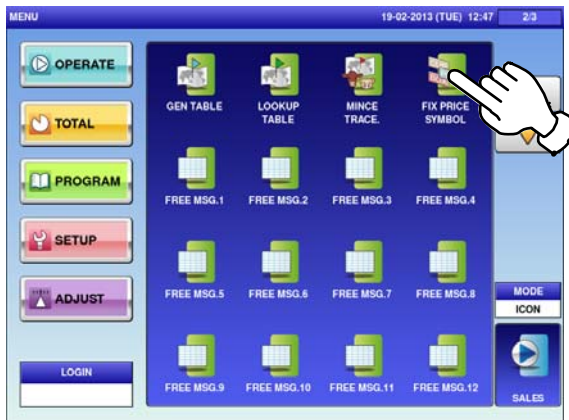


2.

The "Fix Price Symbol" screen is displayed.

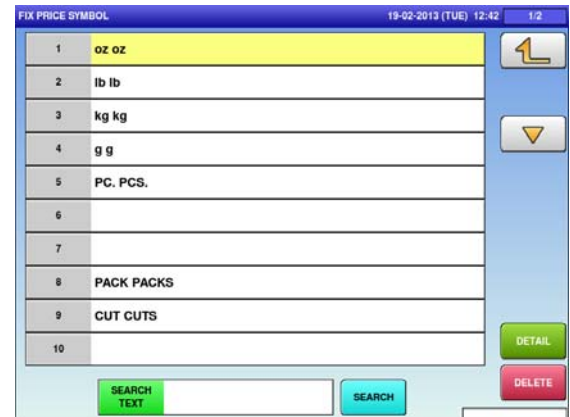

3.


Press the Input field at the bottom right of the screen to display the keypad.

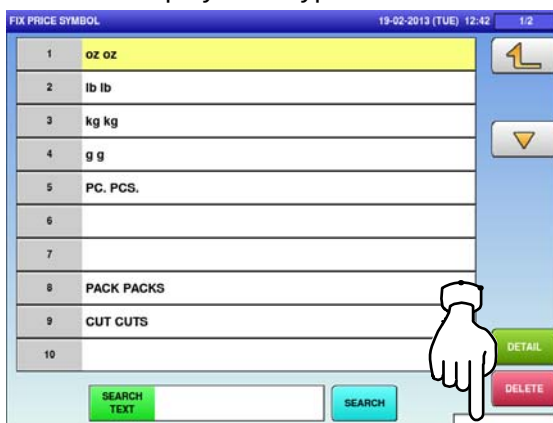

4.

Enter a desired table number and press the [PLU] key on the keypad.

EXAMPLE Symbol No.6

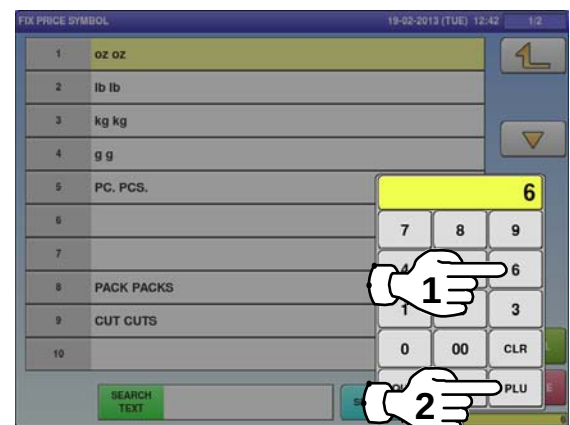

5.

The "Fix Price Symbol / Edit" screen is displayed.

Edit text according to the procedure described in Appendix "Text Editing".




6.


Press the Return button to finish the editing.



7. The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

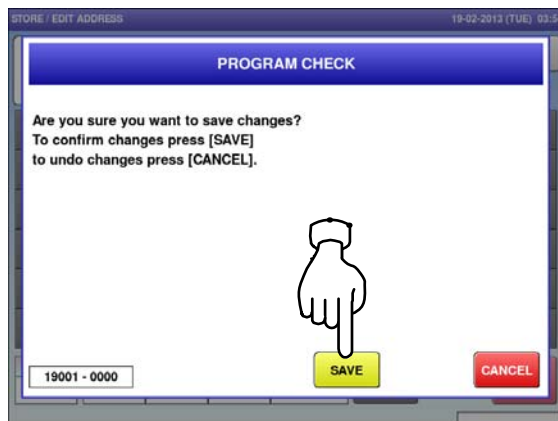

8. The edited text has been registered.

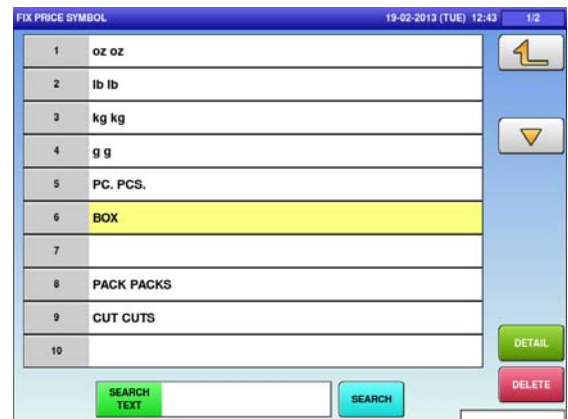

4.20 free message data


1.

Press the "FREE MSG." icon on the menu selection screen.




2-1

The "Free Message" screen is displayed. To create the first message, press the [NEW] button.

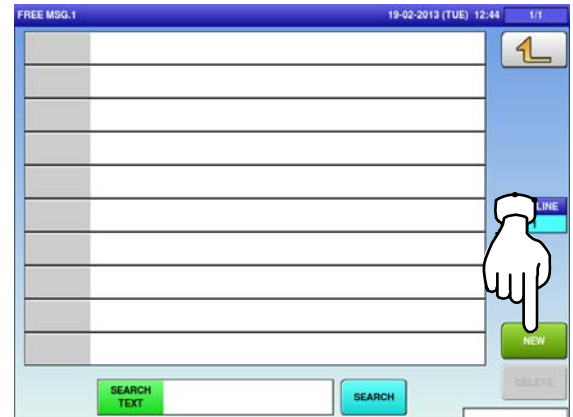


2-2

To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

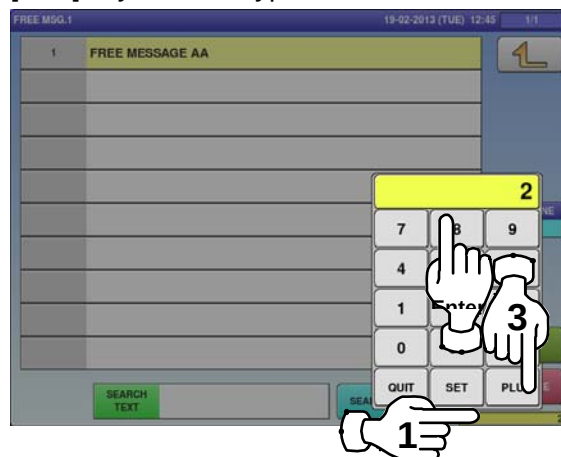

2-3


To change existing data, press a desired field for selection and then the [DETAIL] button.

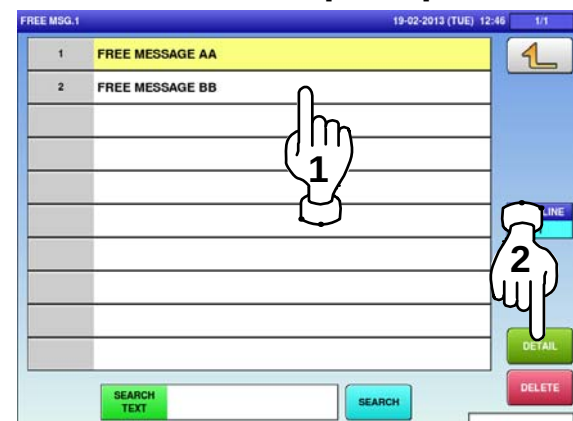

In this case, go to Step 4.

3.

If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

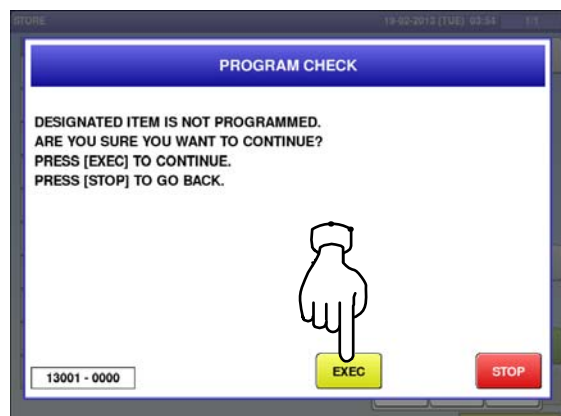

4.

The "Free Message Edit" screen is displayed. Edit text according to the procedure described in Appendix "Text Editing".



5. Press the Return button to finish the editing.




6.


The confirmation screen is displayed.

To confirm changes, press [SAVE].

To undo changes, press [CANCEL].


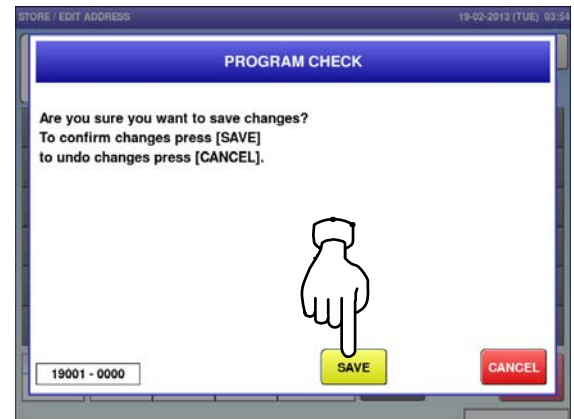


7. The edited data has been registered.



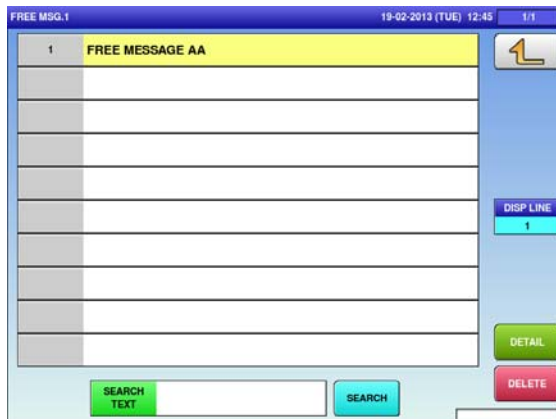


4.21 check label data

1. Press the "CHECK LABEL" icon on the menu selection screen.
2. The "Check Label" screen is displayed. Press a desired field.

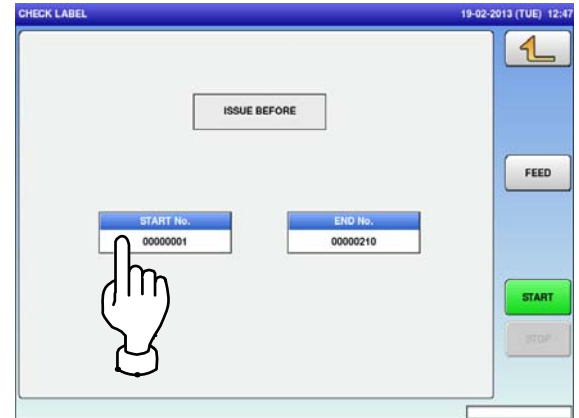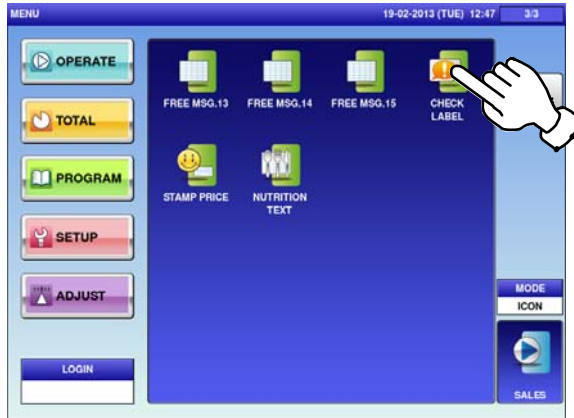

3. Enter the start number and the end number via the keypad, and press the [SET] key.
4. Press the [STRAT] button to print a label.

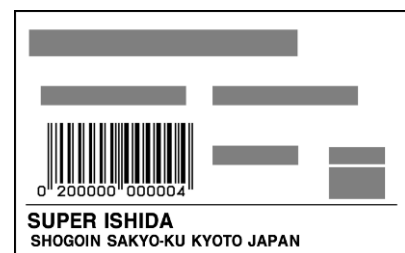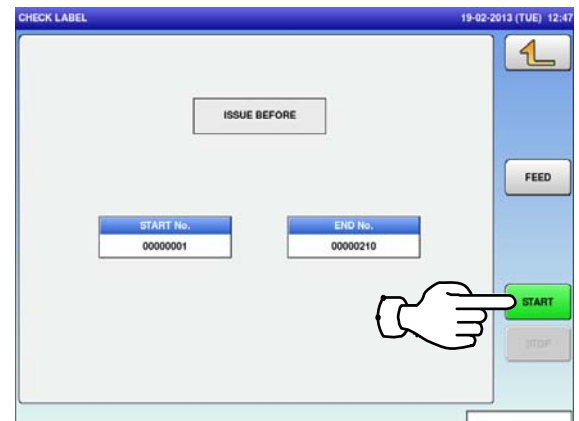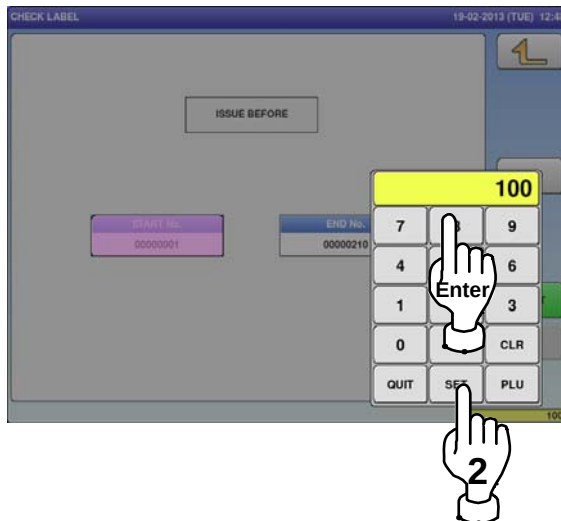


4.22 STAMP PRICE data


1. Press the "STAMP PRICE" icon on the menu selection screen.



2. The "Stamp Price" screen is displayed. Press a desired field for selection.

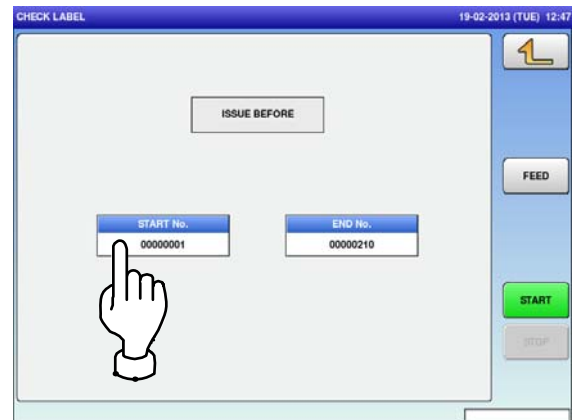

3. Enter the stamp price and the reference price via the keypad, and press the [SET] key.

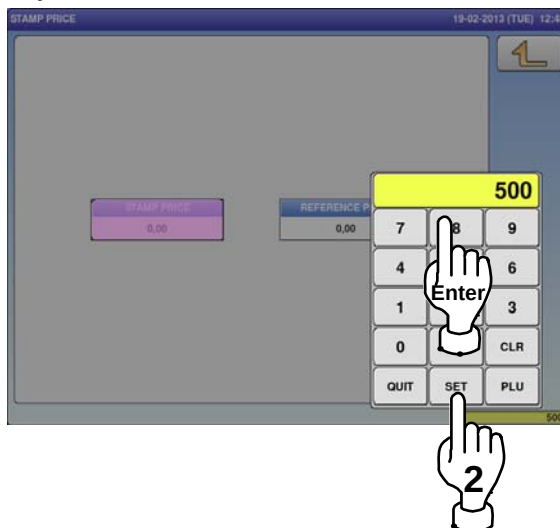


4.23 nutrition text data


- 1.** Press the "NUTRITION TEXT" icon on the menu selection screen.




- 2-1** The "Nutrition Text" screen is displayed. To create the first text, press the [NEW] button.

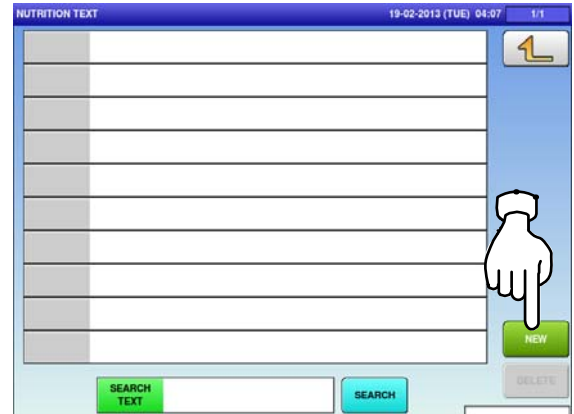

- 2-2** To call up desired data, press the Input field at the bottom right of the screen to display the keypad. Then, enter a numerical value and press the [PLU] key on the keypad.

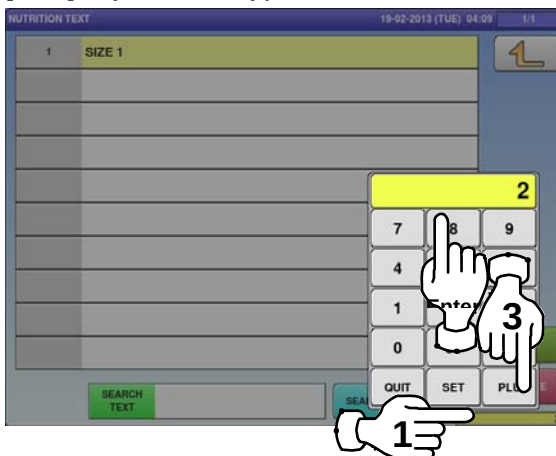


- 2-3** To change existing data, press a desired field for selection and then the [DETAIL] button.

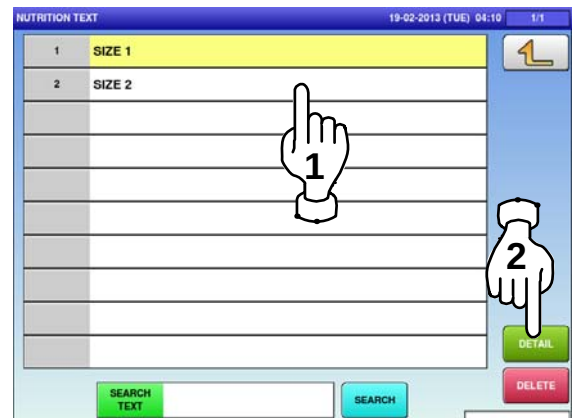


In this case, go to Step 4.

- 3.** If a non-registered item has been called, the confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

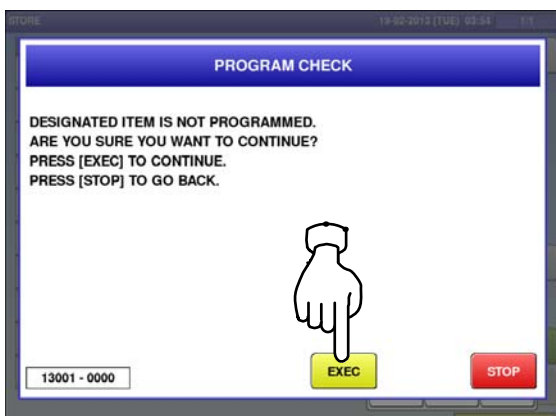

- 4.** The "Nutrition Text / Detail" screen is displayed. To create a new text, press a desired field.

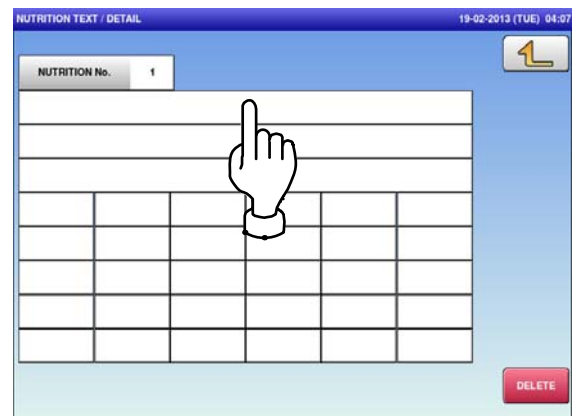


5. The “Nutrition Text / Edit” screen is displayed.
Edit text according to the procedure described in Appendix “Text Editing”.




6. Press the Return button to finish the editing.



7. The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

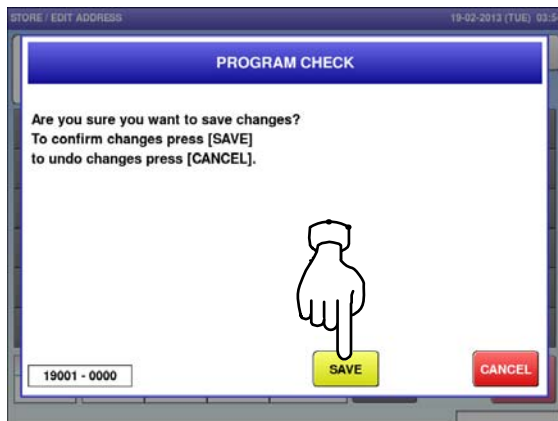

8. The edited data has been registered.

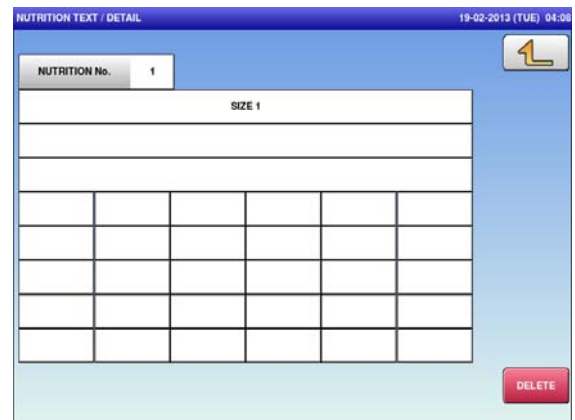

SETUP MODE


5.1 setup mode entry / Exit

1. Ensure that the initial screen is displayed. Then, press the Return button on the screen to display the "Menu" screen.


Note: The contents of the initial screen may differ depending on the settings on your machine.



2. The "Menu" screen is displayed. Then, press the [SETUP] button.

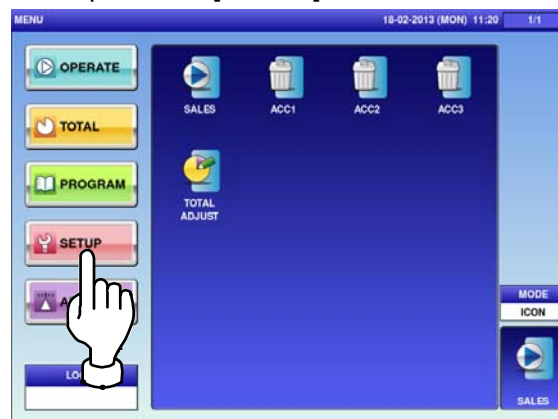

3. The setup menu selection screen is displayed.

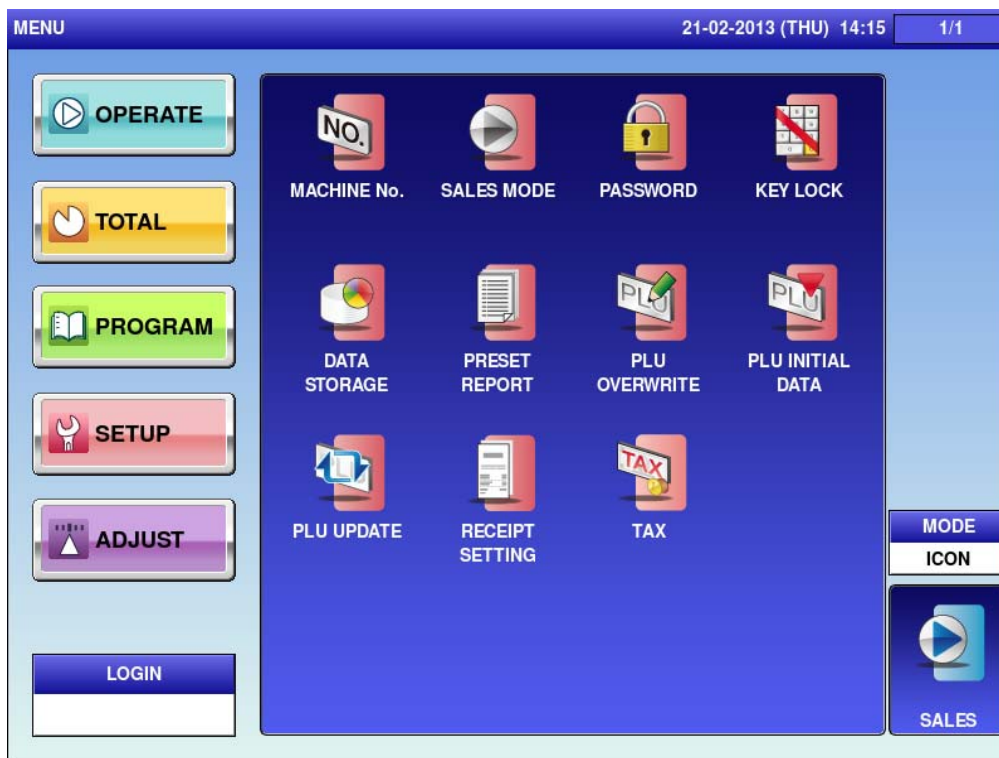

Note: To exit the Setup Mode, press the [SALES] button.

5.2 MACHINE NUMBER / NETWORK NUMBER

1. Press the "MACHINE No." icon on the menu selection screen. → The "Machine No. (Basic)" screen is displayed.




2. Press a desired field for selection.

EXAMPLE Network No.9



3. Enter a numerical value via the keypad and press the [SET] key.

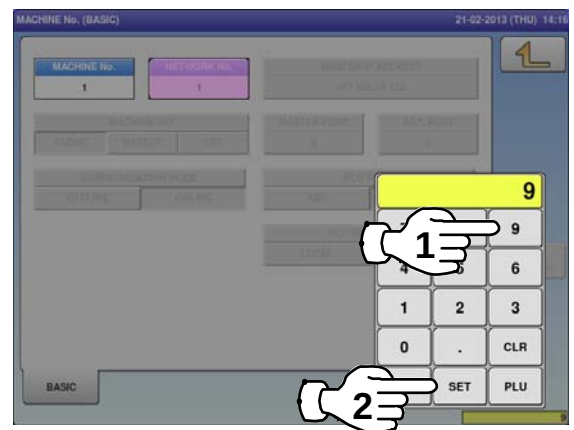


4. Press a desired field for selection.


EXAMPLE Network No.9



5. The network number has been registered. To finish the editing, press the Return button.

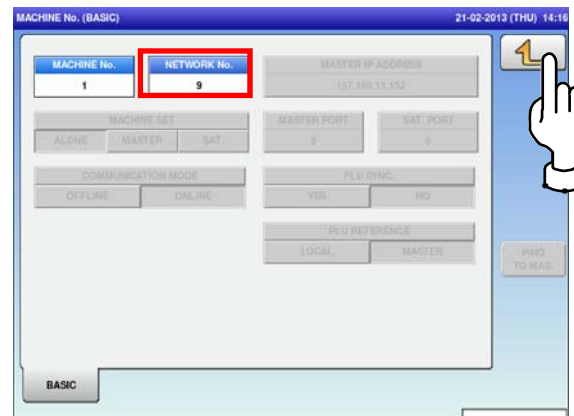


6. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

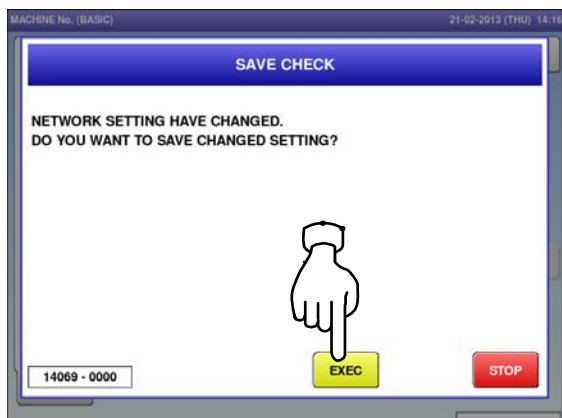


5.3 SALES MODE

1. Press the “SALES MODE” icon on the menu selection screen.

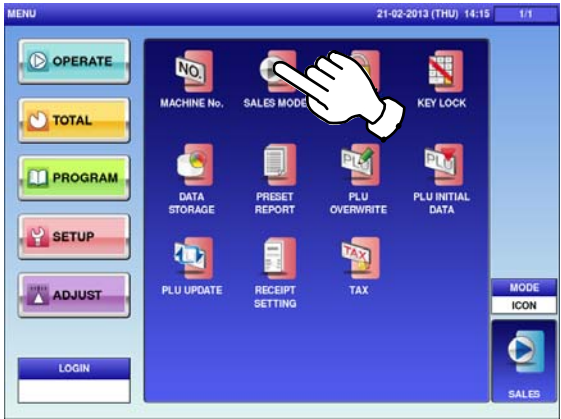


2. The “Sales Mode” screen is displayed. Then, select a desired sales mode by pressing the corresponding button.

EXAMPLE “With Operator”

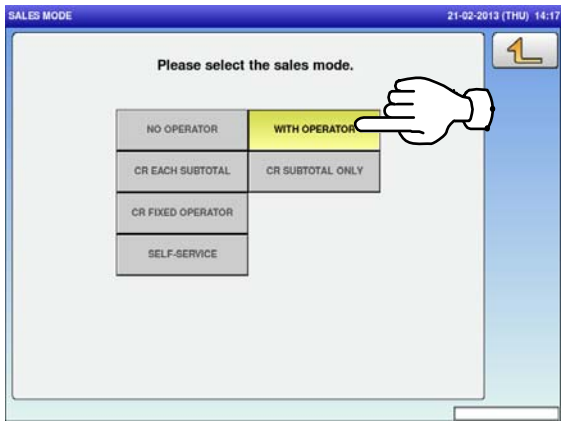

3. Press the Return button to complete the procedure.

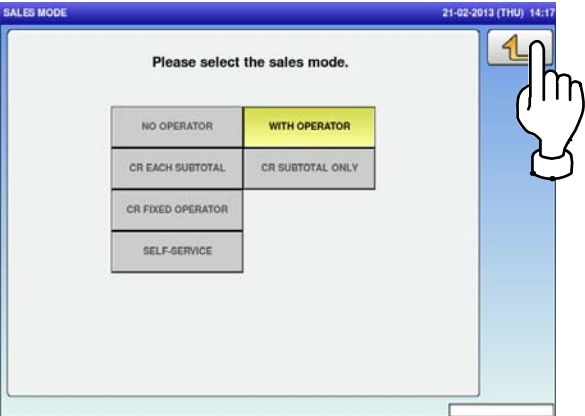

5.4 PASSWORD

1. Press the "PASSWORD" icon on the menu selection screen.



→ The "Password (Operate)" screen is displayed.



2. Press the "TOTAL" tab to display the "Password (Total)" screen.




3. Press the "PROGRAM" tab to display the "Password (Program)" screen. To turn pages, press [▼] or [▲].







5.




6. Press the “PASSWORD” field to display the keypad.
Enter a 6-digit password and press [SET] key on the keypad.

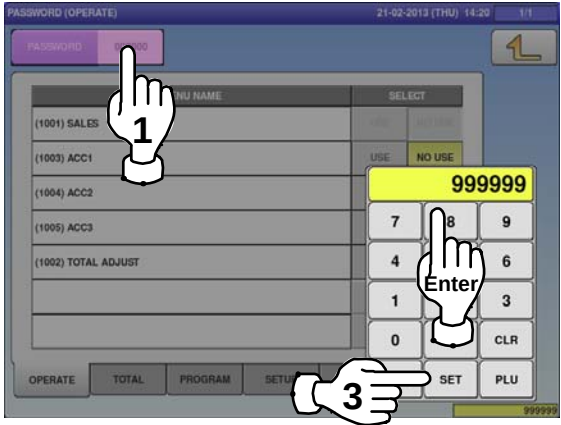

7. Select a desired mode by pressing the corresponding tab, and press any selection buttons to set whether or not to prompt the operator for the password for each menu.

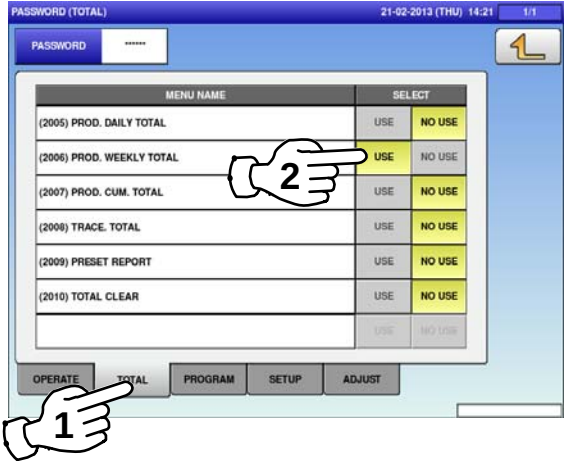


8. Press the Return button to complete the procedure.

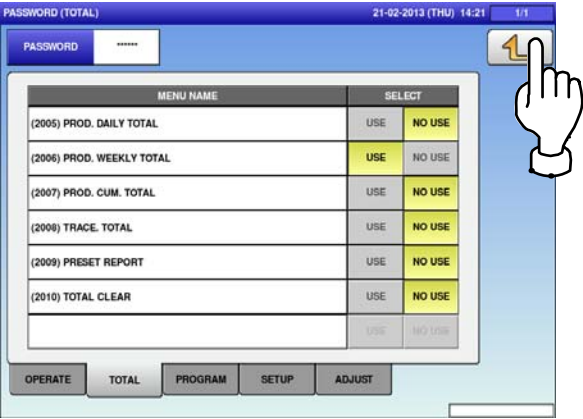

5.5 KEY LOCK



1. Press the “KEY LOCK” icon on the menu selection screen.

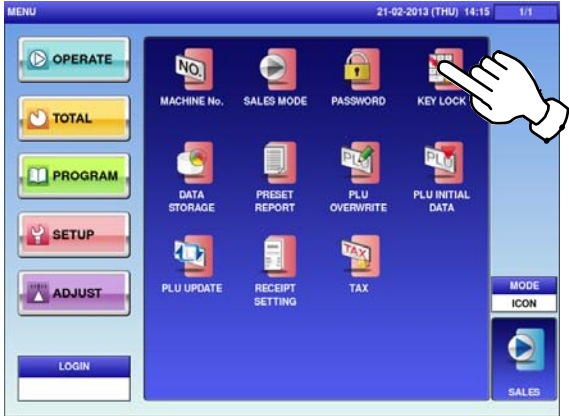

➔ The “Key Lock (Display Key)” screen is displayed.



2. Press the “FUNCTION KEY” tab to display the “Key Lock (Function Key)” screen. To turn pages, press [▼] or [▲].

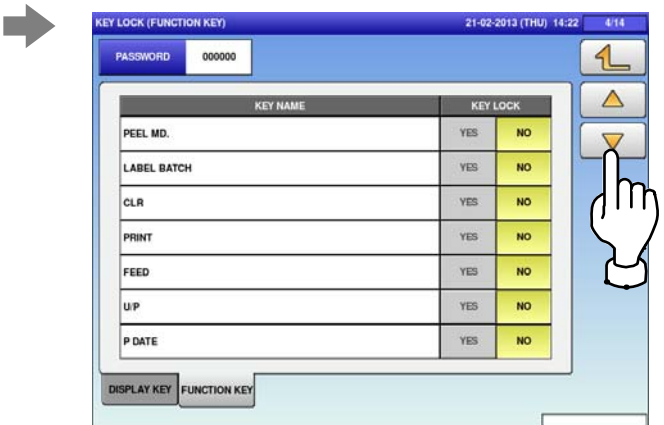
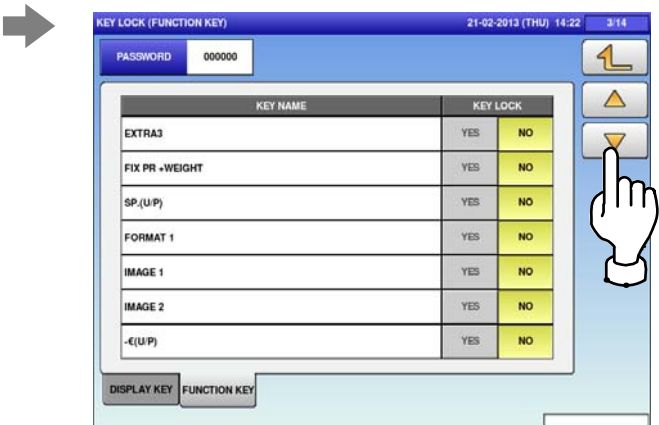






3. Press the “PASSWORD” field to display the keypad. Then, enter a 6-digit password and press the [SET] key on the keypad.

4. Select a desired key category by pressing the corresponding tab, and press any selection buttons to lock or unlock the key.

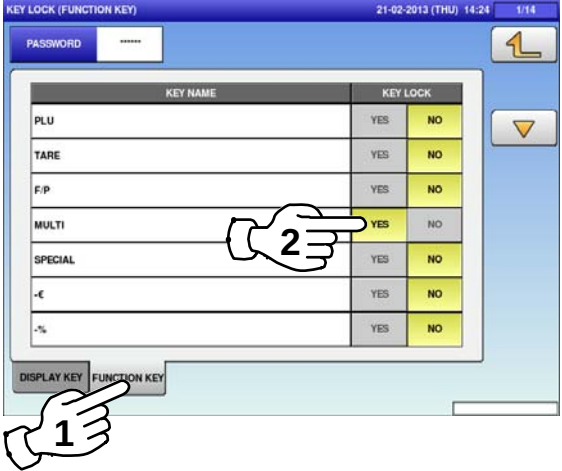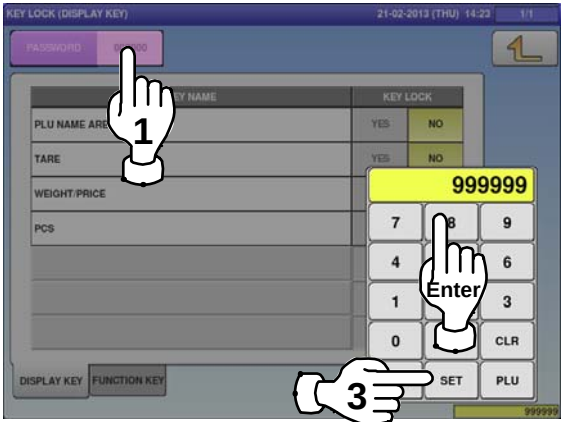


5. Press the Return button to complete the procedure.




5.6 DATA STORAGE

1.

Press the “DATA STORAGE” icon on the menu selection screen.


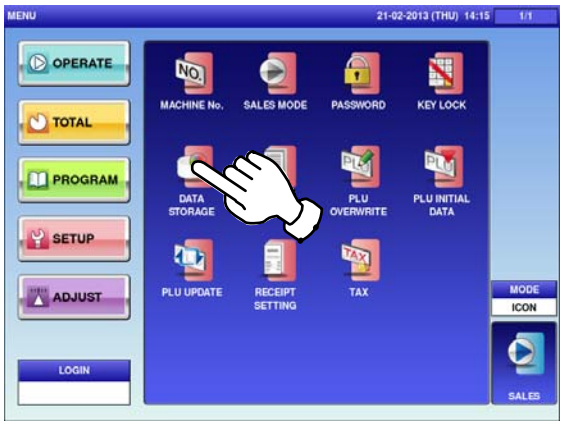


The “Data Storage (Total Add)” screen is displayed.
To turn pages, press [▼] or [▲].

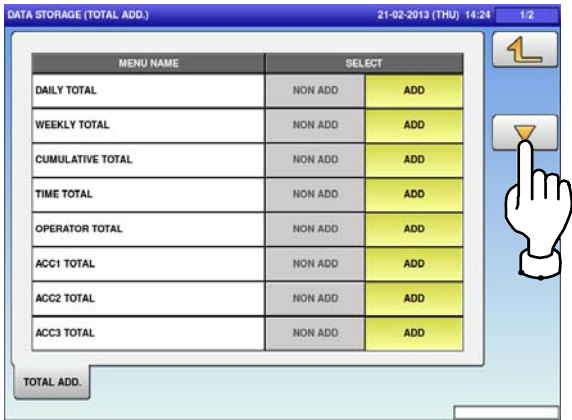


2.

Press any selection buttons to set whether or not to apply the total addition function for each menu.

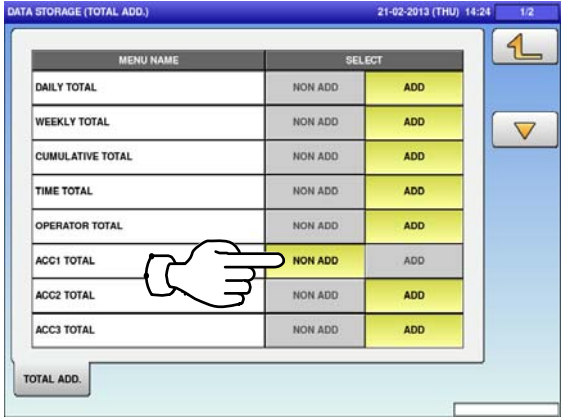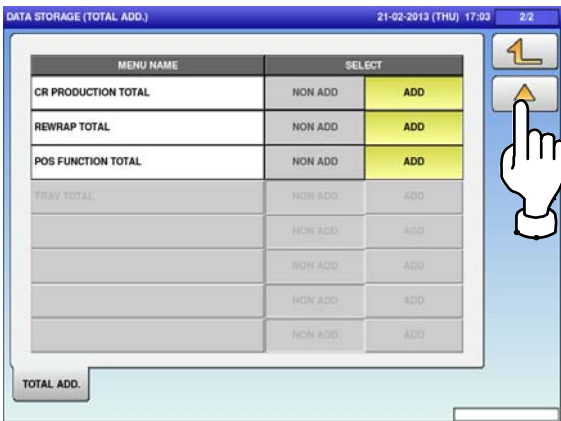

3.

Press the Return button to complete the procedure.




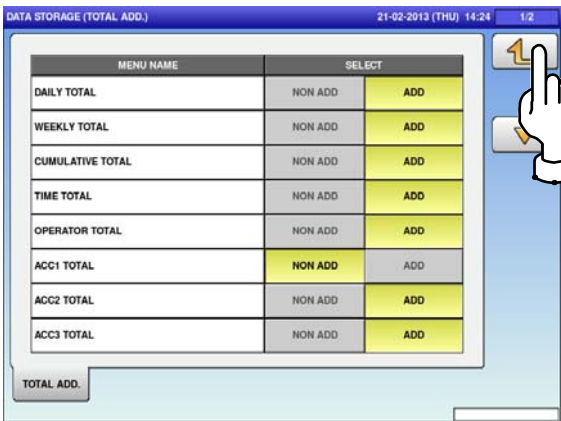


5.7 PRESET REPORT

1. Press the “PRESET REPORT” icon on the menu selection screen.





The “Preset Report (Daily)” screen is displayed.
To turn pages, press [▼] or [▲].

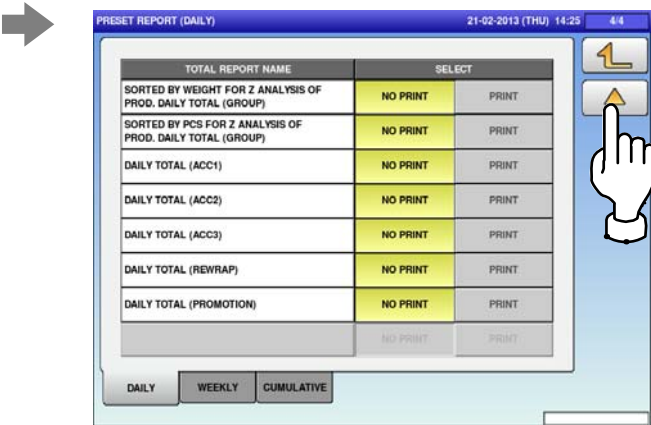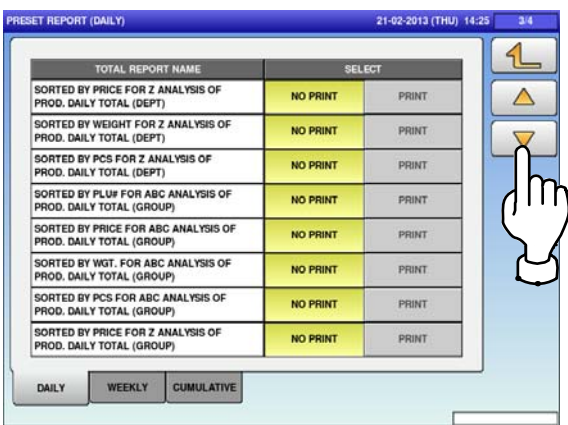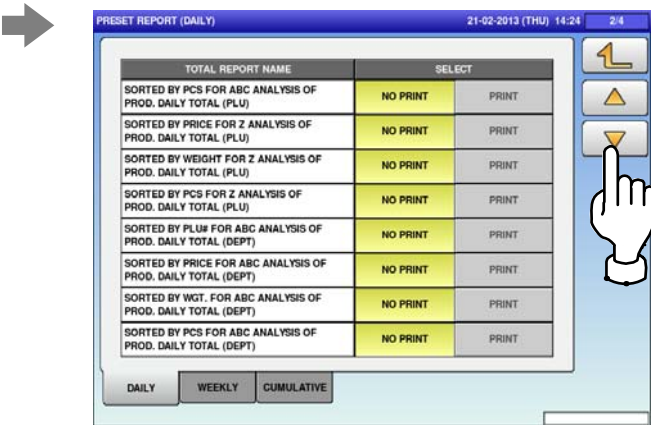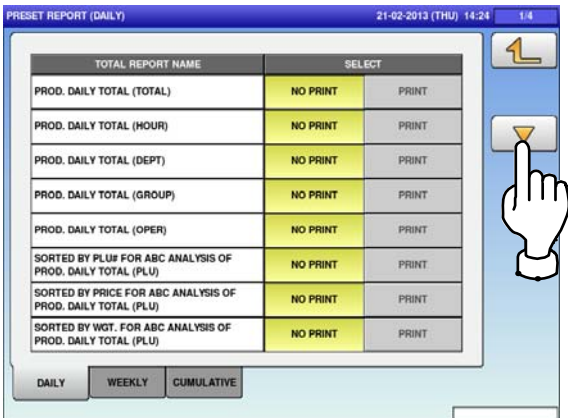


2. Press the “WEEKLY” tab to display the “Preset Report (Weekly)” screen.




3. Press the “CUMULATIVE” tab to display the “Preset Report (Cumulative)” screen. To turn pages, press [▼] or [▲].

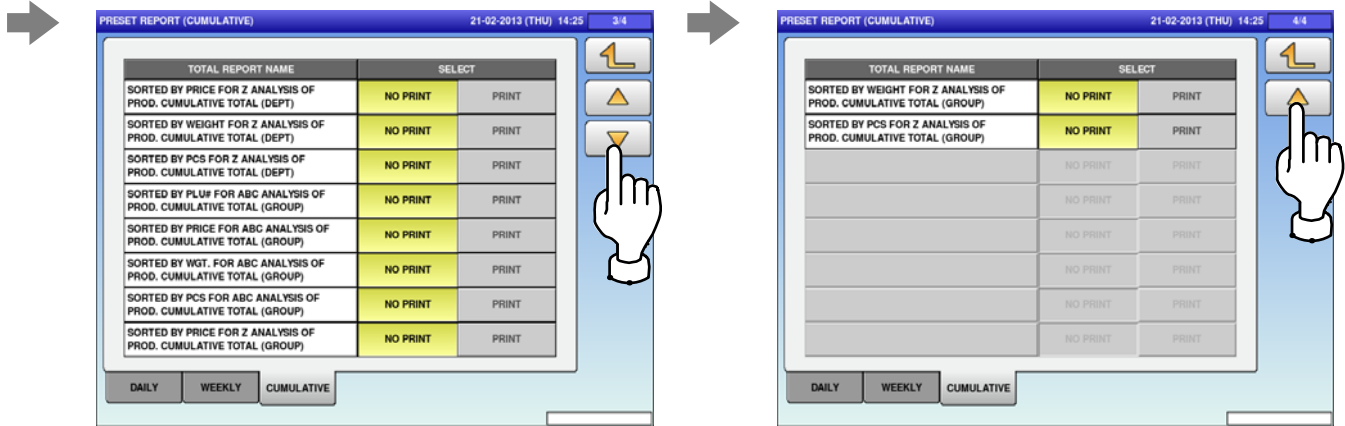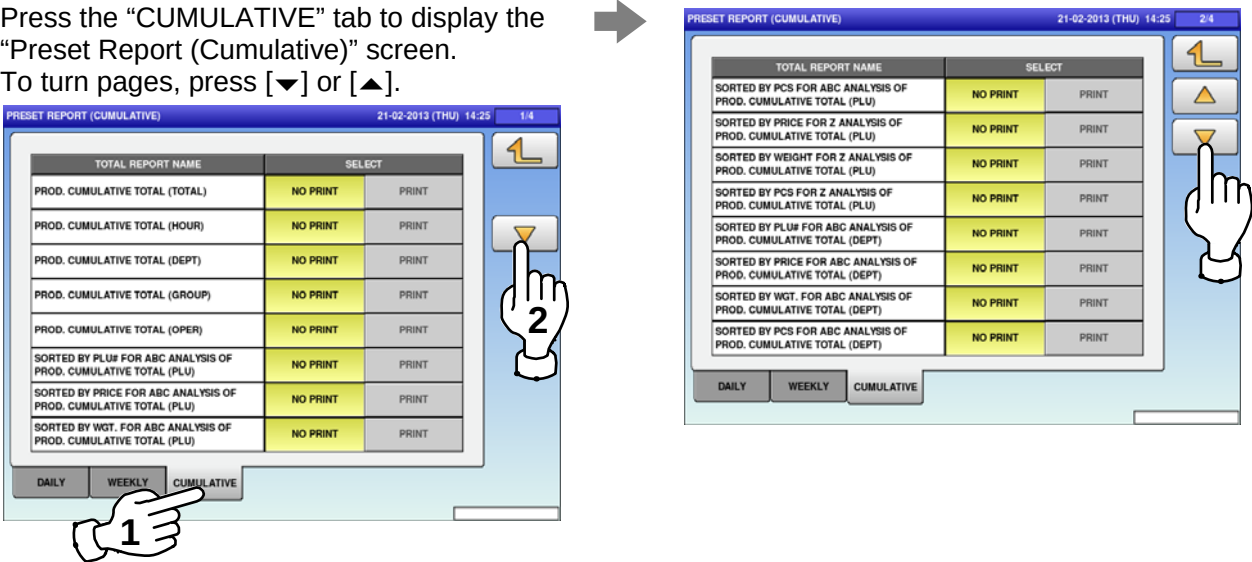

4. Select a desired report type by pressing the corresponding tab, and press any selection buttons to set whether or not to print the total.

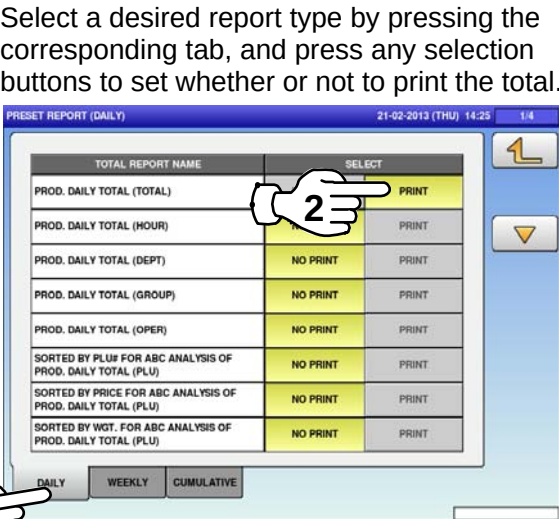


5. Press the Return button to complete the procedure.

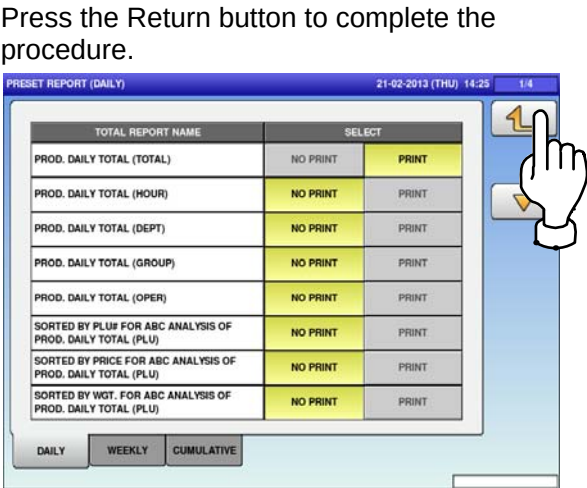


5.8 PLU OVERWRITE

1. Press the “PLU OVERWRITE” icon on the menu selection screen.

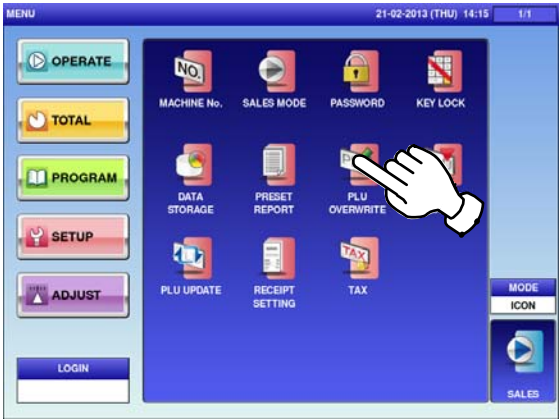

The “PLU Overwrite” screen is displayed. To turn pages, press [▼] or [▲].

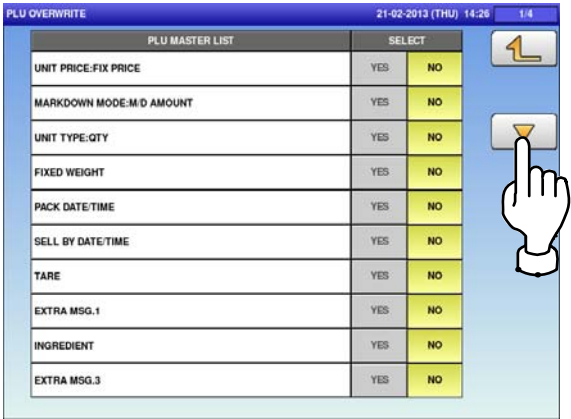

Note: Display items may vary depending on the country setting.



2. Press any selection buttons to set whether or not to overwrite the item automatically.



3. Press the Return button to complete the procedure.

PLU OVERWRITE

21-02-2013 (THU) 14:27

1/4

PLU MASTER LIST	SELECT	
UNIT PRICE:FIX PRICE	YES	NO
MARKDOWN MODE:M/D AMOUNT	YES	NO
UNIT TYPE:QTY	YES	NO
FIXED WEIGHT	YES	NO
PACK DATE/TIME	YES	NO
SELL BY DATE/TIME	YES	NO
TARE	YES	NO
EXTRA MSG.1	YES	NO
INGREDIENT	YES	NO
EXTRA MSG.3	YES	NO

1




5.9 PLU INITIAL DATA

1.


Press the “PLU INITIAL DATA” icon on the menu selection screen.



The “PLU Initial Data (Sale 1)” screen is displayed.

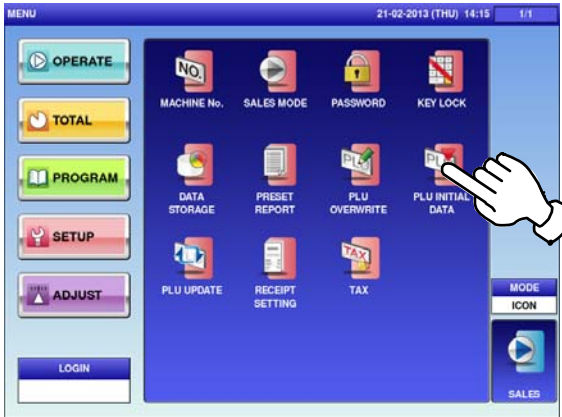

SALES MODE	Press [<] or [>] to select a desired sales mode.
	0: Weight (for selling weighing products)
	1: Fix price (for selling fixed price products)
	2: Weight fix price (for selling weighing fixed price products)
UNIT PRICE / FIXED PRICE	Enter a unit price or fixed price and press this field.
OPEN PRICE	Press [<] or [>] to select whether or not to allow an open price system.
	0: Yes 1: No
FIXED WEIGHT	Enter a fixed weight and press this field.
TARE	Enter a tare weight and press this field.
TAX	Enter a desired number and press this field.

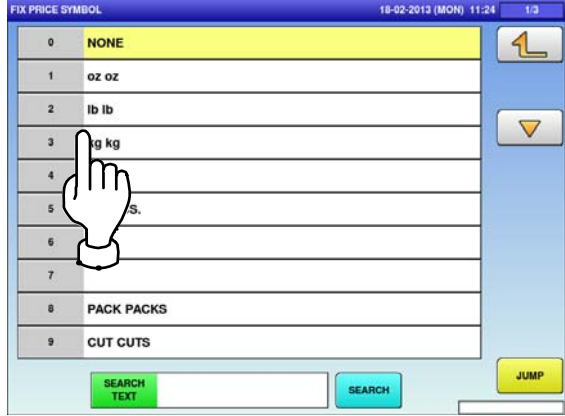MARKDOWN MODE	Press [<] or [>] to select a desired markdown mode. 0: Normal price 1: Special price 2: Amount discount for total price 3: Percent discount for total price 4: Special unit price 5: Amount discount for unit price 6: Percent discount for unit price
M/D AMOUNT	Enter a markdown amount or percentage and press this field.
2nd TARE	Enter a tare weight, and press this field.
UNIT TYPE	Press the "UNIT TYPE" field to display the "Fix Price Symbol" screen. Then, press a desired field for selection. 
QTY	Enter the packed quantity and press this field.
TARE	Enter a tare percentage and press this field.
LOWER WEIGHT	Enter the lower weight limit and press this field.
UPPER WEIGHT	Enter the upper weight limit and press this field.
FORCED TARE	Press [YES] or [NO] button to select whether or not to use the forced tare function.

2.

Press the "SALE 2" tab to display the "PLU Initial Data (Sale 2)" screen.

PLU INITIAL DATA (SALE2) 21-02-2013 (THU) 14:28

POINT FLAG< 0:OFF >

POINT TYPE< 0:WGT >

POINTS0

DEPOSIT FLAG< 0:OFF >

SALE1

SALE2

MSG.

IMAGE

PRINT

DATE

CODE

LINK

ITEM	DESCRIPTIONS
POINT FLAG	Press [<] or [>] to select whether or not to use the point flag. 0: OFF 1: ON
POINT TYPE	Press [<] or [>] to select a desired point type. 0: Weight 1: Fixed weight
POINTS	Enter a desired number and press this field.

3. Press the “MSG.” tab to display the “PLU Initial Data (Message)” screen.

PLU INITIAL DATA (MSG.) 21-02-2013 (THU) 14:28 1/3

NUTRITION	0	NONE
EXTRA MSG.1	0	NONE
INGREDIENT	0	NONE
EXTRA MSG.3	0	NONE
COUPON MSG.	0	NONE
POP MSG.	0	NONE
COOKING	0	NONE
FREE MSG.	0	NONE

SALE1

SALE2

MSG.

IMAGE

PRINT

DATE

CODE

LINK

4. Press a desired field for selection.

PLU INITIAL DATA (MSG.) 21-02-2013 (THU) 14:28 1/3

NUTRITION	0	NONE
EXTRA MSG.1	0	NONE
INGREDIENT	0	NONE
EXTRA MSG.3	0	NONE
COUPON MSG.	0	NONE
POP MSG.	0	NONE
COOKING TIME	0	NONE
FREE MSG.1	0	NONE

SALE1

SALE2

MSG.

IMAGE

PRINT

DATE

CODE

LINK

5. The “Extra Message” screen is displayed. Press a desired field for selection.

21-02-2013 (THU) 14:28 1/1

0	NONE
1	EXTRA MESSAGE AA
2	EXTRA MSG. BB

DISP LINE 1

SEARCH TEXT SEARCH JUMP

➡ The selected message has been registered.

PLU INITIAL DATA (MSG.) 21-02-2013 (THU) 14:28 1/3

NUTRITION	0	NONE
EXTRA MSG.1	1	EXTRA MESSAGE AA
INGREDIENT	0	NONE
EXTRA MSG.3	0	NONE
COUPON MSG.	0	NONE
POP MSG.	0	NONE
COOKING TIME	0	NONE
FREE MSG.1	0	NONE

SALE1 SALE2 MSG. IMAGE PRINT DATE CODE LINK

6. Press the “IMAGE” tab to display the “PLU Initial Data (Image)” screen.

PLU INITIAL DATA (IMAGE) 21-02-2013 (THU) 14:29

IMAGE 1 0	IMAGE 2 0
IMAGE 3 0	DISP IMG 0
SH. IMAGE 0	SAFE HANDLING IMAGE
	NO PRINT PRINT

SALE1 SALE2 MSG. IMAGE PRINT DATE CODE LINK


7. Press a desired field for selection.

PLU INITIAL DATA (IMAGE) 21-02-2013 (THU) 14:29

IMAGE 1 0	IMAGE 2 0
IMAGE 0	DISP IMG 0
SH. IMAGE 0	SAFE HANDLING IMAGE
	NO PRINT PRINT

SALE1 SALE2 MSG. IMAGE PRINT DATE CODE LINK

8. The "Image" screen is displayed. Press a desired image for selection.

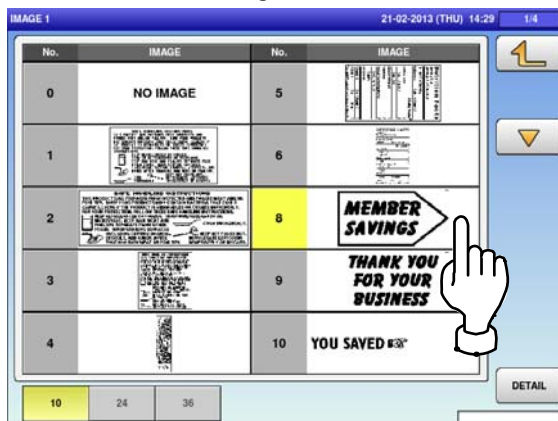

9. The selected image has been registered. Press [NO PRINT] or [PRINT] in the "Safe Handling Image" field to select whether or not to print the image.



10. Press the Display Image field.




11. The "Display Image" screen is displayed. Press a desired image for selection.

Note: To use images stored in the USB memory, press [STORAGE] key. The movie file with the format of MPEG-4, 800 x 600 (SVGA), 10 Mbps, 25 FPS can also be used. Then, press the [SET] button.



12. The selected image has been registered. Press [NO PRINT] or [PRINT] in the "Safe Handling Image" field to select whether or not to print the image.

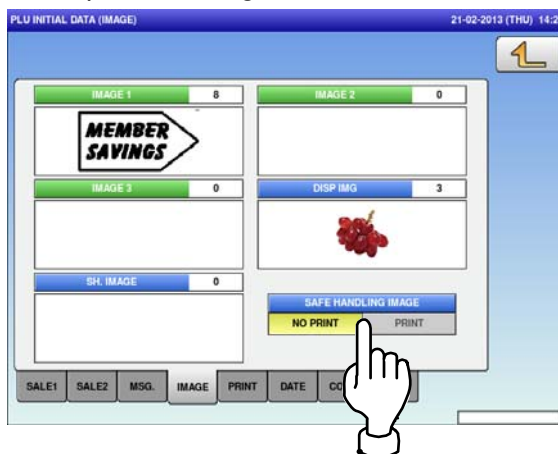

13.

Press the “PRINT” tab to display the “PLU Initial Data (Print)” screen.

PLU INITIAL DATA (PRINT)

21-02-2013 (THU) 14:30

1st LABEL FORMAT No.(M)

0

2nd LABEL FORMAT No.

0

1st LABEL FORMAT No.(A)

0

1st LABEL PRINT

< 1:YES >

2nd LABEL PRINT

< 1:YES >

SALE1

SALE2

MSG.

IMAGE

PRINT

DATE

CODE

LINK

ITEM	DESCRIPTIONS
1st LABEL FORMAT No. (M)	Enter a desired format number and press this field.
2nd LABEL FORMAT No.	Enter a desired format number and press this field.
1st LABEL FORMAT No. (A)	Enter a desired format number and press this field.
1st LABEL PRINT	Press [<] or [>] to select whether or not to print the first label.
	1: Yes 2: No
2nd LABEL PRINT	Press [<] or [>] to select whether or not to print the second label.
	1: Yes 2: No

14

Press the “DATE” tab to display the “PLU Initial Data (Date)” screen.

ITEM	DESCRIPTIONS
PACK DATE PRINT	Press [YES] or [NO] in this field to select whether or not to print the packed date.
PACK TIME PRINT	Press [<] or [>] to select a desired pack time printing method. 0: No print 1: Designated time 2: System clock time
PACK TIME DATA	This field is available only when “1: Designated time” is selected in “PACK TIME PRINT”. Enter the time and press this field.
SB DATE PRINT	Press [YES] or [NO] in this field to select whether or not to print the sell-by date.
SB TIME PRINT	Press [<] or [>] button to select a desired sell-by time printing method. 0: No print 1: Designated time 2: Relative time
SB TIME DATA	This field is available only when “Yes” is selected in “SB TIME PRINT”. Enter the number of hours and press this field.
SHELF LIFE (days)	This field is available only when “Yes” is selected in “SB DATE PRINT”. Enter the number of days and press this field.
USE BY DATE PRINT	Press [YES] or [NO] in this field to select whether or not to print the use-by date.
UB DATE DATA	This field is available only when “Yes” is selected in “USE BY DATE PRINT”. Enter the number of hours and press this field.

15.

Press the “CODE” tab to display the “PLU Initial Data (Code)” screen.

PLU INITIAL DATA (CODE)

21-02-2013 (THU) 14:30

ITEMCODE

00000000

REG. CODE

0

POS FLAG

02

BARCODE

0000000000000000

POS REFERENCE

< 0:REFER >

BARCODE TYPE

0:REFER

POS FORMAT (WGT)

REFER

TRACE ENABLE

YES NO

DEPARTMENT No.

0

GROUP No.

00

SALE1

SALE2

MSG.

IMAGE

PRINT

DATE


CODE

LINK


ITEM	DESCRIPTIONS																																							
ITEM CODE	Enter an item code and press this field.																																							
REG CODE	Enter the register code and press this field.																																							
POS FLAG	This field is available only when “1: PLU File” is selected in “POS REFERENCE”. Enter a POS flag number and press this field.																																							
BARCODE	Enter a barcode number and press this field.																																							
POS REFERENCE	Press [<] or [>] button to select a desired reference method.																																							
	0: Refer 1: PLU file																																							
BARCODE TYPE	This field is available only when “1: PLU File” is selected in “POS REFERENCE”. Press this field to display the “Barcode Type” screen, and press a desired PLU type for selection.																																							
	BARCODE TYPE18-02-2013 (MON) 11:291/1 <table><tr><td>000</td><td>REFER</td><td>010</td><td>ITF</td></tr><tr><td>001</td><td>EAN/UPC 13</td><td>011</td><td>Not Available</td></tr><tr><td>002</td><td>EAN/UPC 8</td><td></td><td></td></tr><tr><td>003</td><td>10 DIGITS 13</td><td></td><td></td></tr><tr><td>004</td><td>5 DIGITS 8</td><td></td><td></td></tr><tr><td>005</td><td>GS1</td><td></td><td></td></tr><tr><td>006</td><td>GS1 ST</td><td></td><td></td></tr><tr><td>007</td><td>GS1 STO</td><td></td><td></td></tr><tr><td>008</td><td>GS1 LIM</td><td></td><td></td></tr><tr><td>009</td><td>GS1 EXP</td><td></td><td></td></tr></table>	000	REFER	010	ITF	001	EAN/UPC 13	011	Not Available	002	EAN/UPC 8			003	10 DIGITS 13			004	5 DIGITS 8			005	GS1			006	GS1 ST			007	GS1 STO			008	GS1 LIM			009	GS1 EXP	
000	REFER	010	ITF																																					
001	EAN/UPC 13	011	Not Available																																					
002	EAN/UPC 8																																							
003	10 DIGITS 13																																							
004	5 DIGITS 8																																							
005	GS1																																							
006	GS1 ST																																							
007	GS1 STO																																							
008	GS1 LIM																																							
009	GS1 EXP																																							

POS FORMAT (WGT)	Press this field to display the “Barcode Format” screen, and press a desired barcode format for selection.  
TRACE ENABLE	Press [YES] or [NO] in this field to select whether or not to enable a traceability function.
DEPARTMENT No.	Press this field to display the “Department” screen. To set a department, press a desired field on the list, or press the “DEPARTMENT No.” field after numerical entry.
GROUP No.	Press this field to display the “Group” screen. To set a group, press a desired field on the list, or press the “GROUP No.” field after numerical entry.

- 16.** Press the “LINK” tab to display the “PLU Initial Data (Link)” screen.

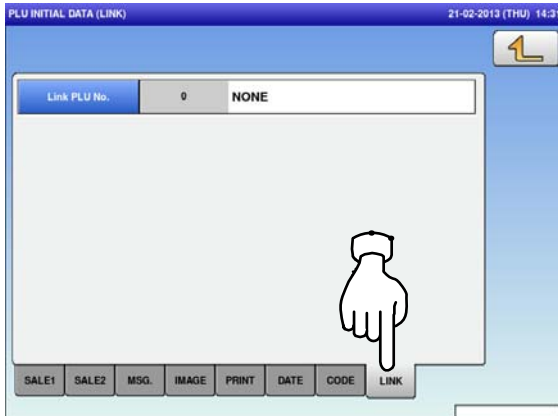


- 17.** Press the Return button to complete the procedure.

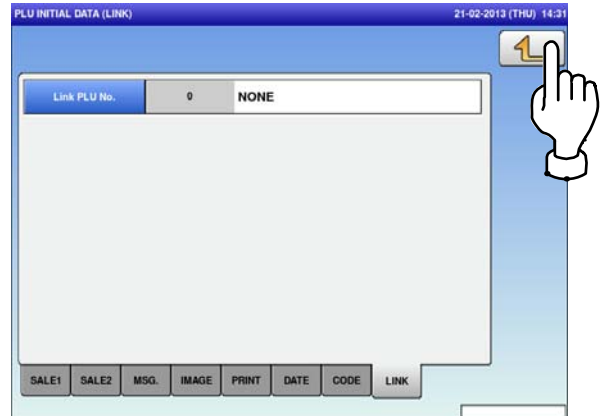

5.10 PLU UPDATE

1. Press the “PLU UPDATE” icon on the menu selection screen.

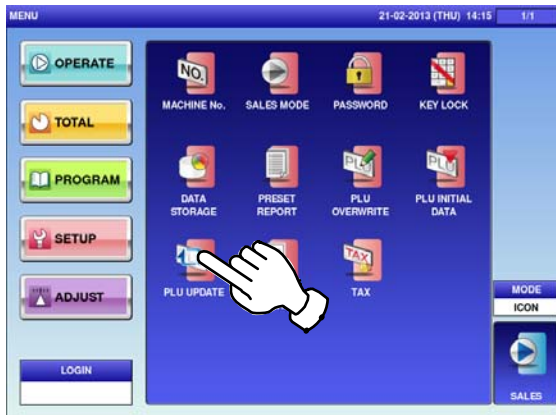

The “PLU Update” screen is displayed. To turn pages, press [▼] or [▲].

Note: Display items may vary depending on the country setting.

The PLU UPDATE screen (Page 1/12) shows a table of items to be updated. The table has columns for No., LIST NAME, REPLACE CONDITION, and CHANGE CONTENTS. The items listed are:

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	ITEM CODE		
2	PACK DATE PRINT		
3	PACK TIME PRINT		
4	PACK TIME DATA		
5	SB DATE PRINT		
6	SB TIME PRINT		

Navigation buttons (▲, ▼, EXEC) are visible on the right side of the screen.

The PLU UPDATE screen (Page 2/12) shows a table of items to be updated. The table has columns for No., LIST NAME, REPLACE CONDITION, and CHANGE CONTENTS. The items listed are:

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
7	SHelf LIFE(days)		
8	SB TIME DATA		
9	USE BY DATE PRINT		
10	UB DATE DATA		
11	NUTRITION No.		
12	SAFE HANDLING IMAGE		

Navigation buttons (▲, ▼, EXEC) are visible on the right side of the screen.

The PLU UPDATE screen (Page 3/12) shows a table of items to be updated. The table has columns for No., LIST NAME, REPLACE CONDITION, and CHANGE CONTENTS. The items listed are:

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
13	SH. IMAGE		
14	POINT FLAG		
15	POINT TYPE		
16	POINTS		
17	FIRST LABEL PRINT		
18	SECOND LABEL PRINT		

Navigation buttons (▲, ▼, EXEC) are visible on the right side of the screen.

The PLU UPDATE screen (Page 4/12) shows a table of items to be updated. The table has columns for No., LIST NAME, REPLACE CONDITION, and CHANGE CONTENTS. The items listed are:

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
19	1st LABEL FORMAT No.		
20	2nd LABEL FORMAT No.		
21	COOKING TIME		
22	FREE MSG.1		
23	FREE MSG.2		
24	FREE MSG.3		

Navigation buttons (▲, ▼, EXEC) are visible on the right side of the screen.

The PLU UPDATE screen (Page 5/12) shows a table of items to be updated. The table has columns for No., LIST NAME, REPLACE CONDITION, and CHANGE CONTENTS. The items listed are:

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
25	FREE MSG.4		
26	FREE MSG.5		
27	FREE MSG.6		
28	FREE MSG.7		
29	FREE MSG.8		
30	FREE MSG.9		

Navigation buttons (▲, ▼, EXEC) are visible on the right side of the screen.

PLU UPDATE21-02-2013 (THU) 14:326/12

CHANGE RANGE

START No.

END No.

00000001

99999999

UNIT PRICE No.

12345

CONDITION

NOYES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
31	FREE MSG.10		
32	FREE MSG.11		
33	FREE MSG.12		
34	FREE MSG.13		
35	FREE MSG.14		
36	FREE MSG.15		

BATCH DELETE

EXEC

PLU UPDATE21-02-2013 (THU) 14:327/12

CHANGE RANGE

START No.

END No.

00000001

99999999

UNIT PRICE No.

12345

CONDITION

NOYES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
37	DISPLAY IMAGE		
38	OPEN PRICE		
39	TRACE ENABLE		
40	TRACE SCHEME No.		
41	1st LABEL FMT No.(A)		
42	DEPARTMENT No.		

BATCH DELETE

EXEC

PLU UPDATE21-02-2013 (THU) 14:328/12

CHANGE RANGE

START No.

END No.

00000001

99999999

UNIT PRICE No.

12345

CONDITION

NOYES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
43	GROUP No.		
44	REG. CODE		
45	SALES MODE		
46	UNIT PRICE		
47	FIXED PRICE		
48	MARKDOWN MODE		

BATCH DELETE

EXEC

PLU UPDATE21-02-2013 (THU) 14:329/12

CHANGE RANGE

START No.

END No.

00000001

99999999

UNIT PRICE No.

12345

CONDITION

NOYES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
49	M/D AMOUNT		
50	FIXED WEIGHT		
51	QTY		
52	UNIT TYPE		
53	UPPER WGT		
54	LOWER WGT		

BATCH DELETE

EXEC

PLU UPDATE21-02-2013 (THU) 14:3210/12

CHANGE RANGE

START No.

END No.

00000001

99999999

UNIT PRICE No.

12345

CONDITION

NOYES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
55	TARE		
56	2nd TARE		
57	BARCODE TYPE		
58	POS REFERENCE		
59	POS FLAG		
60	BARCODE		

BATCH DELETE

EXEC

PLU UPDATE21-02-2013 (THU) 14:3211/12

CHANGE RANGE

START No.

END No.

00000001

99999999

UNIT PRICE No.

12345

CONDITION

NOYES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
61	POS FORMAT		
62	EXTRA MSG.1		
63	INGREDIENT		
64	EXTRA MSG.3		
65	POP MSG.		
66	COUPON MSG.		

BATCH DELETE

EXEC

PLU UPDATE21-02-2013 (THU) 14:3212/12

CHANGE RANGE

START No.

END No.

00000001

99999999

UNIT PRICE No.

12345

CONDITION

NOYES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
67	IMAGE 1		
68	IMAGE 2		
69	IMAGE 3		

BATCH DELETE

EXEC

PLU UPDATE21-02-2013 (THU) 14:311/12

CHANGE RANGE

START No.

END No.

00000001

99999999

UNIT PRICE No.

12345

CONDITION

NOYES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	CODE		
2	PACK DATE PRINT		
3	PACK TIME PRINT		
4	PACK TIME DATA		
5	SB DATE PRINT		
6	SB TIME PRINT		

BATCH DELETE

EXEC

2.

Enter the start and end numbers and press these fields respectively to specify the target PLUs.

3. Press desired items for selection.

PLU UPDATE 21-02-2013 (THU) 14:33 1/12

CHANGE RANGE

START No. 00000001 END No. 99999999

UNIT PRICE No. 1 2 3 4 5

CONDITION NO YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	ITEM CODE	0	0
2	PACK DATE PRINT		
3	PACK TIME PRINT	2:CLOCK	2:CLOCK
4	PACK TIME DATA		
5	SB DATE PRINT	1:YSS	1:YSS
6	SB TIME PRINT		

BATCH DELETE EXEC

PLU UPDATE 21-02-2013 (THU) 14:33 2/12

CHANGE RANGE

START No. 00000001 END No. 99999999

UNIT PRICE No. 1 2 3 4 5

CONDITION NO YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
7	SHELF LIFE(days)	NEXT DAY(1Day)	NEXT DAY(1Day)
8	SB TIME DATA	0 HOUR(s) AFTER	0 HOUR(s) AFTER
9	USE BY DATE PRINT	2:NO	2:NO
10	UB DATE DATA	TODAY(0Day)	TODAY(0Day)
11	NUTRITION No.	0	0
12	SAFE HANDLING IMAGE		

BATCH DELETE EXEC

Note 1: To clear the selection, press the selected field again.

Note 2: To clear all selections at one time, press the [BATCH DELETE] button.

The confirmation screen is displayed.

Press [EXEC] to renew all data, or [STOP] to go back.

4. Press the [EXEC] button to update the selected items.

PLU UPDATE 21-02-2013 (THU) 14:33 2/12

CHANGE RANGE

START No. 00000001 END No. 99999999

UNIT PRICE No. 1 2 3 4 5

CONDITION NO YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
7	SHELF LIFE(days)	NEXT DAY(1Day)	NEXT DAY(1Day)
8	SB TIME DATA	0 HOUR(s) AFTER	0 HOUR(s) AFTER
9	USE BY DATE PRINT	2:NO	2:NO
10	UB DATE DATA	TODAY(0Day)	TODAY(0Day)
11	NUTRITION No.	0	0
12	SAFE HANDLING IMAGE		

BATCH DELETE EXEC

5.

PLU UPDATE 21-02-2013 (THU) 14:34 2/12

ALL REUPDATE CHECK


IT IS OK TO RENEW ALL DATA FOR PRODUCT?

14003 - 0000

EXEC STOP

5.11 RECEIPT SETTING


1. Press the "RECEIPT SETTING" icon on the menu selection screen.

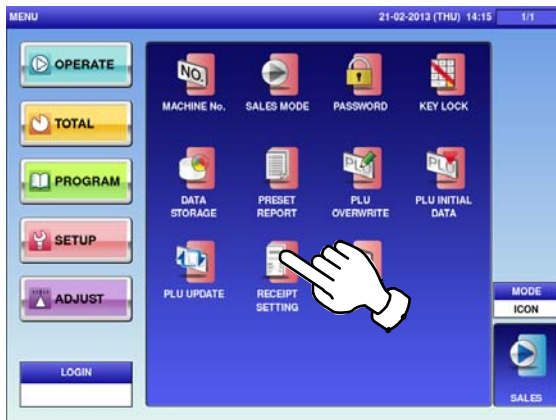

2. The "Receipt Setting (Title)" screen is displayed. To edit the header and footer titles, press the corresponding field.




3. The text edit screen is displayed. Edit the text according to the procedure described in Appendix "Text Editing".

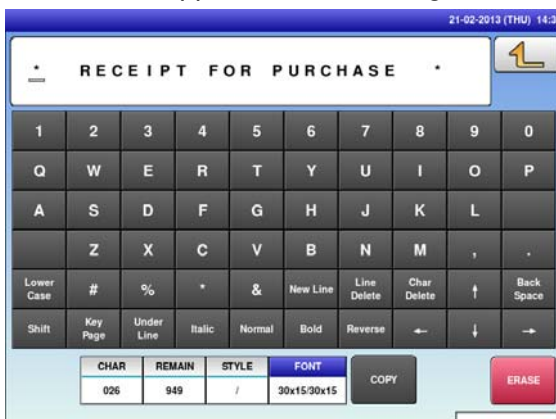


4. To finish the editing, press the Return button on the screen.




5. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

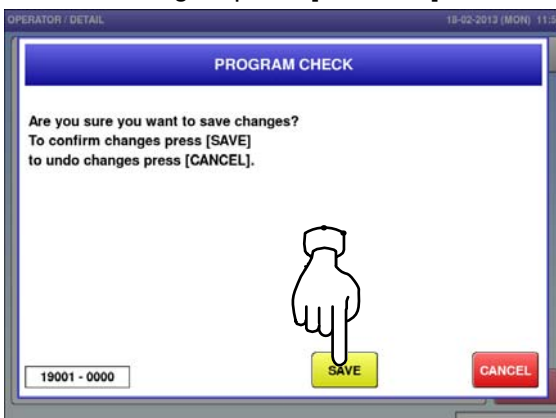


6. To edit the header and footer logo images, press the corresponding field.

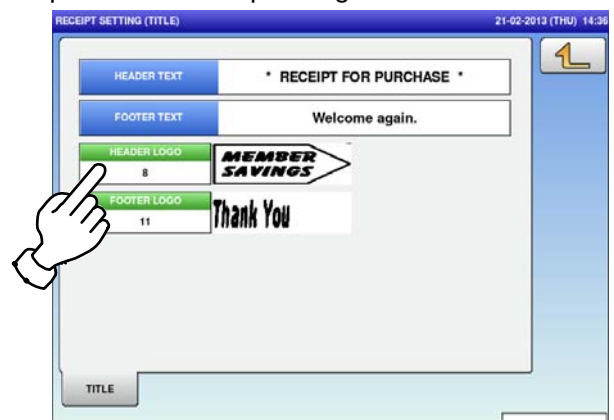

7. The “Header Image” screen is displayed.

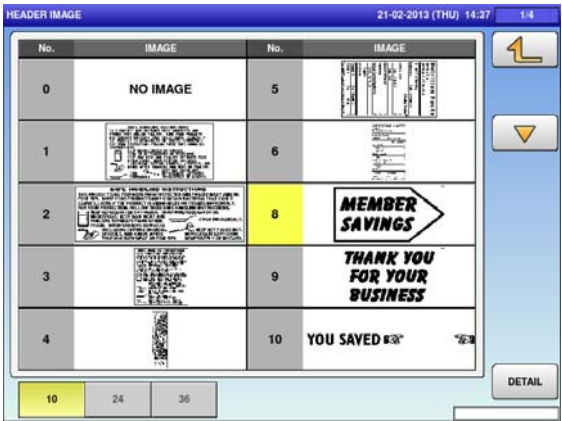

8. Press a desired image for selection.

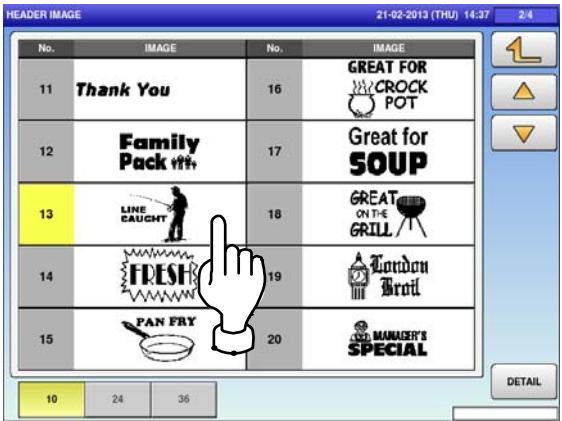


9. The selected logo image has been registered.



5.12 tax registration

1. Press the “TAX” icon on the menu selection screen.

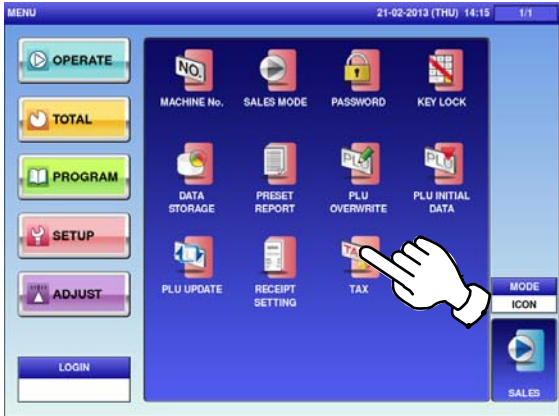

2. The “Tax” screen is displayed.

TAX					21-02-2013 (THU) 14:46
TAX No.	TAX TYPE			TAX RATE	
0	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
1	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
2	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
3	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
4	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
5	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
6	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
7	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
8	EXCLUDED	INCLUDED	EXEMPT	5.00 %	
9	EXCLUDED	INCLUDED	EXEMPT	5.00 %	

ITEM	DESCRIPTIONS
TAX TYPE	Press a desired tax type for selection. Exclusive tax Inclusive tax Tax exemption
TAX RATE	Enter a numerical value and press the applicable field.

ADJUSTMENT MODE


6.1 ADJUSTMENT MODE ENTRY / EXIT

1. Ensure that the initial screen is displayed. Then, press the Return button on the screen to display the "Menu" screen.


Note: The content of the initial screen may differ depending on the settings on your machine.



2. The "Menu" screen is displayed. Then, press the [ADJUST] button.

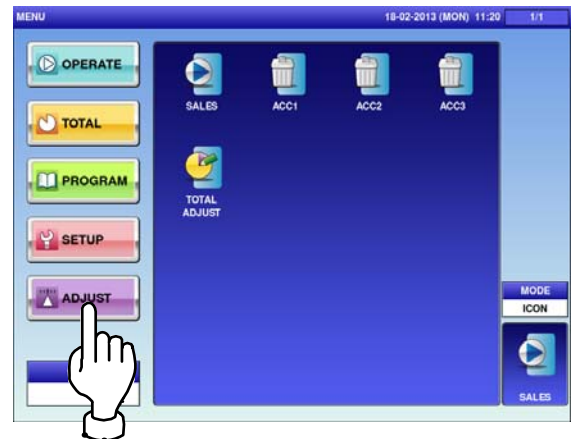

➔ The adjustment menu selection screen is displayed.

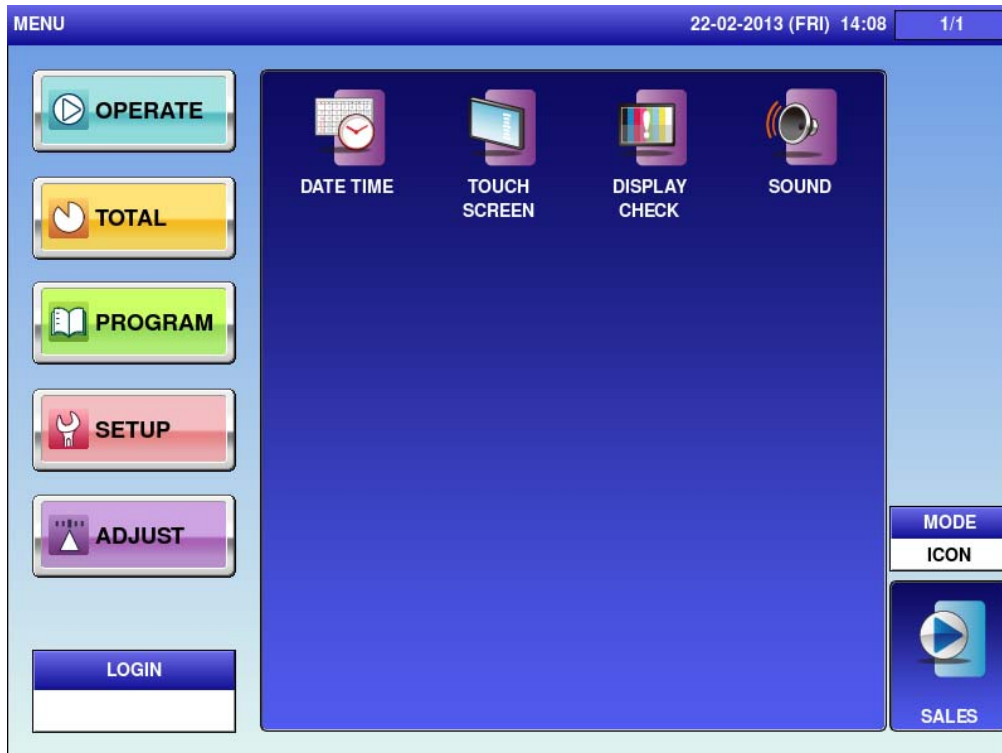

Note: To exit the Adjustment Mode, press the [SALES] button.

6.2 DATE / TIME

1. Press the “DATE TIME” icon on the menu selection screen.




➔ The “Date / Time” screen is displayed.



2. To change the date, press the “DATE” field and enter a new date data. Then, press the [SET] key.


EXAMPLE 22 June, 2007

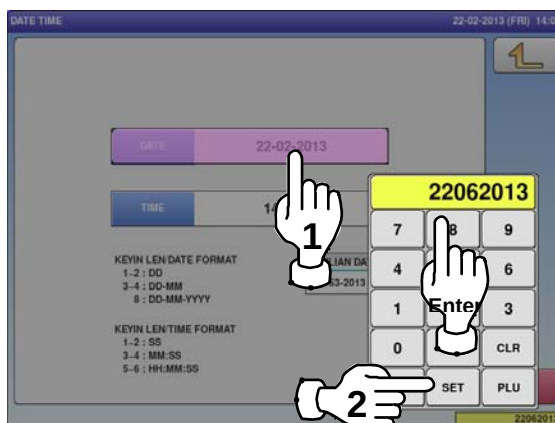


3. To change the time, press the “TIME” field and enter a new time data. Then, press the [SET] key.

EXAMPLE 13:50:00




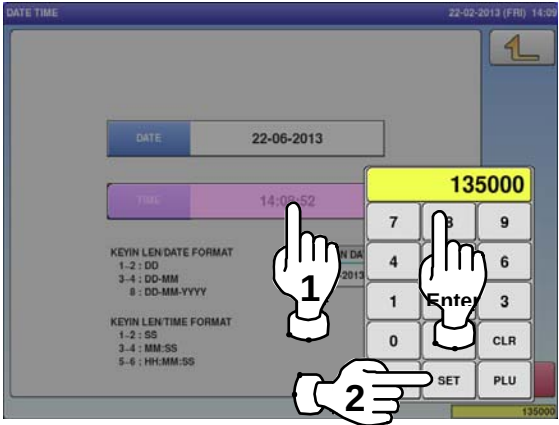

4. To register new date and time, press the [SET] button.

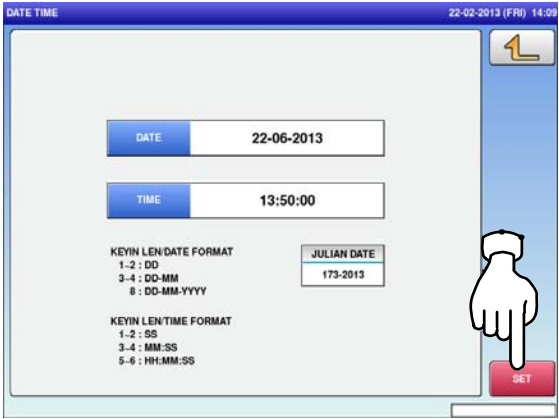

5. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

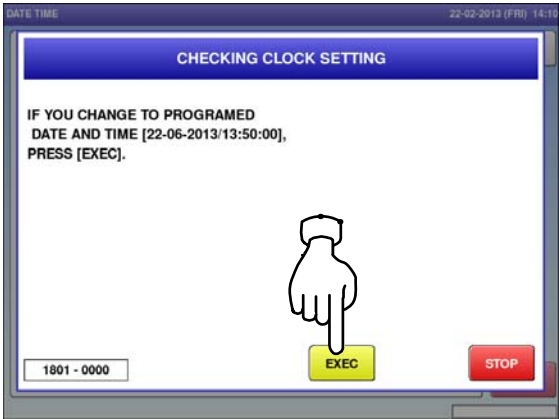


6.3 TOUCH SCREEN


1. Press the "TOUCH SCREEN" icon on the menu selection screen.




➔ The "Touch Screen" screen is displayed.

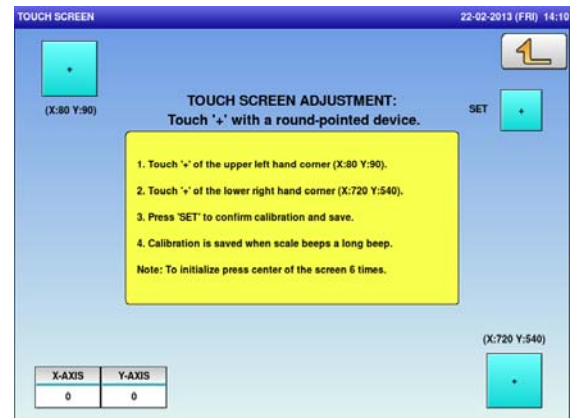


2. Press [+] on the button at the upper left of the screen with a round-pointed device.

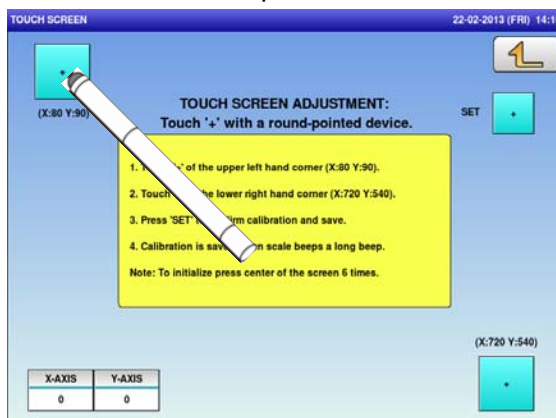

3. Press [+] on the button at the lower right of the screen.

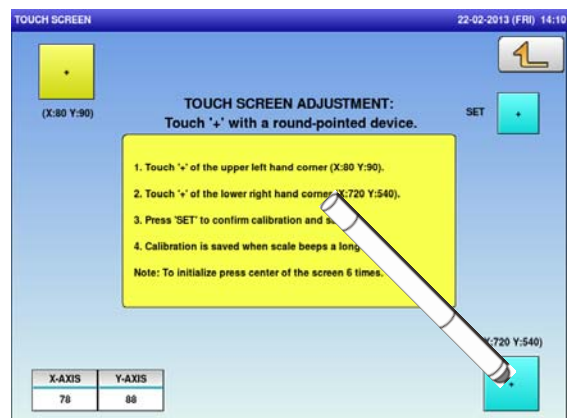

4. Press [+] on the [SET] button to confirm calibration and save.

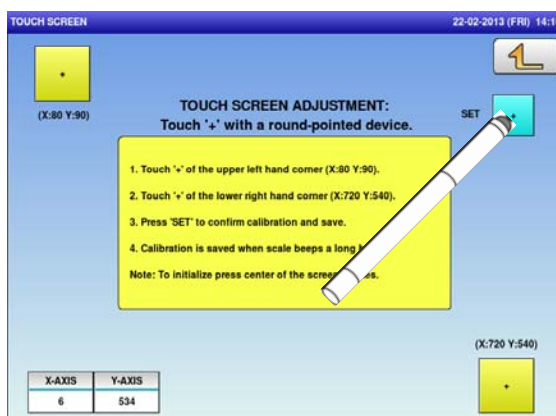


6.4 DISPLAY CHECK

1. Press the “DISPLAY CHECK” icon on the menu selection screen.




2. The “Display Check (Vertical)” screen is displayed. Press [-] or [+] to adjust the vertical brightness for operator and customer displays.

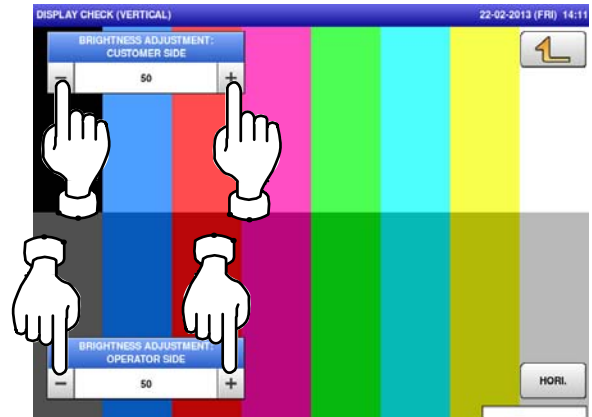

3. Press the [HORIZONTAL] button to change to the horizontal display check screen.



4. The “Display Check (Horizontal)” screen is displayed. Press [-] or [+] to adjust the horizontal brightness for operator and customer displays.

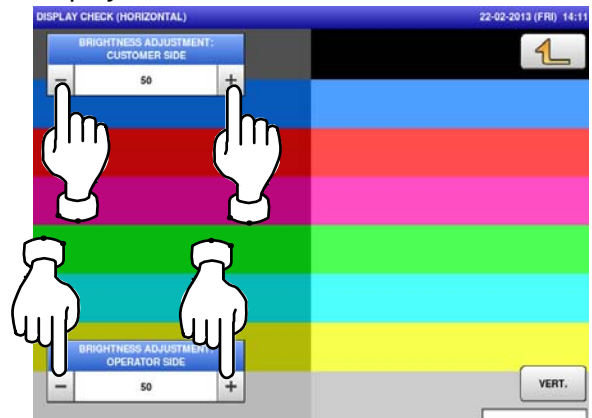


6.5 SOUND

1. Press the “DISPLAY CHECK” icon on the menu selection screen.



2. The “Sound” screen is displayed. To set sound levels, press “ON” in the “Sound” field and press [<] or [>].

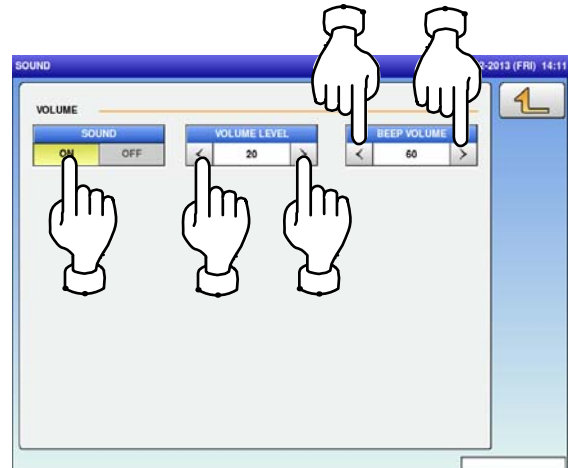



TEXT EDITING

A.1 EDIT SCREENS

Upper-case mode

EXTRA MSG.1 / EDIT

22-02-2013 (FRI) 19:08

Used to finalize the editing

1	2	3	4	5	6	7	8	9	0
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.
Lower Case	#	%	*	&	New Line	Line Delete	Char Delete	↑	Back Space
Shift	Key Page	Under Line	Italic	Normal	Bold	Reverse	←	↓	→

No.3

CHAR000

REMAIN4092

STYLE/

FONT30x15/40x20

COPY

ERASE

Displays the called number

Displays the number of input characters

Displays the number of remaining characters

Press this field to select a desired font size

Press this field to select a desired font style

Lower-case mode

EXTRA MSG.1 / EDIT

22-02-2013 (FRI) 19:08



1	2	3	4	5	6	7	8	9	0
q	w	e	r	t	y	u	i	o	p
a	s	d	f	g	h	j	k	l	/
	z	x	c	v	b	n	m	C	E
Lower Case	#	%	*	&	New Line	Line Delete	Char Delete	↑	Back Space
Shift	Key Page	Under Line	Italic	Normal	Bold	Reverse	←	↓	→

No.	CHAR	REMAIN	STYLE	FONT	COPY	ERASE
3	000	4092	/	30x15/40x20		

A.2 EDIT KEYS

Lower Case	Used to switch between lower-case and upper-case character modes.	Normal	Used to specify a normal character style.
New Line	Used to begin a new line.	Bold	Used to specify a bold character font style.
Line Delete	Used to delete a line text at the place where the cursor is placed.	Reverse	Used to specify a reverse character font style.
Char Delete	Used to delete a character at the place where the cursor is placed.		Used to move the cursor to the right.
Back Space	Used to delete a character by moving the cursor back by one character.		Used to move the cursor to the left.
Under Line	Used to specify an underlined character font style.		Used to move the cursor up.
Italic	Used to specify an Italic character style.		Used to move the cursor down. Also used to select characters for changing the style.
COPY	Used to copy the original data to the current data.		Used to enter a space.
ERASE	Used to erase the full text currently being called.		

Used to display the following key screen.

Key
Page



No.	CHAR	REMAIN	STYLE	FONT
3	012	4080	/	30x15/30x15

Used to display the following key screen.

Shift

EXTRA MSG.1 / EDIT27-02-2013 (WED) 19:47

GOUDA CHEESE

1234567890

!@#\$€±^°{ }:

; " ' < > . ? / ~ `

- + = _ [] \ | ()

Lower Case#%* & New LineLine DeleteChar Delete↑Back Space

ShiftKey PageUnder LineItalicNormalBoldReverse←↓→


No.	CHAR	REMAIN	STYLE	FONT
3	012	4080	/	30x15/30x15

COPYERASE

A.3 INPUT EXAMPLES

A.3.1 TEXT EDITING

1. Enter desired characters using alpha-numeric keys.

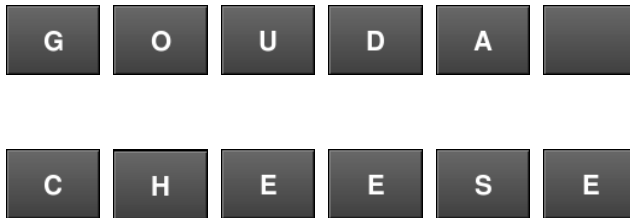

Upper-case characters



Lower-case characters



2. To begin a new line, press the [New Line] key.




Enter desired characters.



3. To register the editing, press the Return button.



4. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

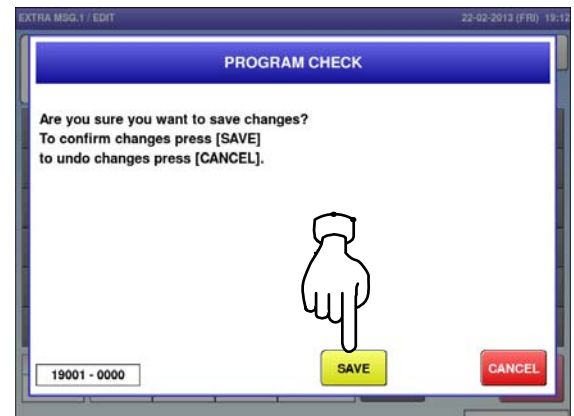



A.3.2 FONT STYLE SELECTION

1. Press the following keys to select a desired font style.



Note: The selected font style is displayed in the “STYLE” display field.


2. Enter desired characters using alpha-numeric keys.

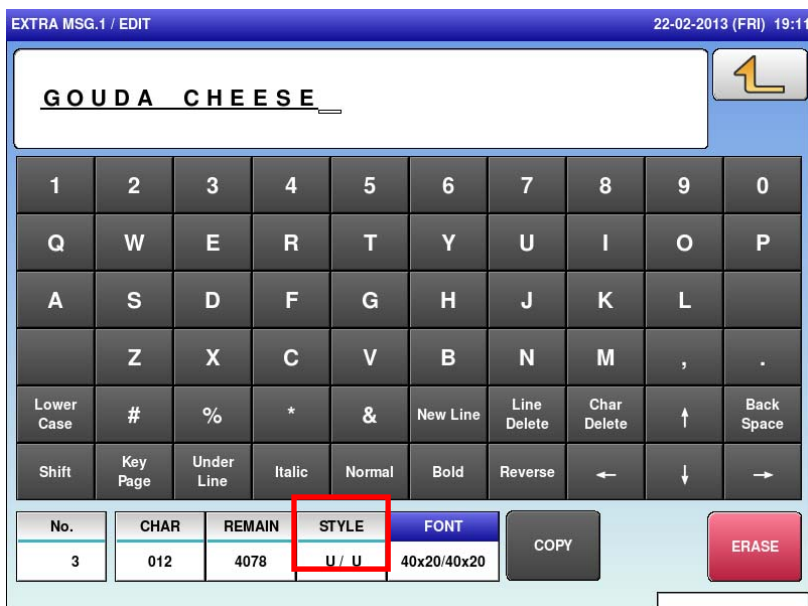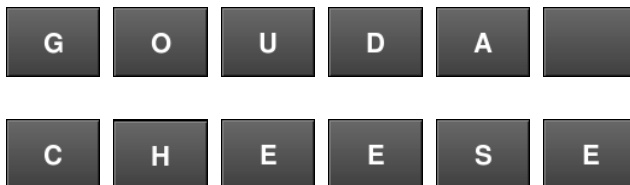

Press the Return key to register the editing.



The confirmation screen is displayed.
To confirm changes, press [SAVE].
To undo changes, press [CANCEL].

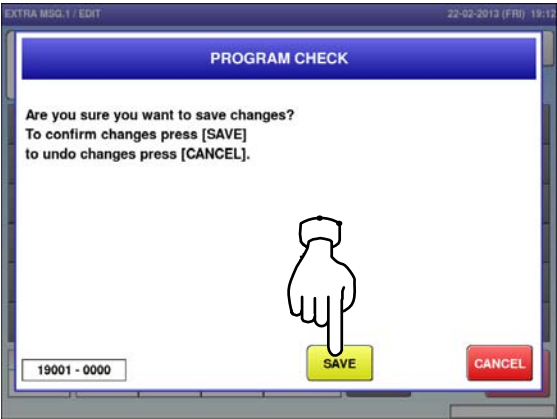

A.3.3 LINE DATA DELETION


1. Press the [Line Delete] key to delete the line data.



2. The line data has been deleted. Press the Return button to register the deletion.



3. The confirmation screen is displayed. To confirm changes, press [SAVE]. To undo changes, press [CANCEL].

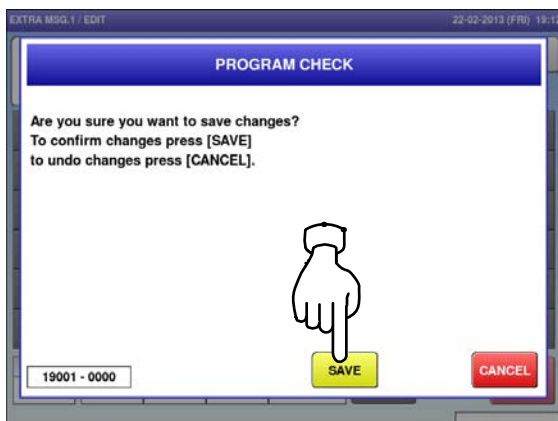


A.3.4 DATA ERASE

1. Press the [ERASE] button to delete the full text currently being called.



2. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

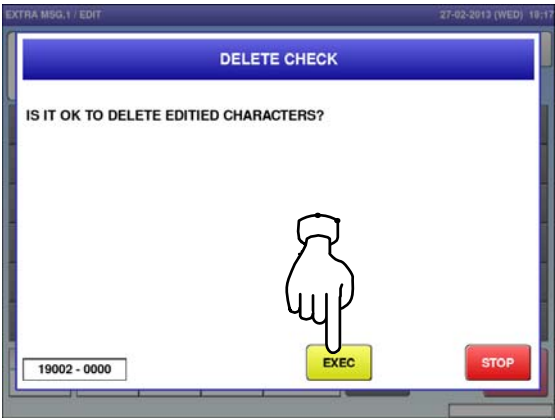


3. The full text has been erased.




A.3.5 DATA COPY


1. To call up a desired string of characters, press the INPUT field at the bottom right of the screen to display the keypad.
2. Then, enter a numerical value and press the [SET] key on the keypad.

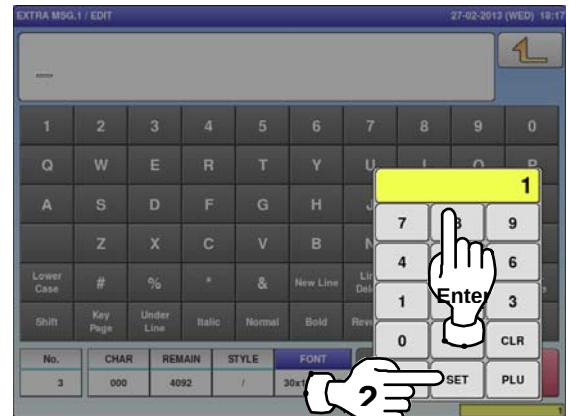

3. Press the [COPY] key while the number is displayed in the INPUT field.
4. The confirmation screen is displayed. Press [EXEC] to continue, or [STOP] to go back.

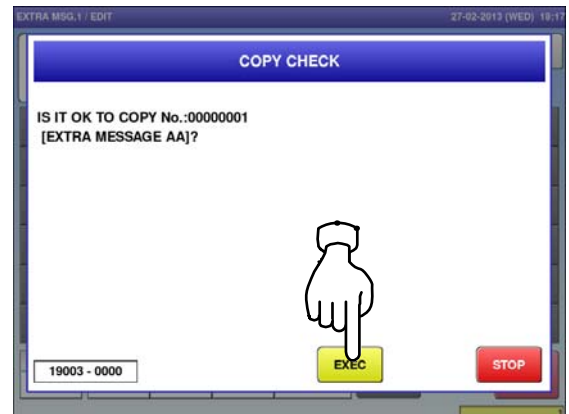

5. The specified text has been copied.

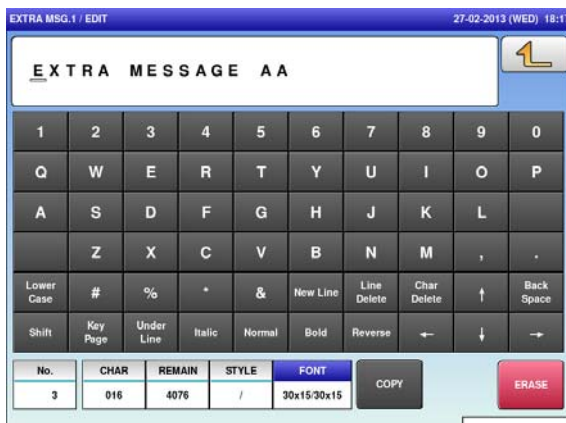



Design and specifications are subject to change without notice.

44 SANNO-CHO, SHOGOIN, SAKYO-KU
KYOTO, 606-8392 JAPAN
PHONE: 81-75-771-4141
FACSIMILE: 81-75-751-1634
URL: <http://www.ishidajapan.com>
